


RC3502 DATASHEET

V.35 SYNCHRONOUS LINE ADAPTER, F 192

■ CCITT V.35
Communications

■ Up to 64 Kbit/s
Transmission Rate

F192 is a synchronous line adapter providing on-board I/O expansion support for CCITT V.35 communications. Plugging directly into the RC3546, 2 channel communications controller base board, F192 provides one V.35 serial communication channel. The transmit and receive clock must be supplied from the modem.

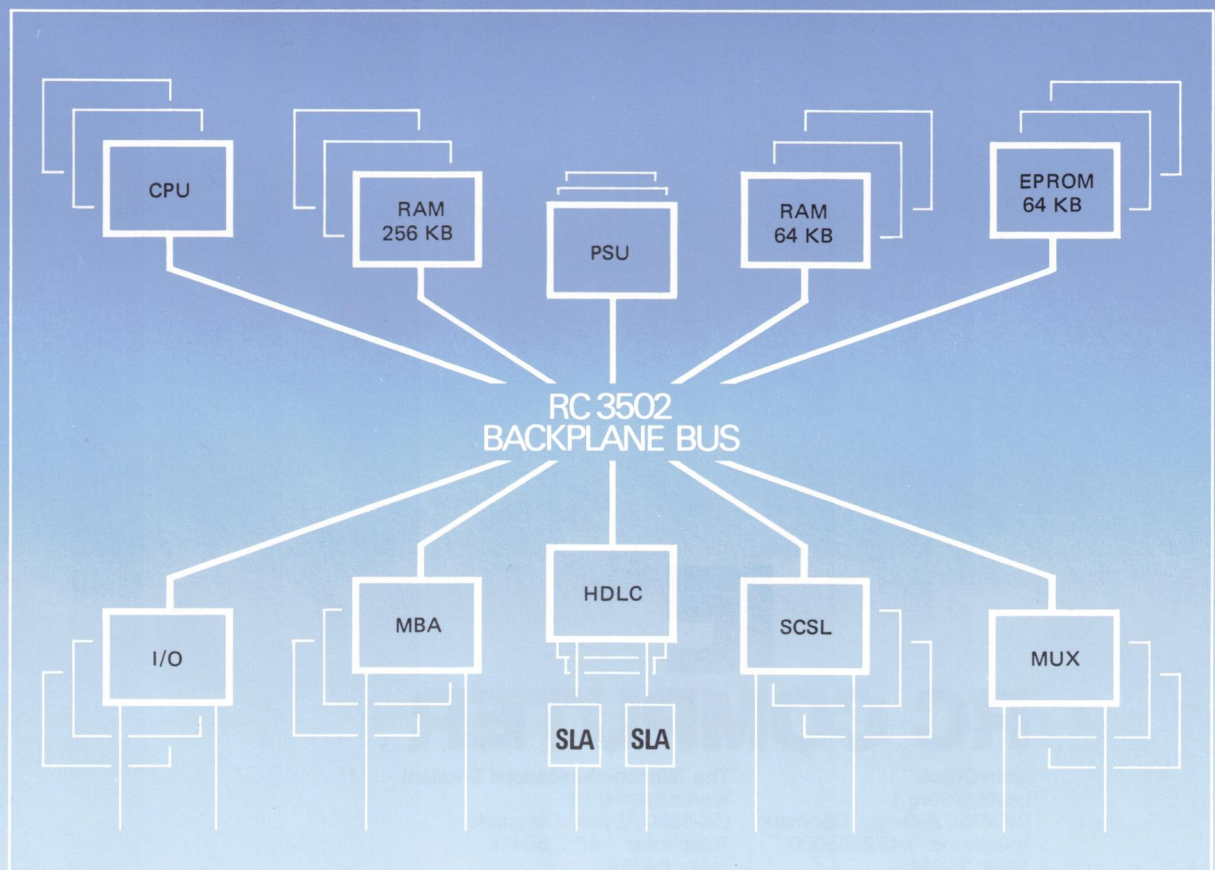

1. Specifications:

- | | |
|-------------------------------------|--|
| 1.1 I/O Channel Interface: | CCITT V.35 |
| 1.2 Number of Full Duplex Channels: | 1 |
| 1.3 Baud Rate: | Up to 64 Kbit/s |
| 1.4 Power Consumption: | +5V/0.6A
+12V/0.025A
-12V/0.025A |
| 1.5 Heat Dissipation: | 27 kcal/h = 113 kJoule/h. |
| 1.6 Cable Assemblies: | Modem: CBL 720 |



RC COMPUTER

Main Office:
Lautrupbjerg 1
DK-2750 Ballerup, Denmark
Telephone: +45 2658000
Telex: 35214

The Telecommunications Division:
Klamsagervej 19
DK-8230 Åbyhøj, Denmark
Telephone: +45 6250411
Telex: 64169