




3600

**CDC 200 UT
TERMINAL**

External BCD

1200 bps to 9600 bps

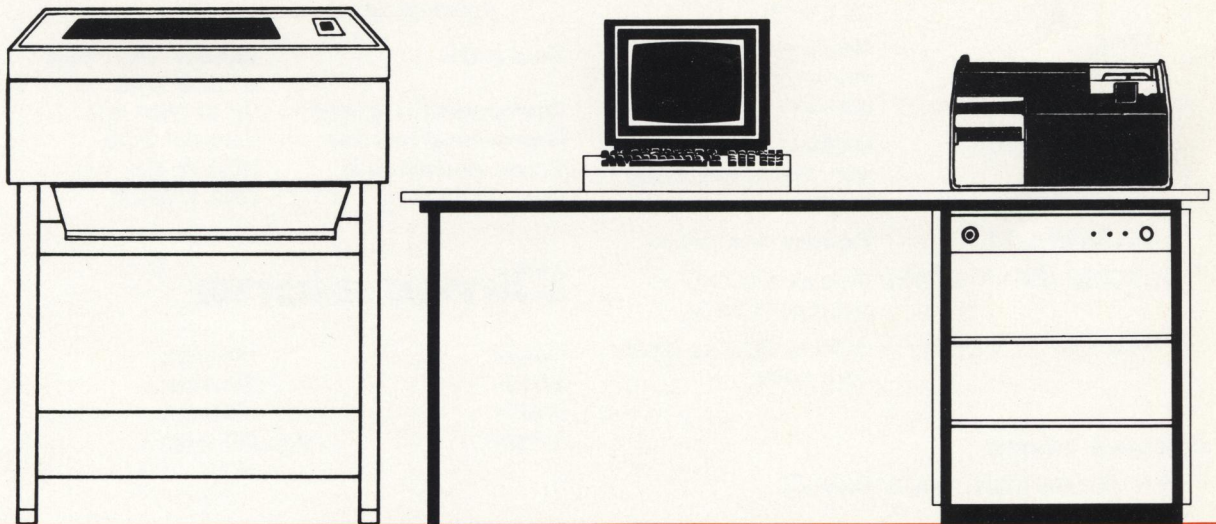

- *Easy to operate*
- *Economic package solution*
- *Upgradeable*
- *CDC 200 UT Terminal compatible*



General

The RC 3600 User Terminal operates according to Control Data specifications given by CDC 200 User Terminal Reference Manuals.

Local operator communication is in natural language. The RC 3600 User Terminal is based on RC 3600 modules and can be upgraded at any time.

FEATURES

- ★ CDC 200 UT communication procedure as supported by SCOPE/INTERCOM or SCOPE/IMPORT/EXPORT.
- ★ Transmission speed: Up to 9600 bps.
- ★ CCITT V24 interface compatible.
- ★ Half or full duplex dial-up or leased line.
- ★ External BCD transmission code.
- ★ EBCDIC or BCD card code.
- ★ Space and zero compression.
- ★ Runtime selection of station address.
- ★ Local keyboard commands:

TERM(INAL STATUS): Information about communication line and peripherals.

STAT(ISTICS): Communication line and card/printline statistics.

DISC(ONNECT): Disconnnet line and restart terminal.

LIST: Off-line listing of cards on printer.

STOP: Stops off-line listing.
PRINT(SCREEN): Prints contents of screen.

RELEASE C(DR): Release cardreader and clear cardreader buffer.

RELEASE L(PT): Release line printer.

EBCDIC (INPUT CODE): Selects EBCDIC as input card code.

BCD (INPUT CODE): Selects BCD as input card code.

CONSOLE DEVICE

F 15 D alphanumeric display keyboard

MODEL CODES

Printers	300 lpm	600 lpm	900 lpm
Cardreaders 300 cpm	9		
600 cpm		23	10

OPTIMUM LINE SPEED

Printers	300 lpm	600 lpm	900 lpm
Cardreaders 300 cpm	2400 bps		
600 cpm		4800 bps	9600 bps

PRINTER CHARACTER SETS

USA/UK: F 330

ABCDEFGHIJKLMNOPQRSTUVWXYZ
0123456789 + - * / () < > = , . : ; % \$ [] ← ↑

DANISH/NORWEGIAN: F 331

ABCDEFGHIJKLMNOPQRSTUVWXYZ
0123456789 + - * / () < > = , . : ; % Å Æ Ø •

SWEDISH/FINNISH: F 332

ABCDEFGHIJKLMNOPQRSTUVWXYZ
0123456789 + - * / () < > = , . : ; % Ä Ö

GERMAN/AUSTRIAN: F 333

ABCDEFGHIJKLMNOPQRSTUVWXYZ
0123456789 + - * / () < > = , . : ; % Ü Ä Ö

All other characters are replaced by a BLANK.

Specifications

Software:

RC 36 - 00 130 CDC 200 UT program
External BCD version
The software is supplied on 80 col. binary punched cards

Card code: EBCDIC (IBM 029)
or CDC BCD

Communication speed: Up to 9600 bps


Communication code: External BCD

Power consumption: 2880 W, 220 VAC

Heat dissipation: 2500 KCAL/h

Dimensions

Height: 116.8 cm
Width: 354.4 cm
Depth: 80,0 cm
Weight: max.561.0 kg

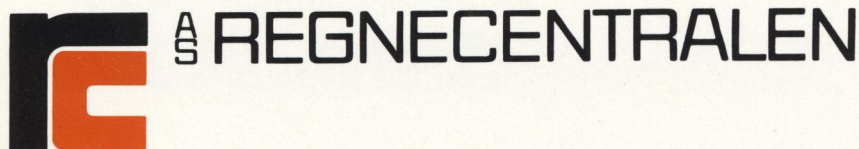

Your RC-Supplier: