
Title:

Drawings for LAM 108/116

 **REGNECENTRALEN**

RC SYSTEM LIBRARY: FALKONERALLE 1 DK-2000 COPENHAGEN F

RCSL No: 52-AA 696

Edition: Oct 1977

Author: Knud E. Hansen

Keywords:

RC 3500 , RC 35-103/104 , LAM 108/116

Abstract:

CONTENTS

Dwg. No.

Card Survey LAM 108 all serial before 4.....	A22269
LAM 116	A23487
LAM 108 after serial 3	A23488
Pos. 5 IOI 1	A11552
IOI 2	A13057
IOI 3	A11554
IOI 4	A22089
IOI 5	A22090
IOI 6	A11669
IOI 7	A11555
IOI 8	A13058
Pos. 4 TRU 1	A11530
TRU 2	A11531
TRU 3	A11532
TRU 4	A11533
TRU 5	A11534
TRU 6	A11535
TRU 7	A11536
TRU 8	A11537
TRU 9	A11538
TRU 10	A11539
Pos. 3 TRU 11	A11652
TRU 12	A11653
TRU 13	A11654
TRU 14	A11655
TRU 15	A11656
TRU 16	A11657
TRU 17	A11658
TRU 18	A11659

CONTENTS CONTINUED

Dwg. No.

	TRU 19	A11660
	TRU 20	A11661
Pos. 2	MIS 1	A11545
	MIS 2	A11546
	MIS 3	A11547
	MIS 4	A11548
	MIS 5	A11549
	MIS 6	A11550
	MIS 7	A11551
	MIS 8	A11662
	MIS 9	A11663
	MIS 10	A11664
	MIS 11	A11665
	MIS 12	A11666
	MIS 13	A11667
	MIS 14	A11668

MODULE POWER SUPPLY PLACEMENT :

RC 3243-1 LAM 108 all serial before 4	A11651
RC 3282-10 LAM 108 after serial 3	A23449
RC 3282-11 LAM 116	A23965

TIMING CHART :

TC 1	A11670
TC 2	A11671

JACK SURVEY :

LAM 108	A22312
LAM 116	A22311

JACKLIST :

J 1	A22117
J 2	A22118
J 3	A22119
J 4	A22120
J 5	A22121
J 6	A22122
J 7	A22123
J 8	A22124
J 9	A22125
J 10	A22126
J 11	A22127
J 12	A22128
J 13	A22129
J 14	A22130
J 15	A22131
J 16	A22132
J 17	A22133
PLUG LIST P 0	A23485
JACK LIST J 0 CBL 39	A23486
PLUG LIST P 1 CBL 10	A22134
P 2 - P 17 TO MODEM CBL 8	A22135
P 2 - P 17 TO TTY CBL 7	A22136

730718 KNEH 730718 AGS 730718 LLM


Pos. 2	RC 3234 - 1	Motherboard RC 3251
Pos. 3	SPARE	
Pos. 4	RC 3233 - 1	
Pos. 5	RC 3232 - 1	

Set fra trådningside

MKP 104

RC 3243 - 1

730828 KNE:: 760112 OKJ

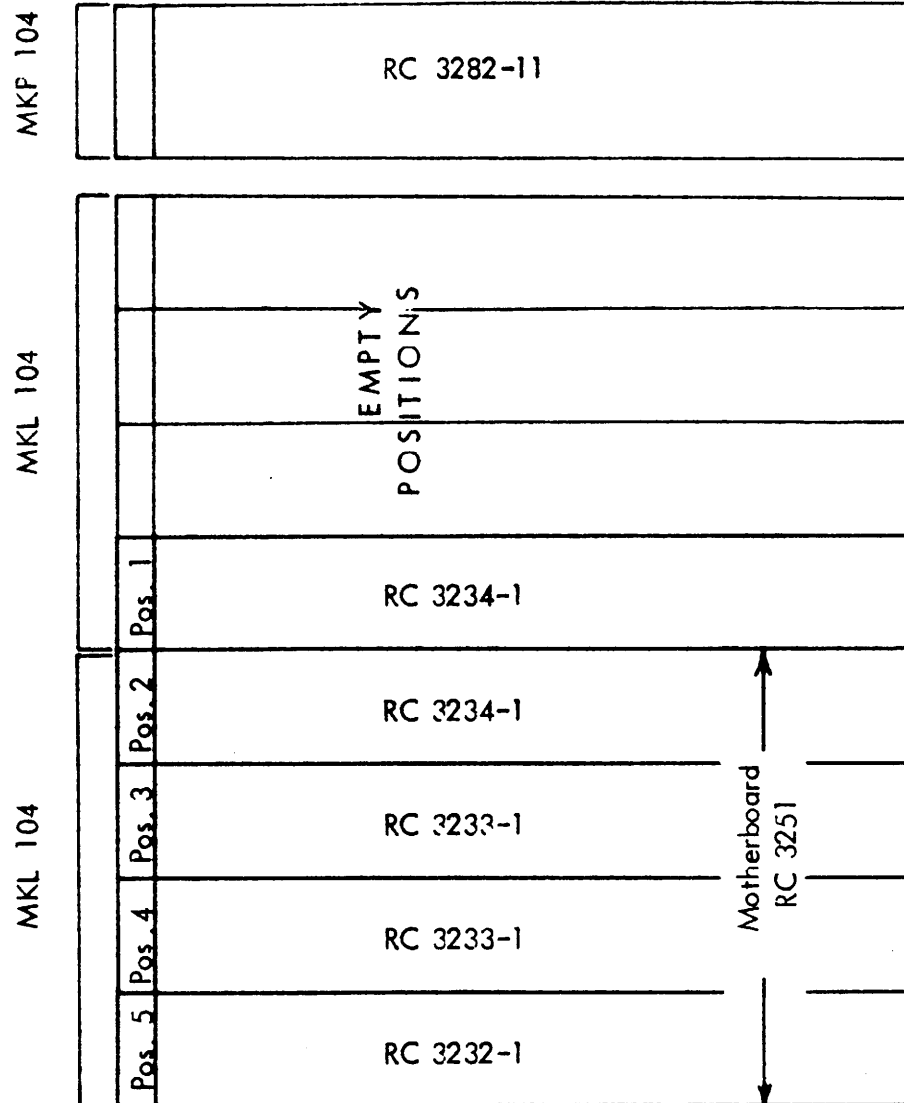

Seen from wiring side.



730718 KNEH 750217 AGS 750217 LLM

Pos. 2	RC 3234 - 1	Motherboard RC 3251
Pos. 3	SPARE	
Pos. 4	RC 3233 - 1	
Pos. 5	RC 3232 - 1	


Set fra trådningsside


MKP 104

RC 3282-10

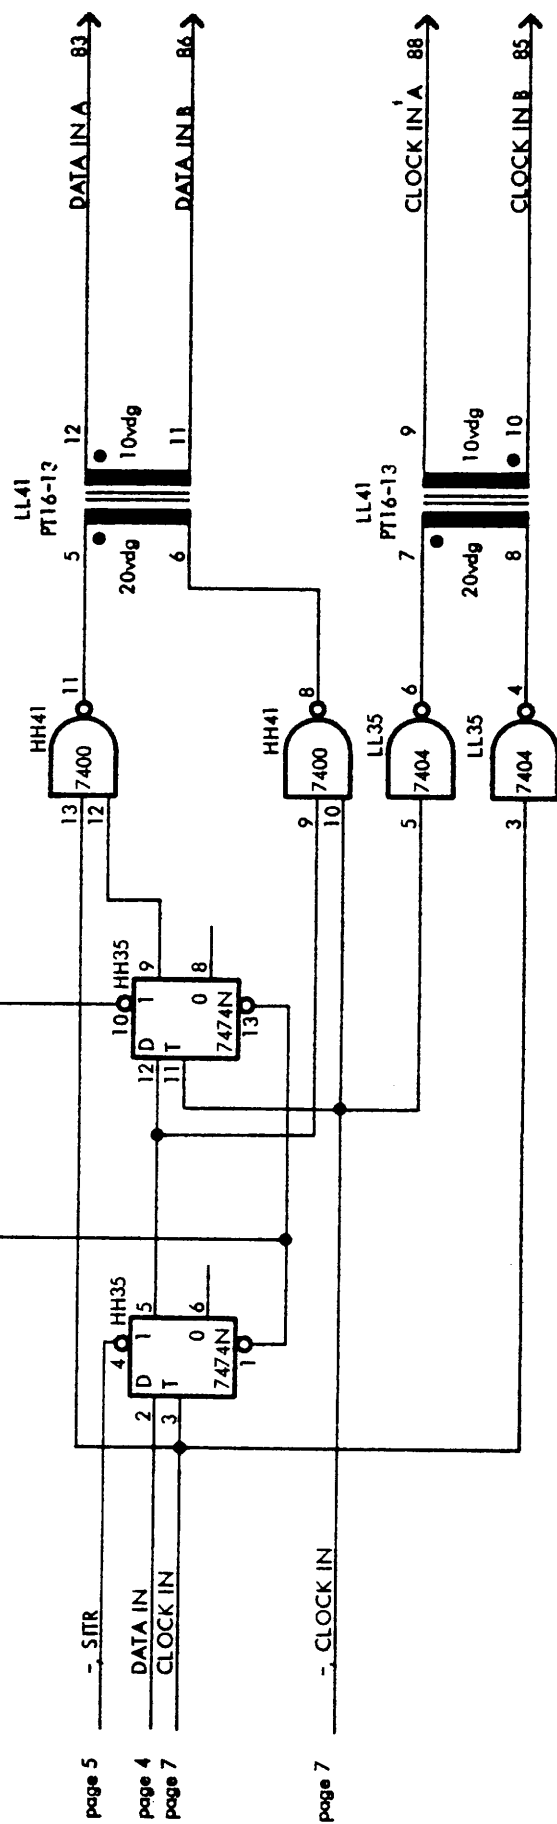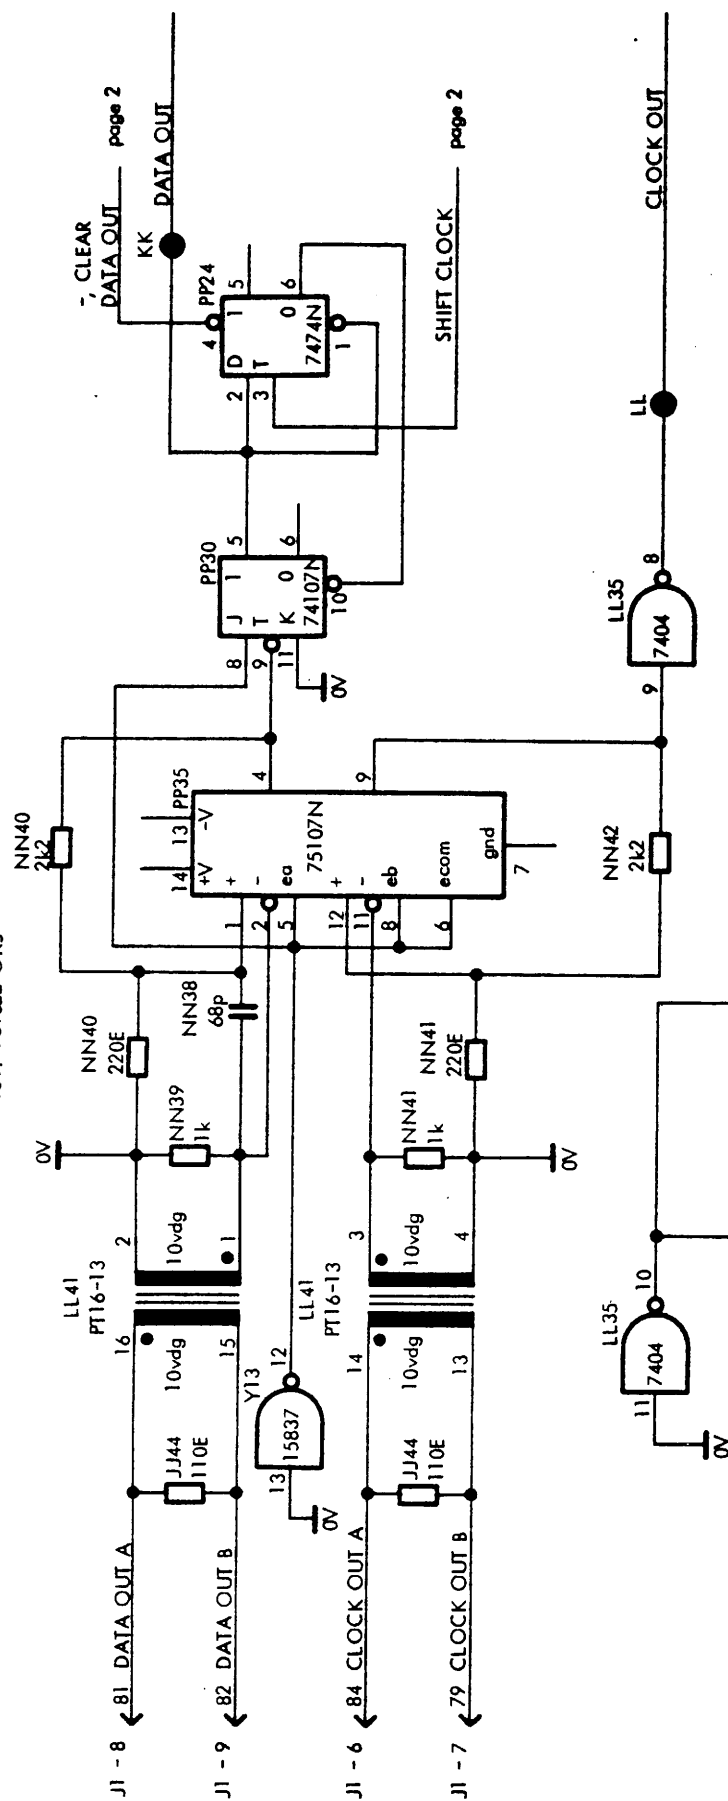


7721219 KNEH 730723 IGH 730821 LLM

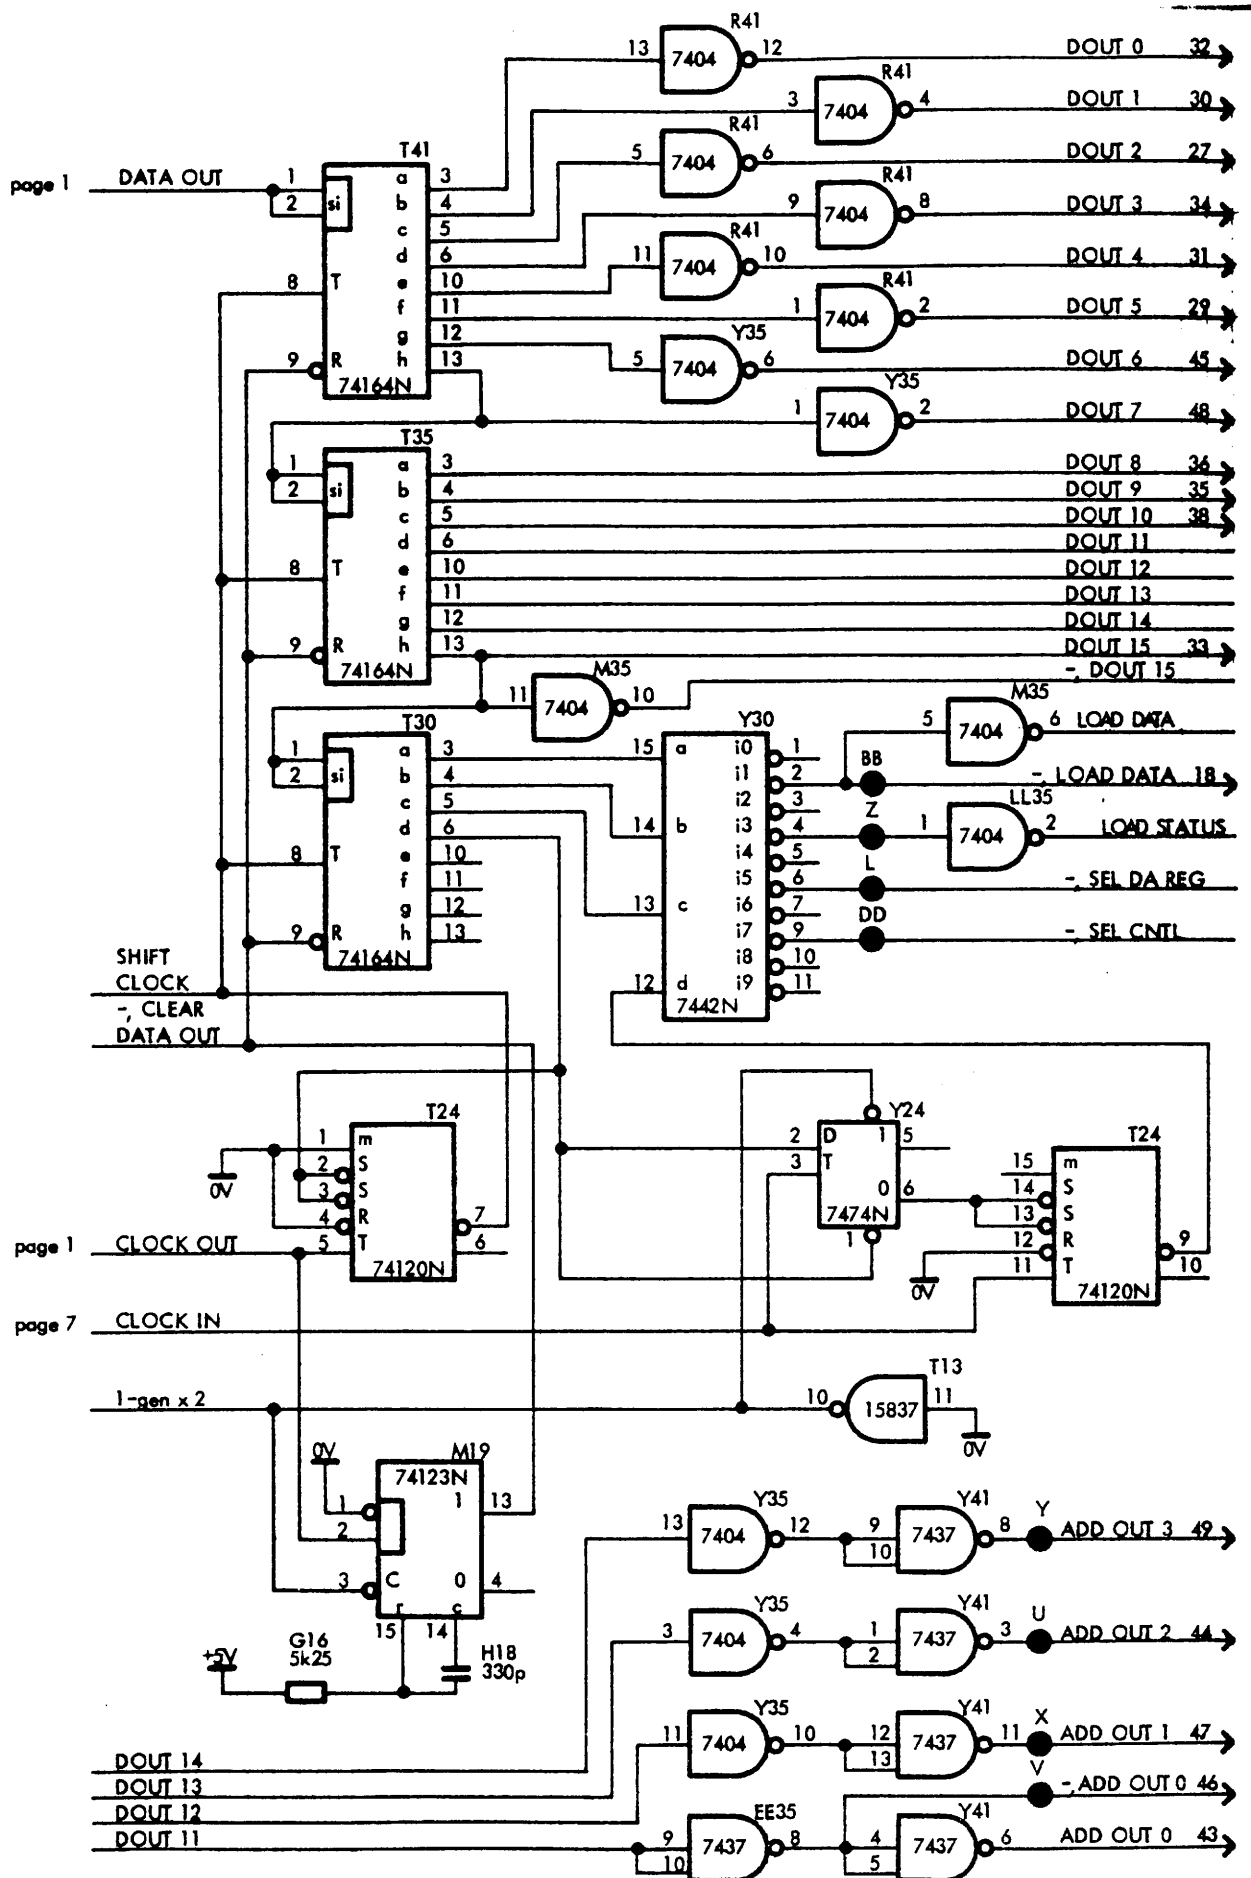

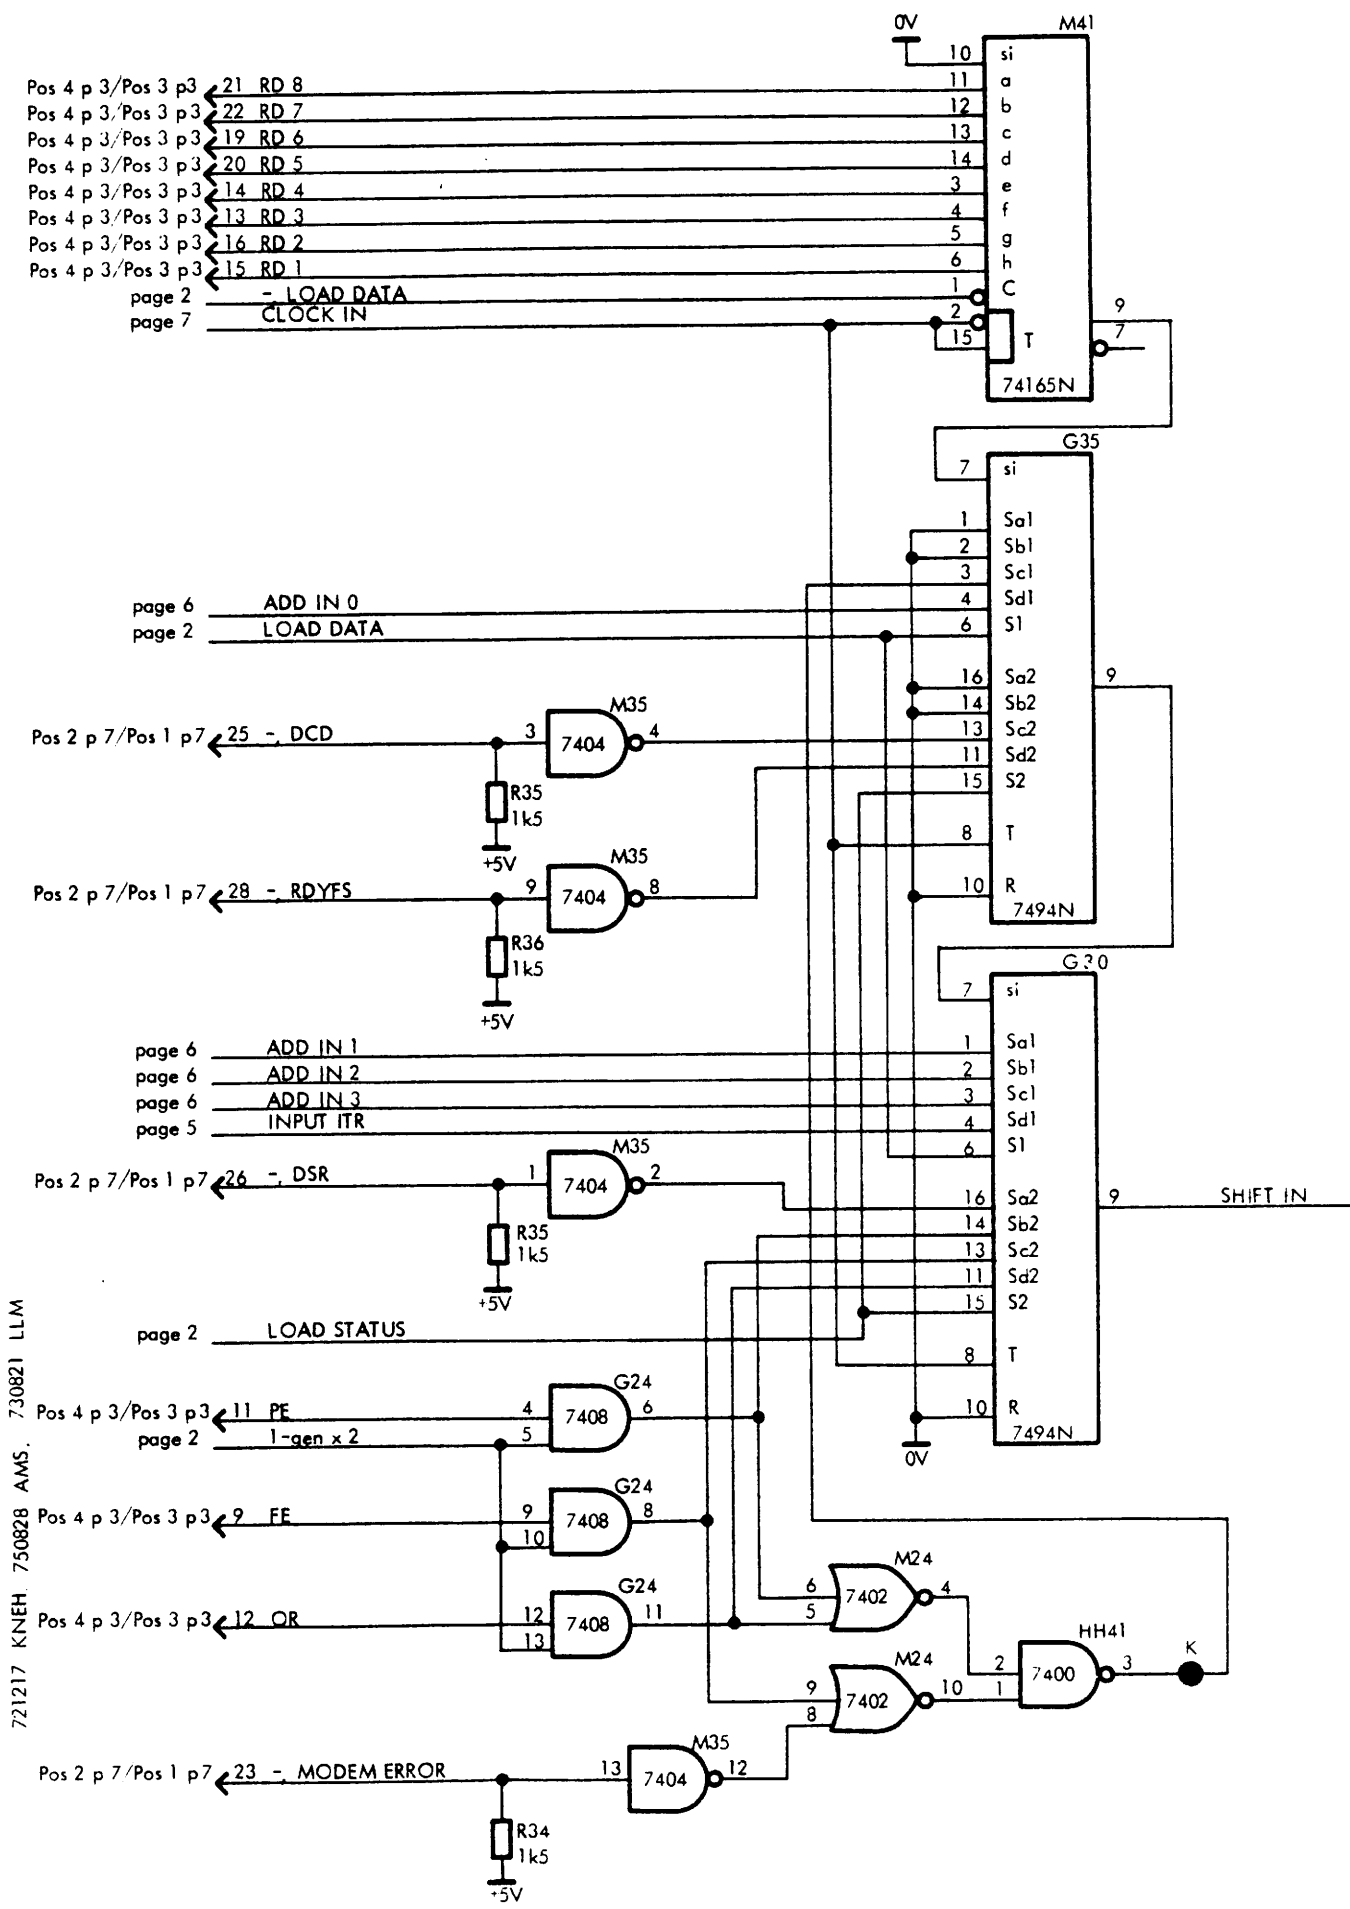

721217 KNEH 750828 AMS, 730821 LLM


721217 KNEH 730723 IGH 730821 LLM

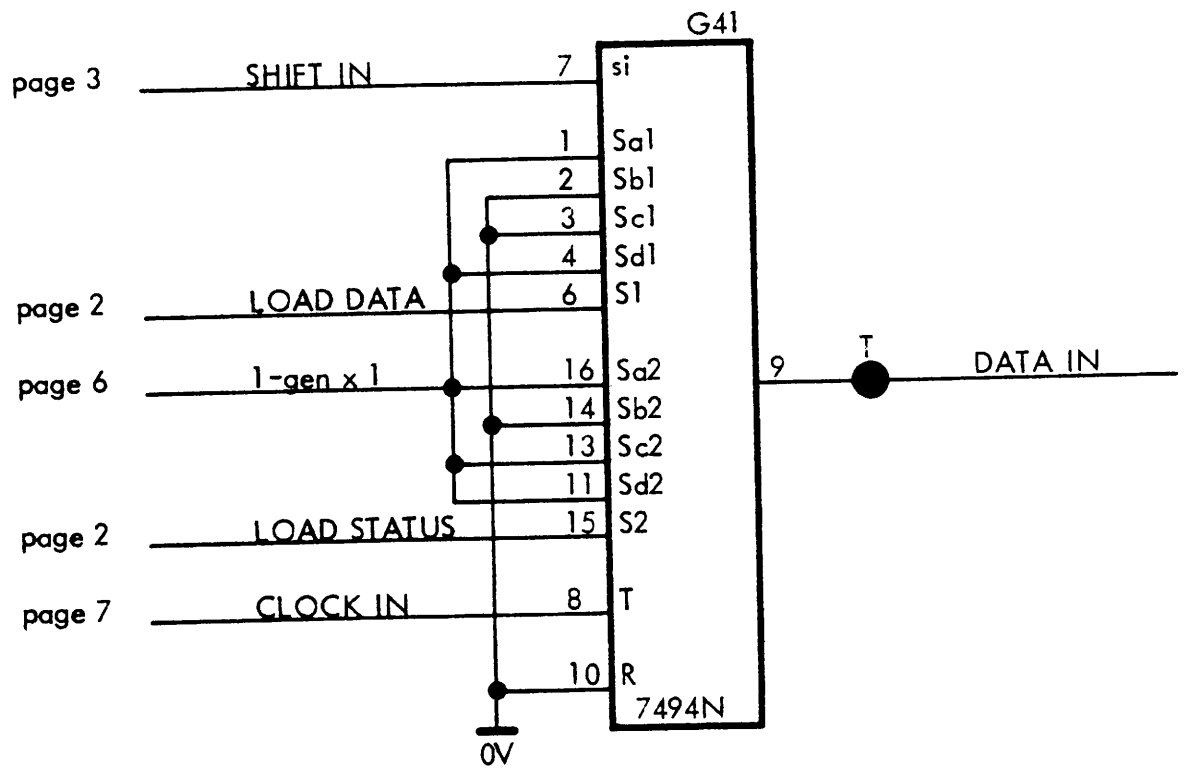


A22090

Circuit Diagram


Pos 5
RC 3232 - 1
p 5 of 8
101 5

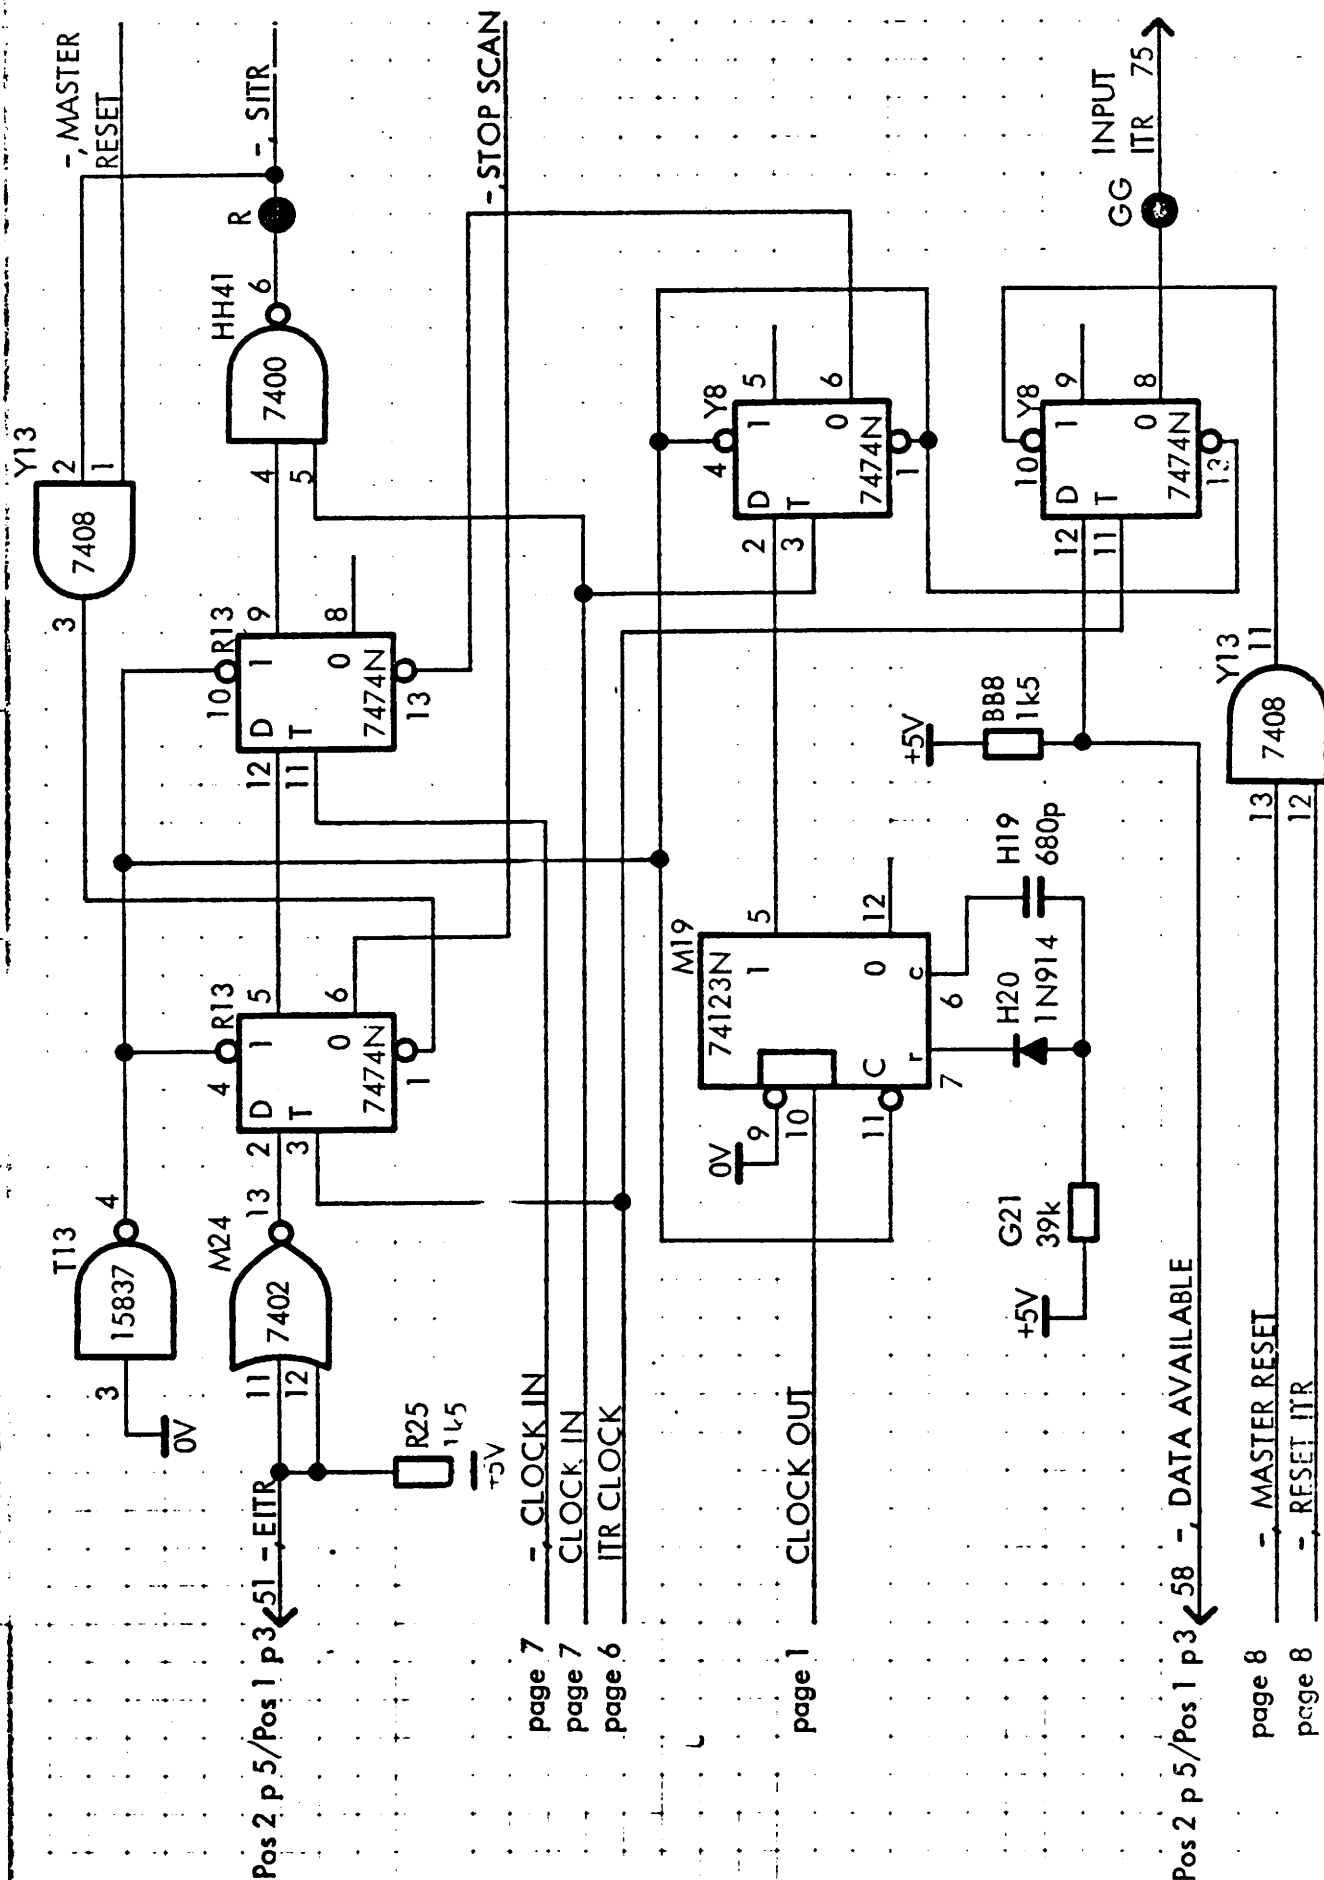

721217 KNEH 730723 IGH 730821 LLM

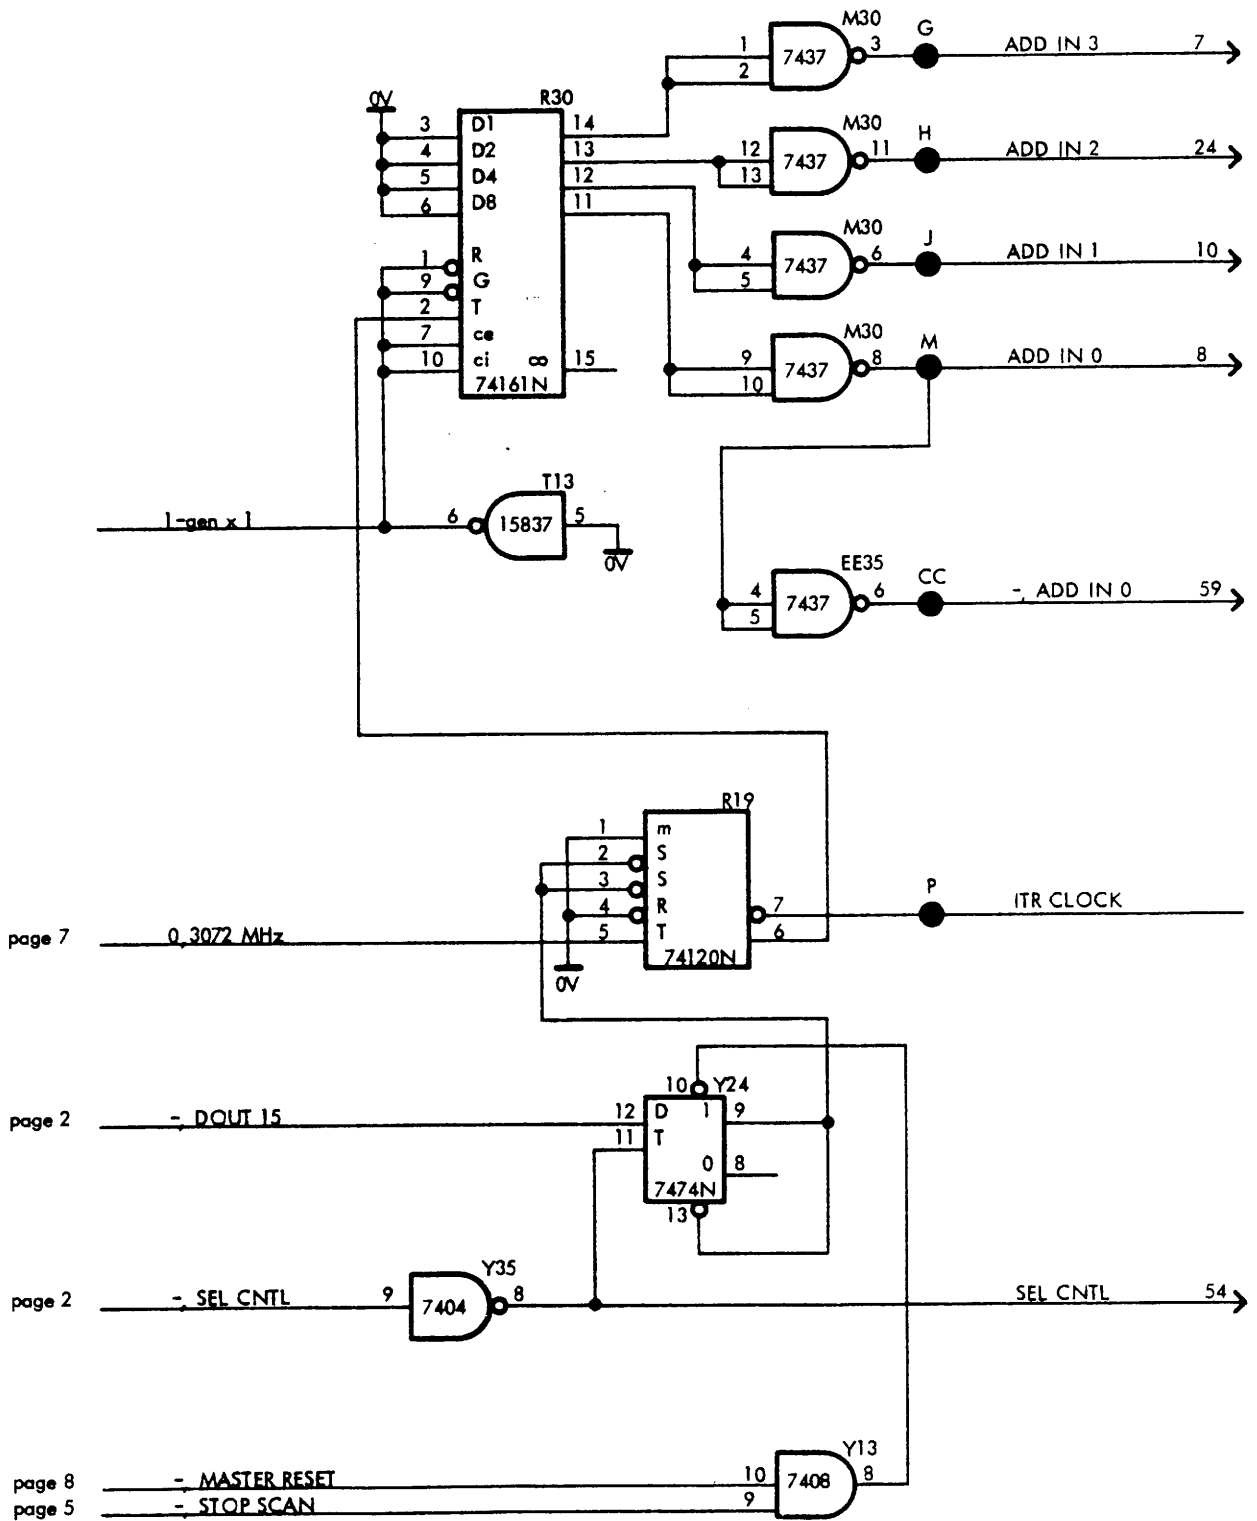


721216 KNEH 730723 IGH 730821 LLM

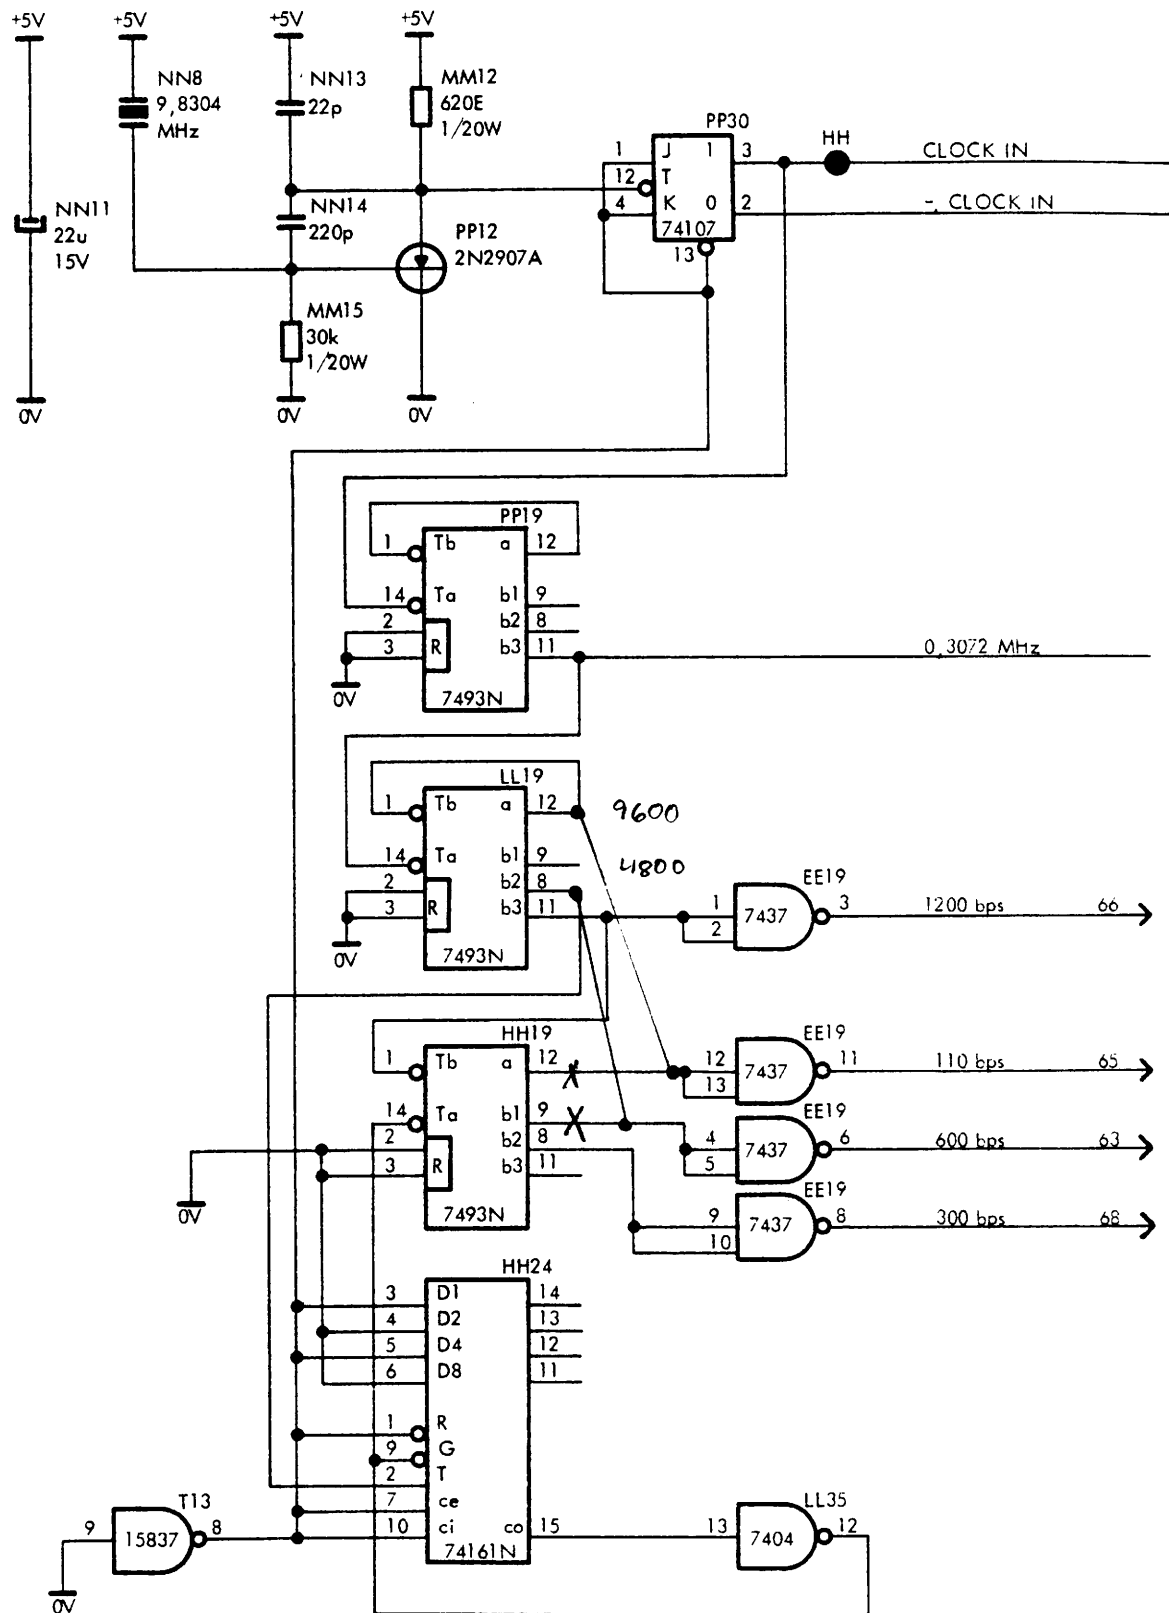

18-019

721218 KNEH 730723 IGH 730821 LLM

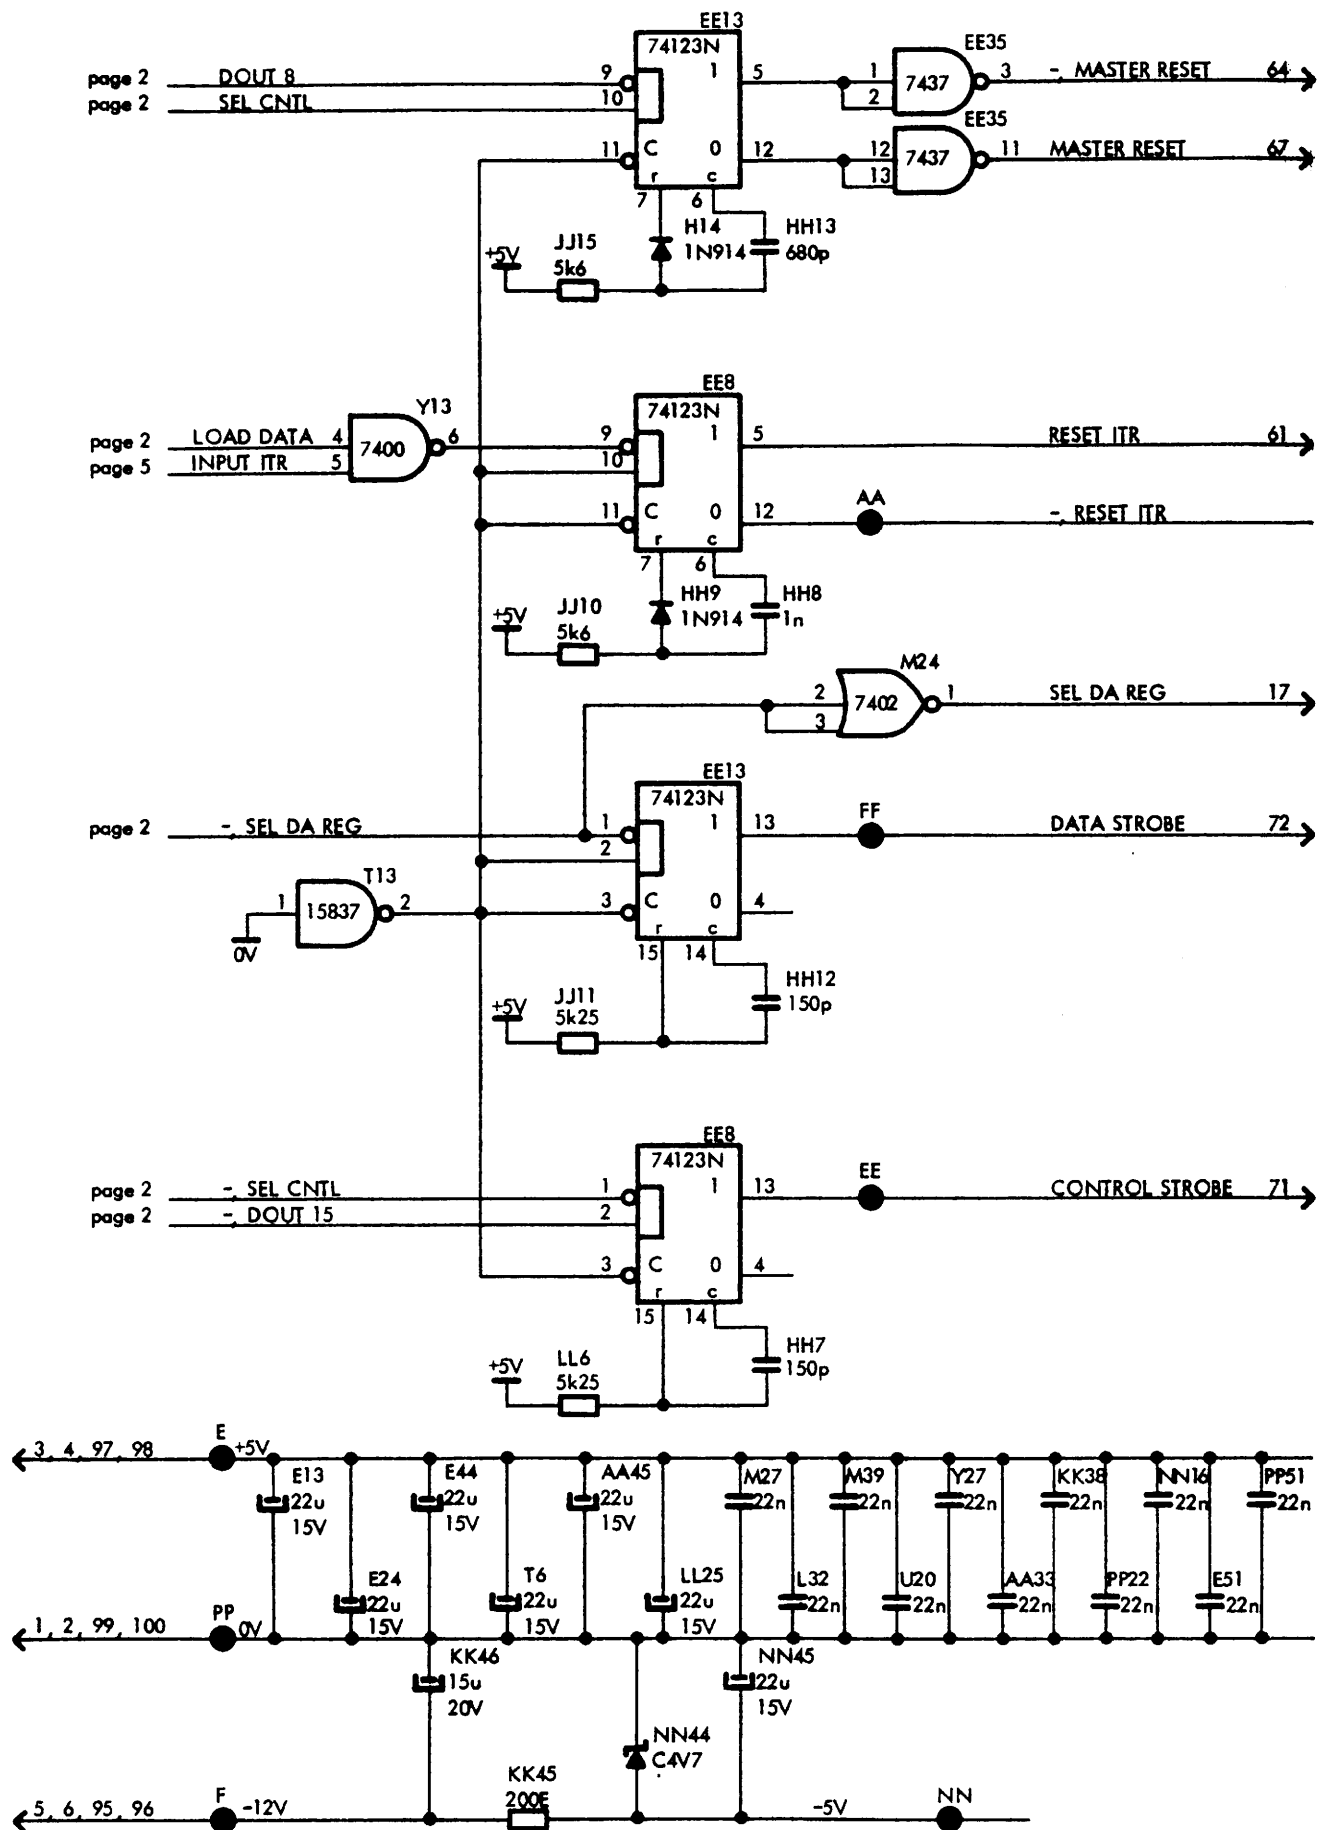




LAM 108/116



A13058


STROBE GENERATOR


Circuit Diagram


Pos 5
RC 3232 - 1
p 8 of 8
1018

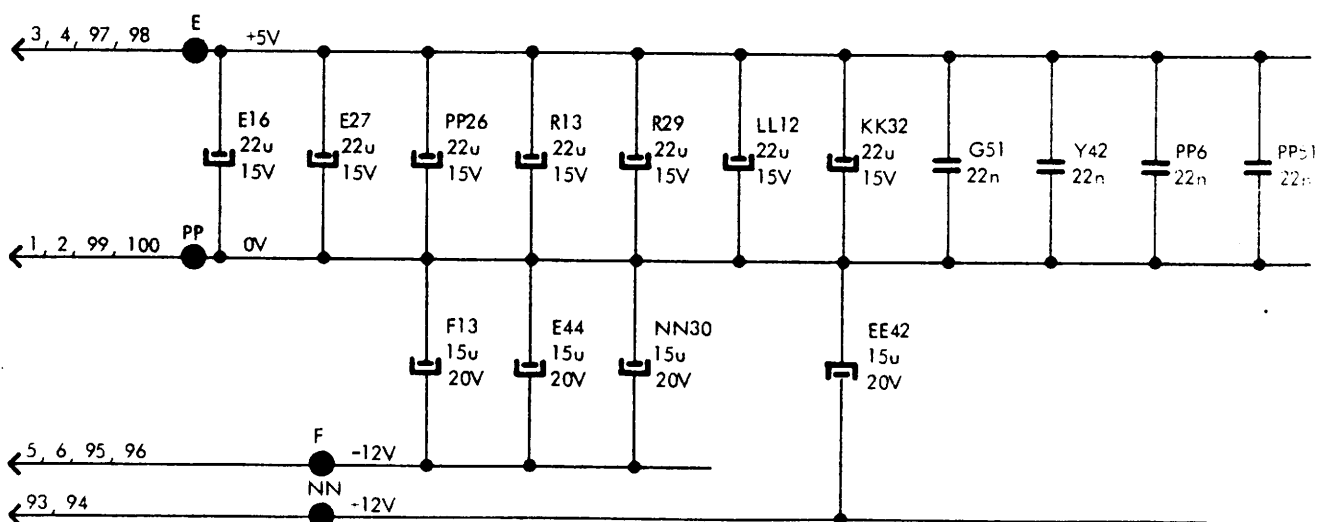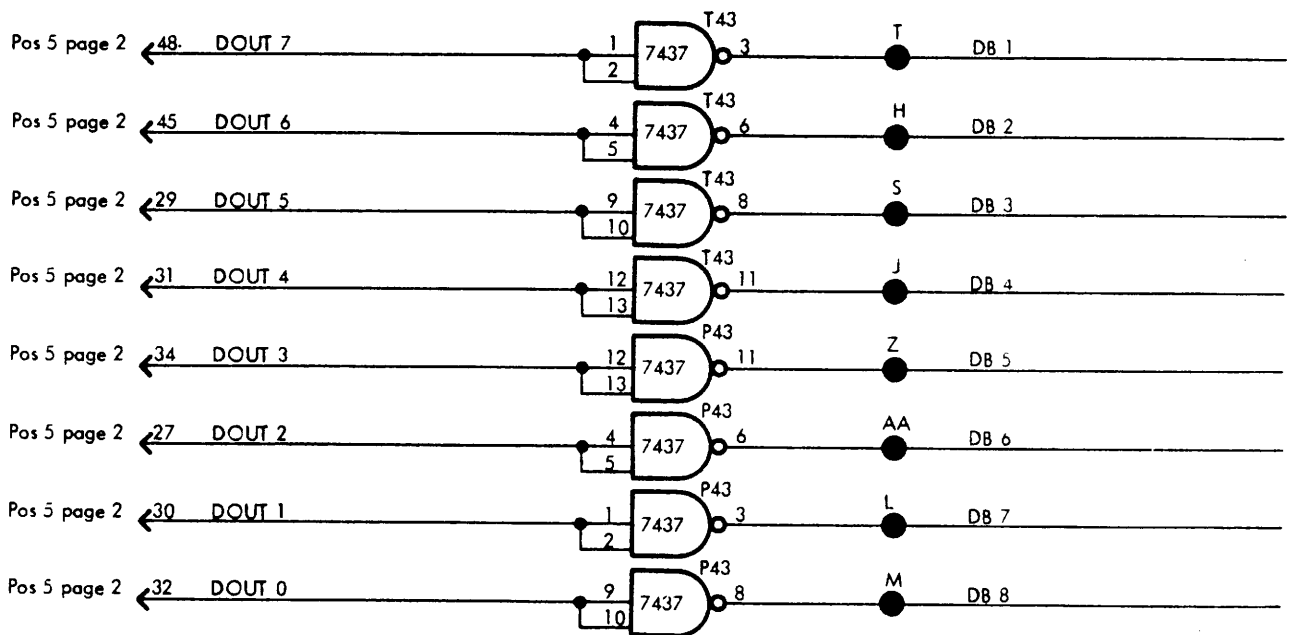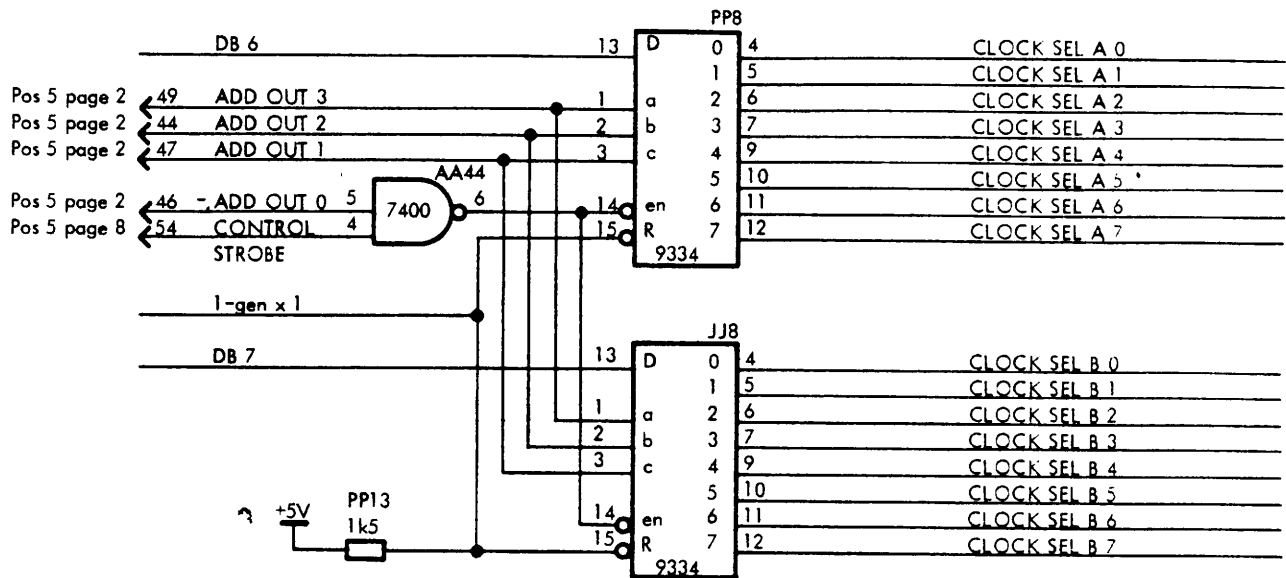


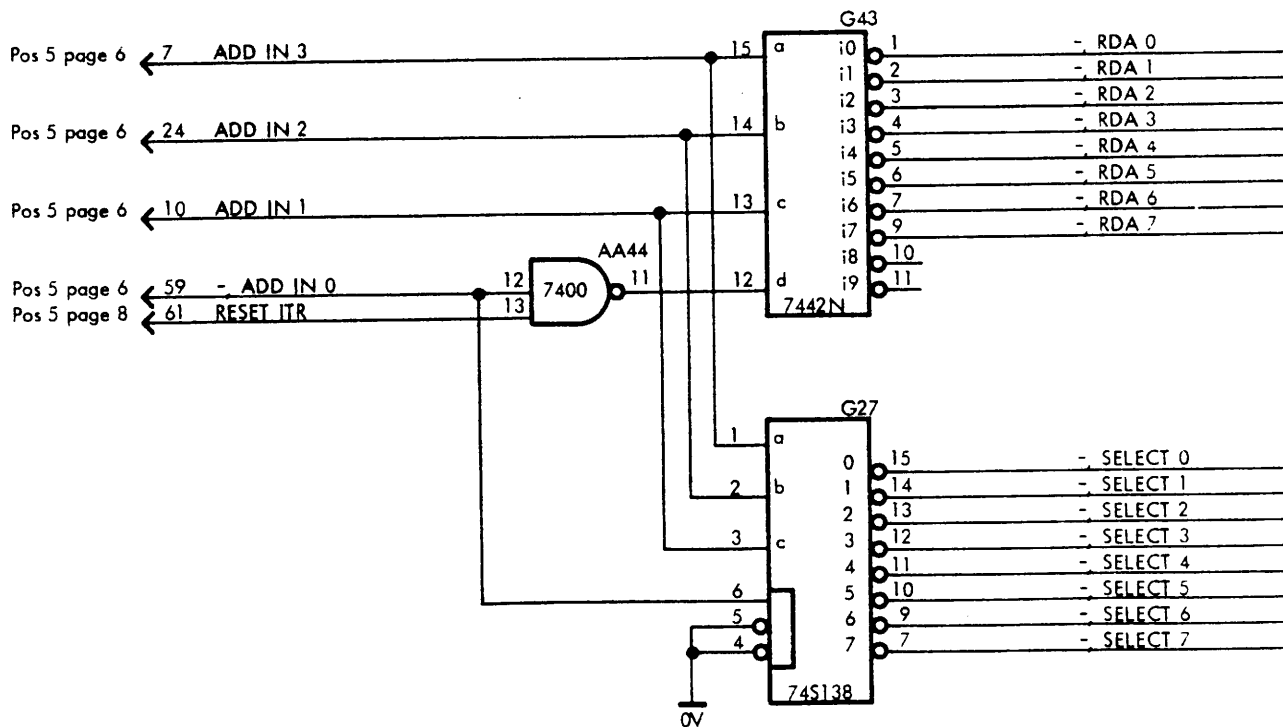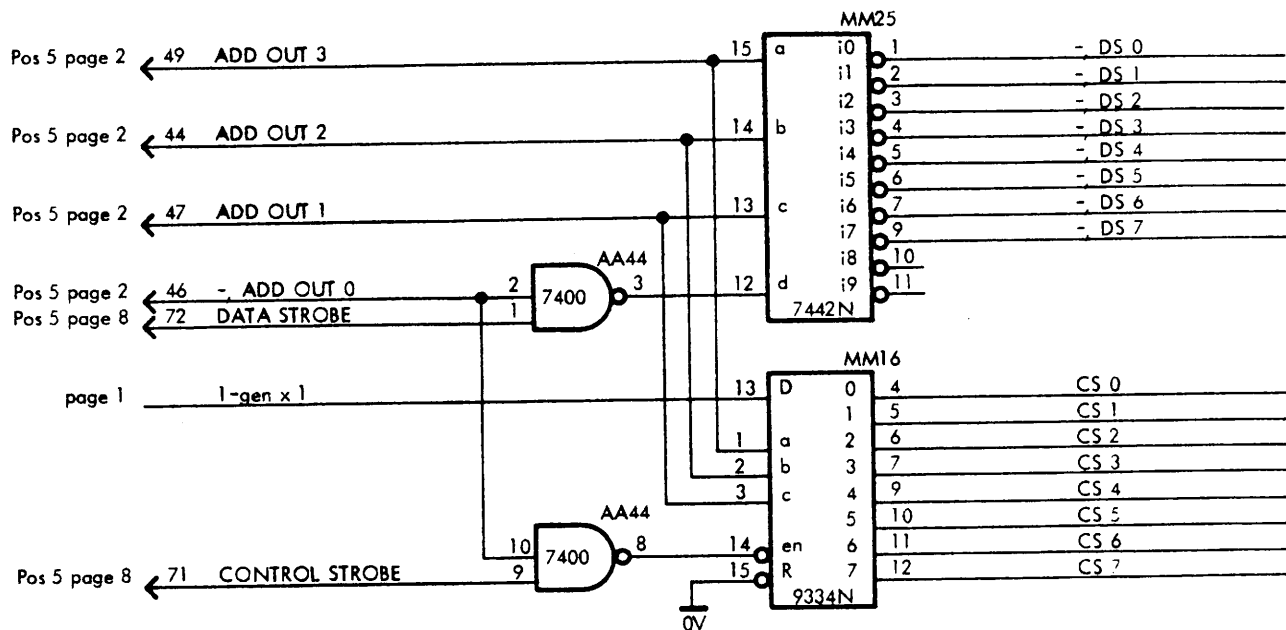


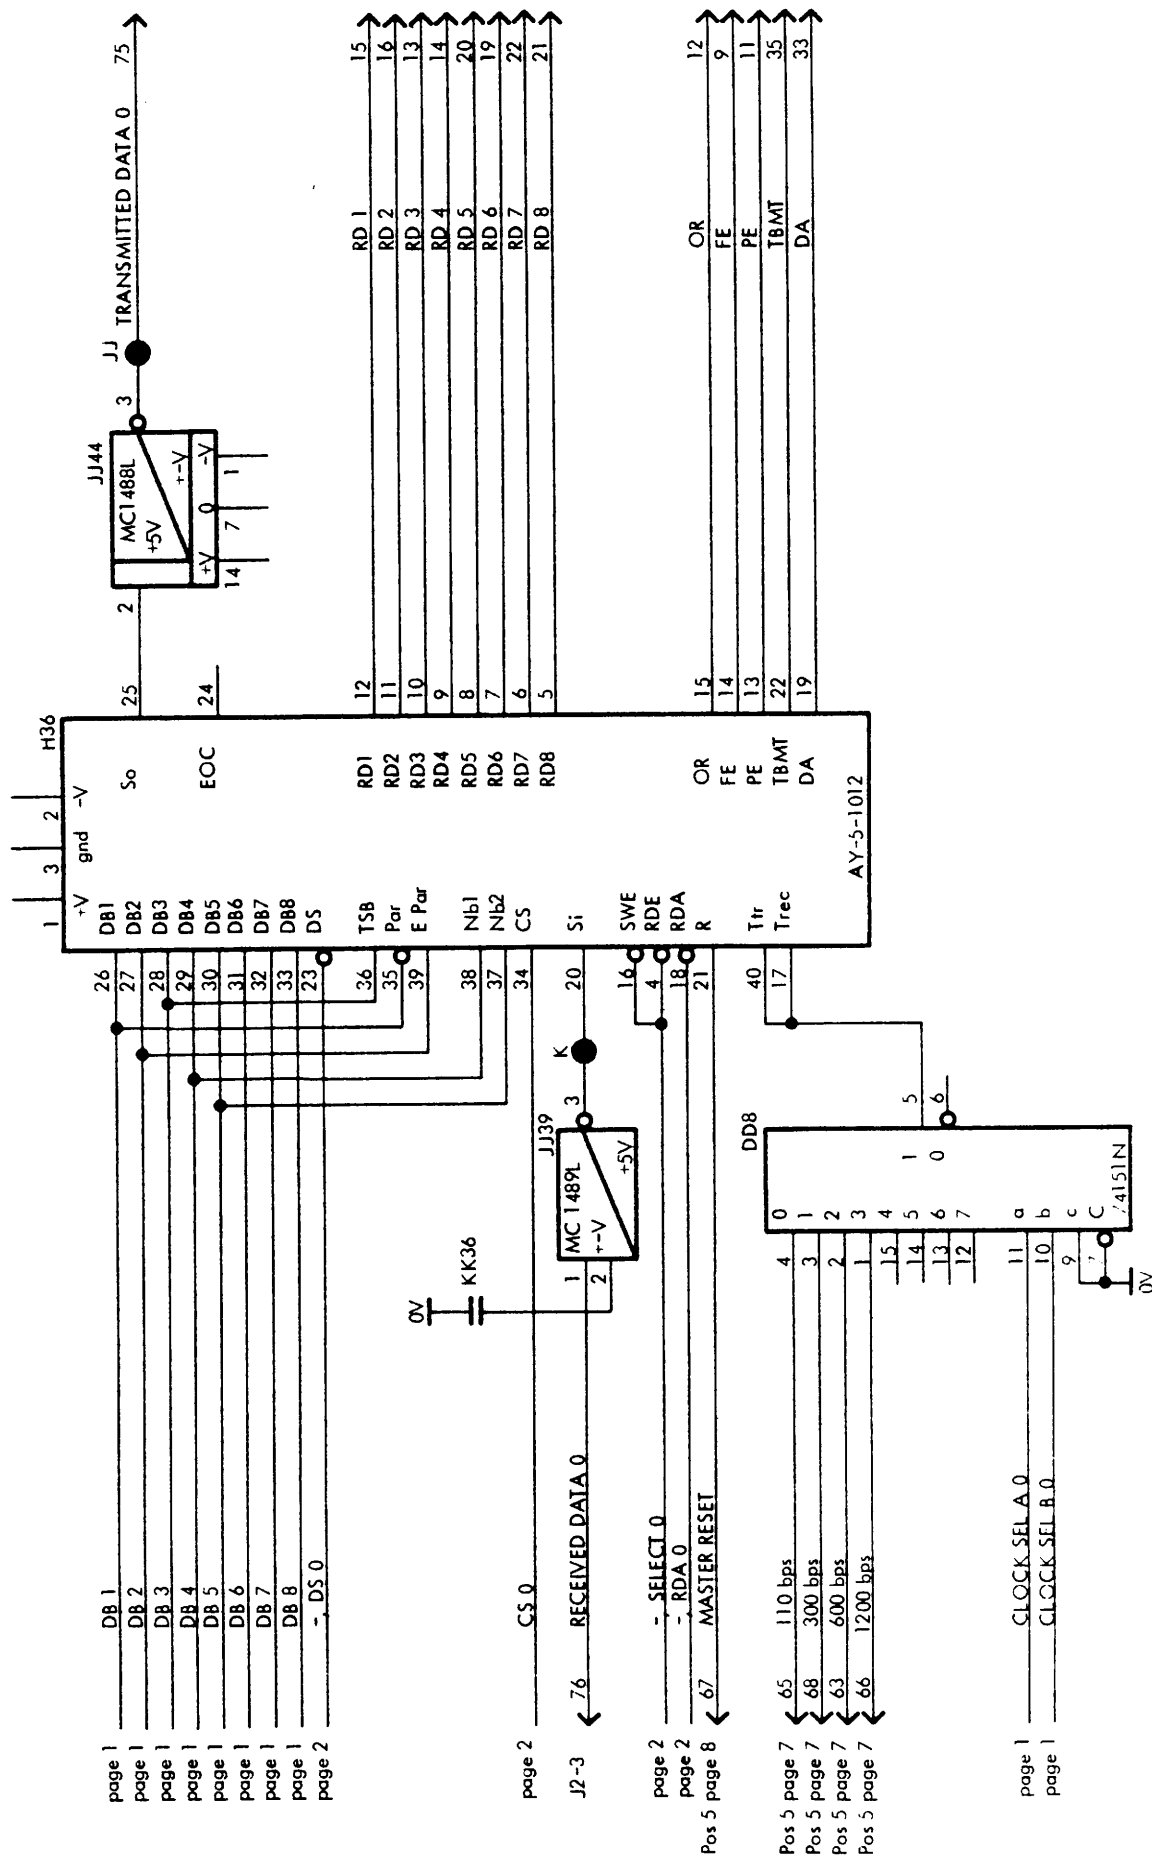


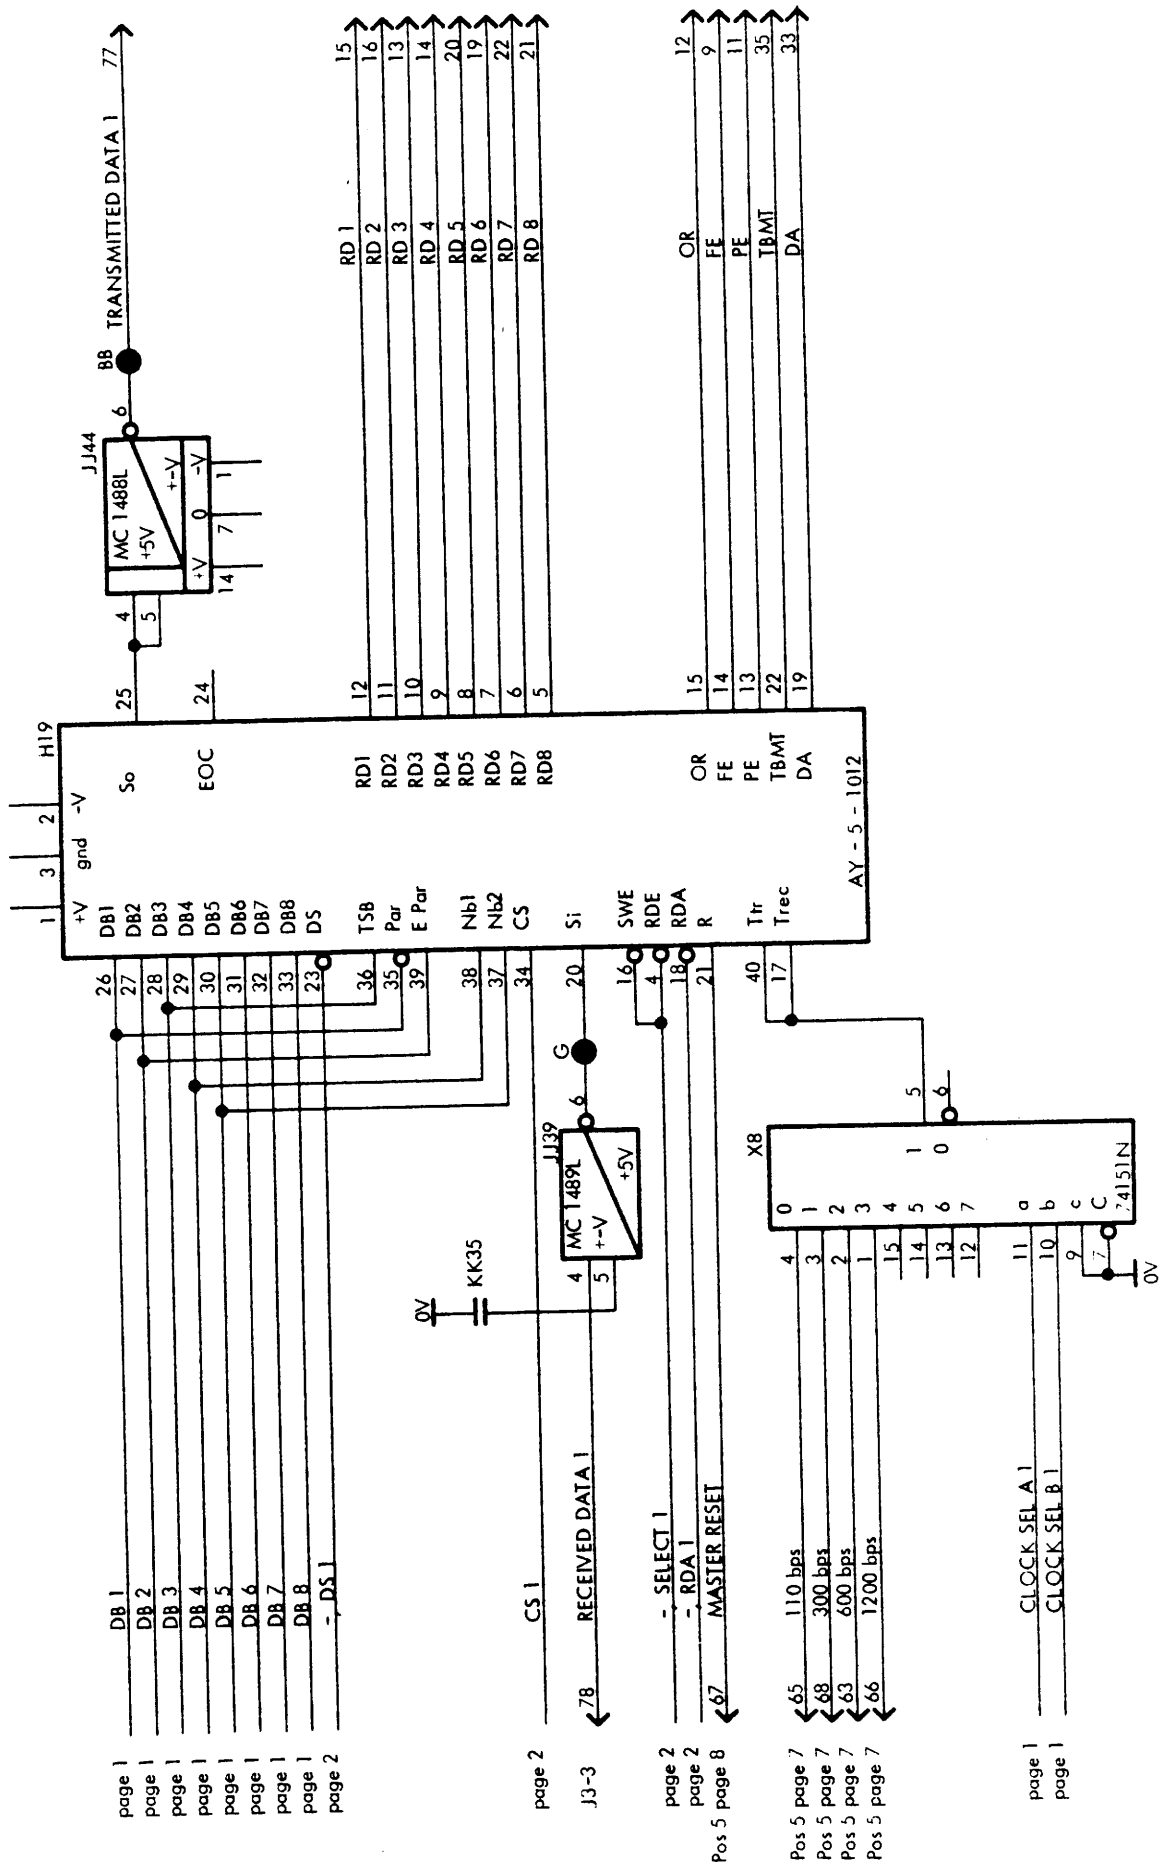


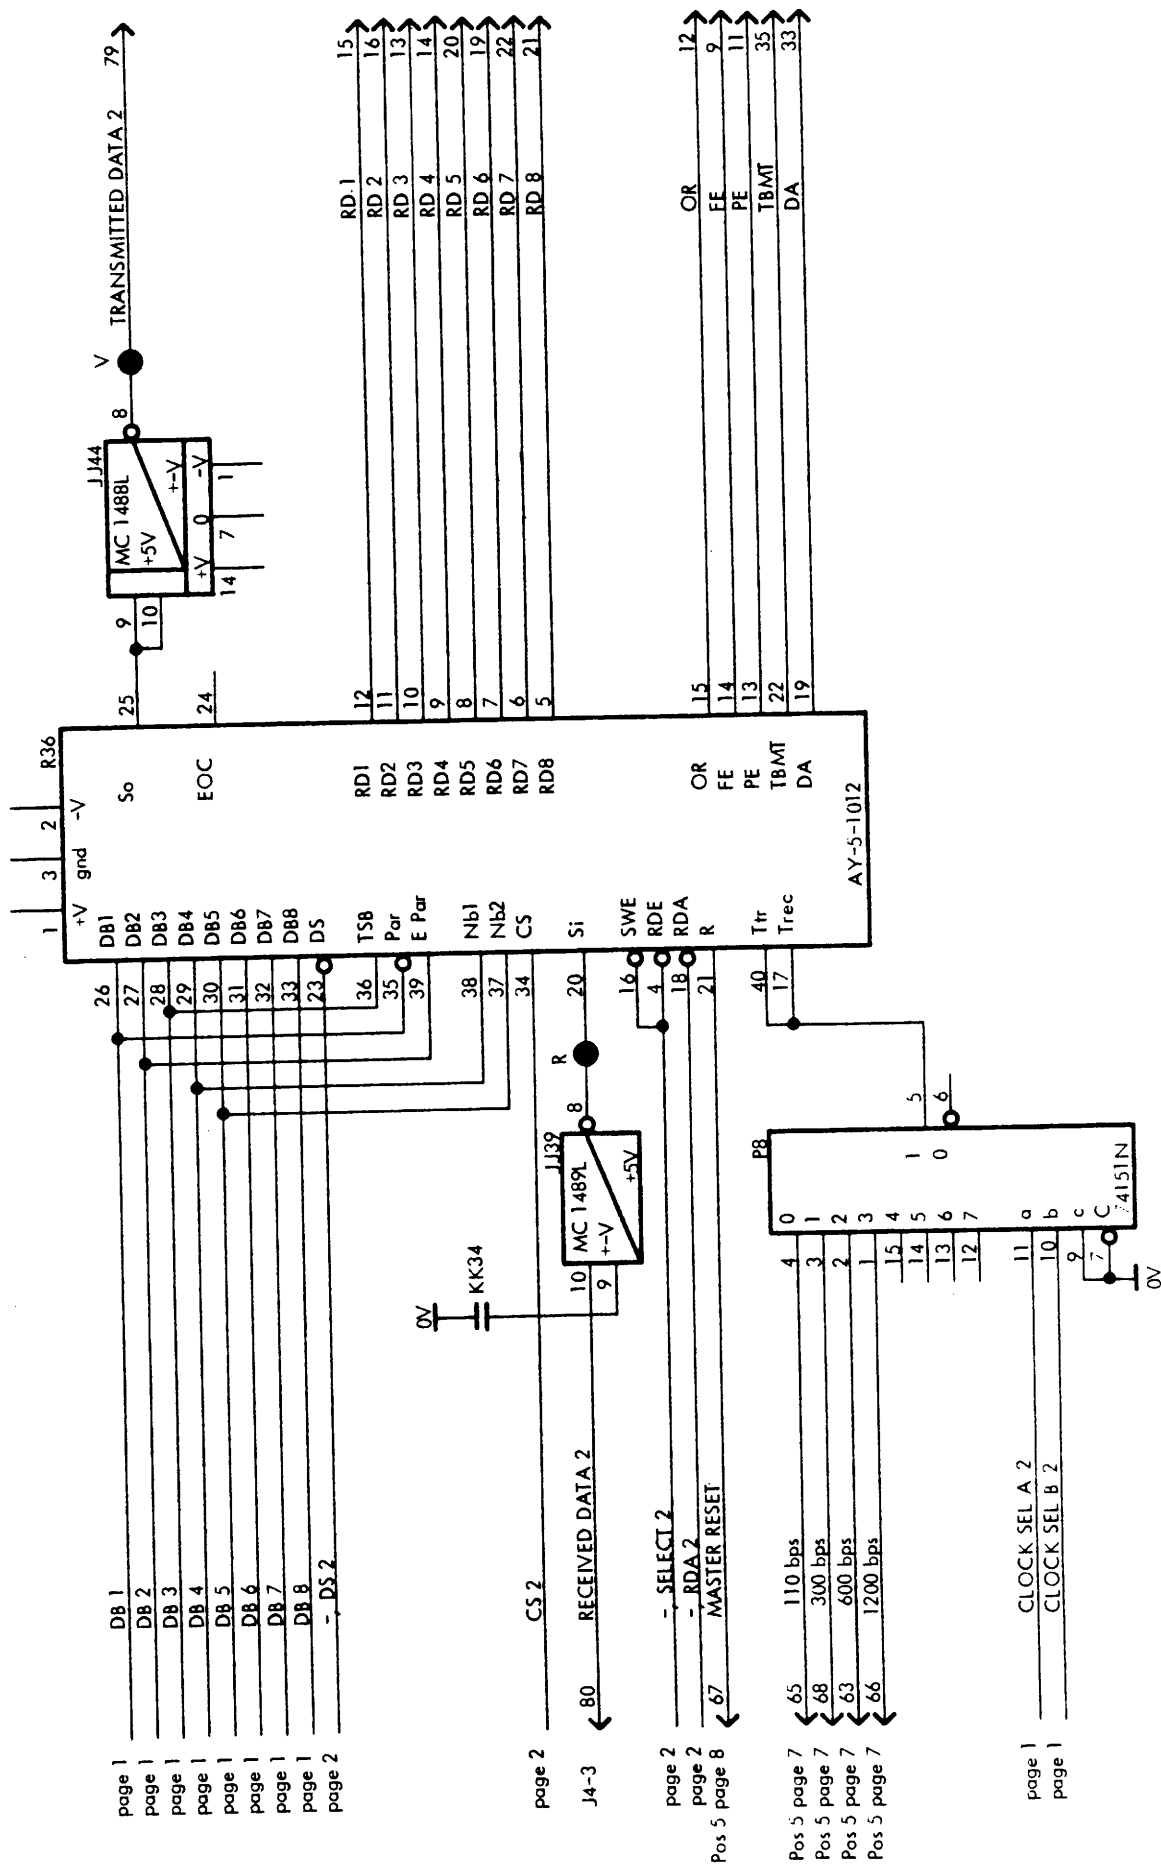




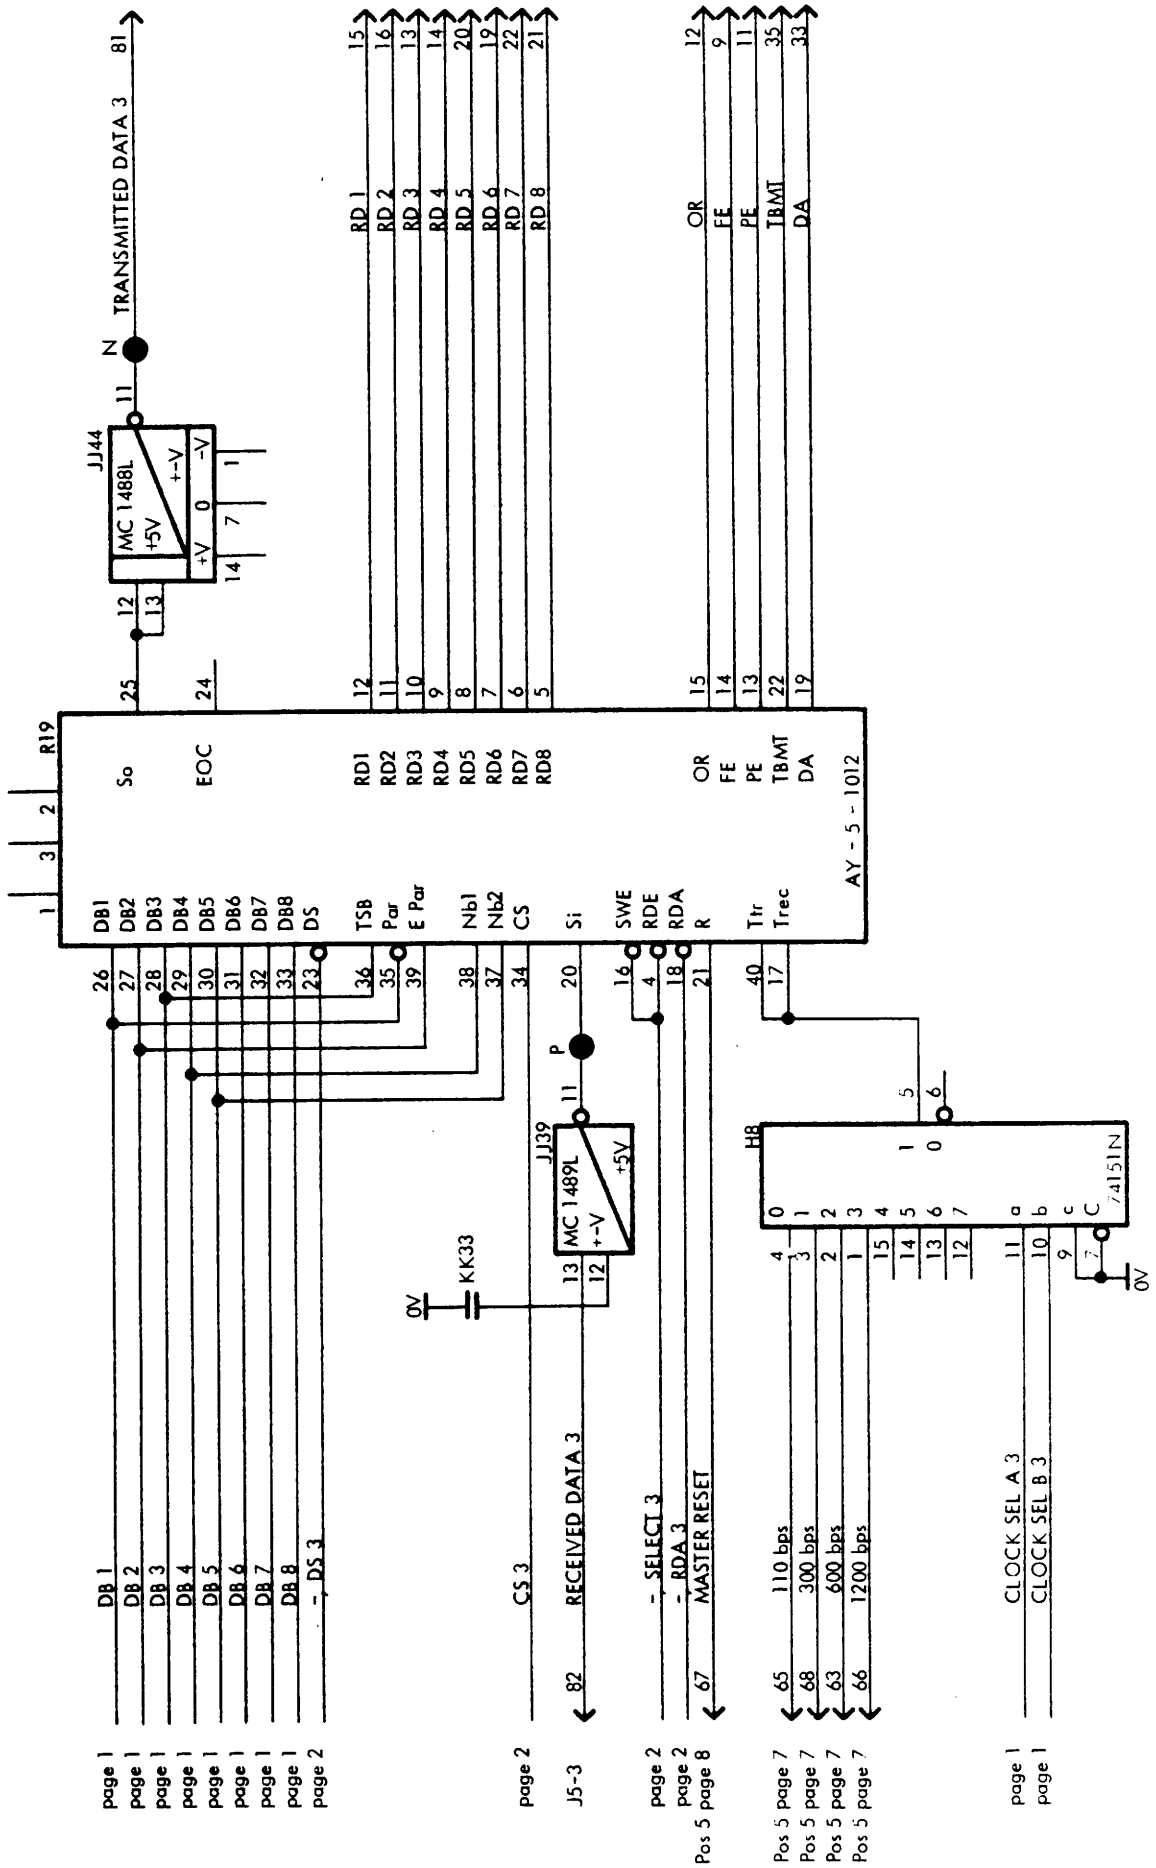


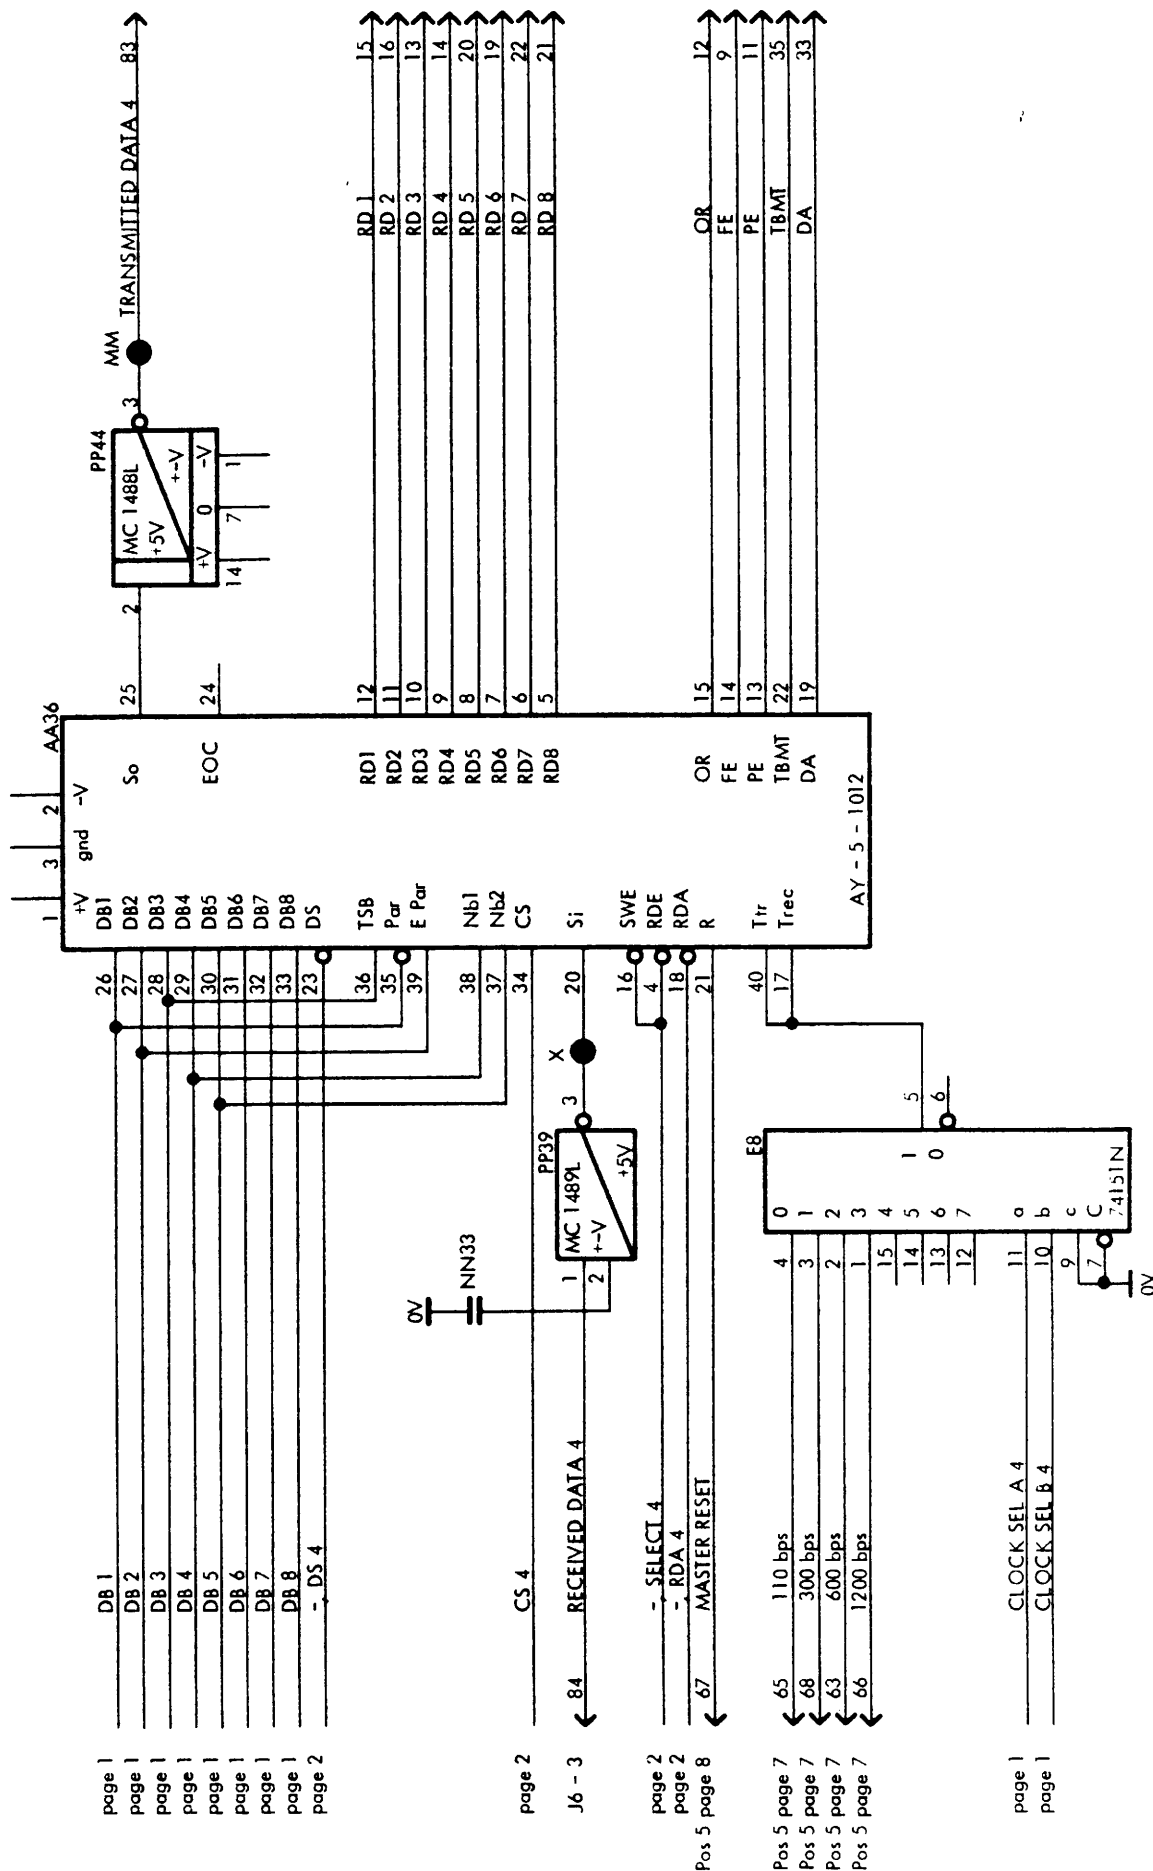


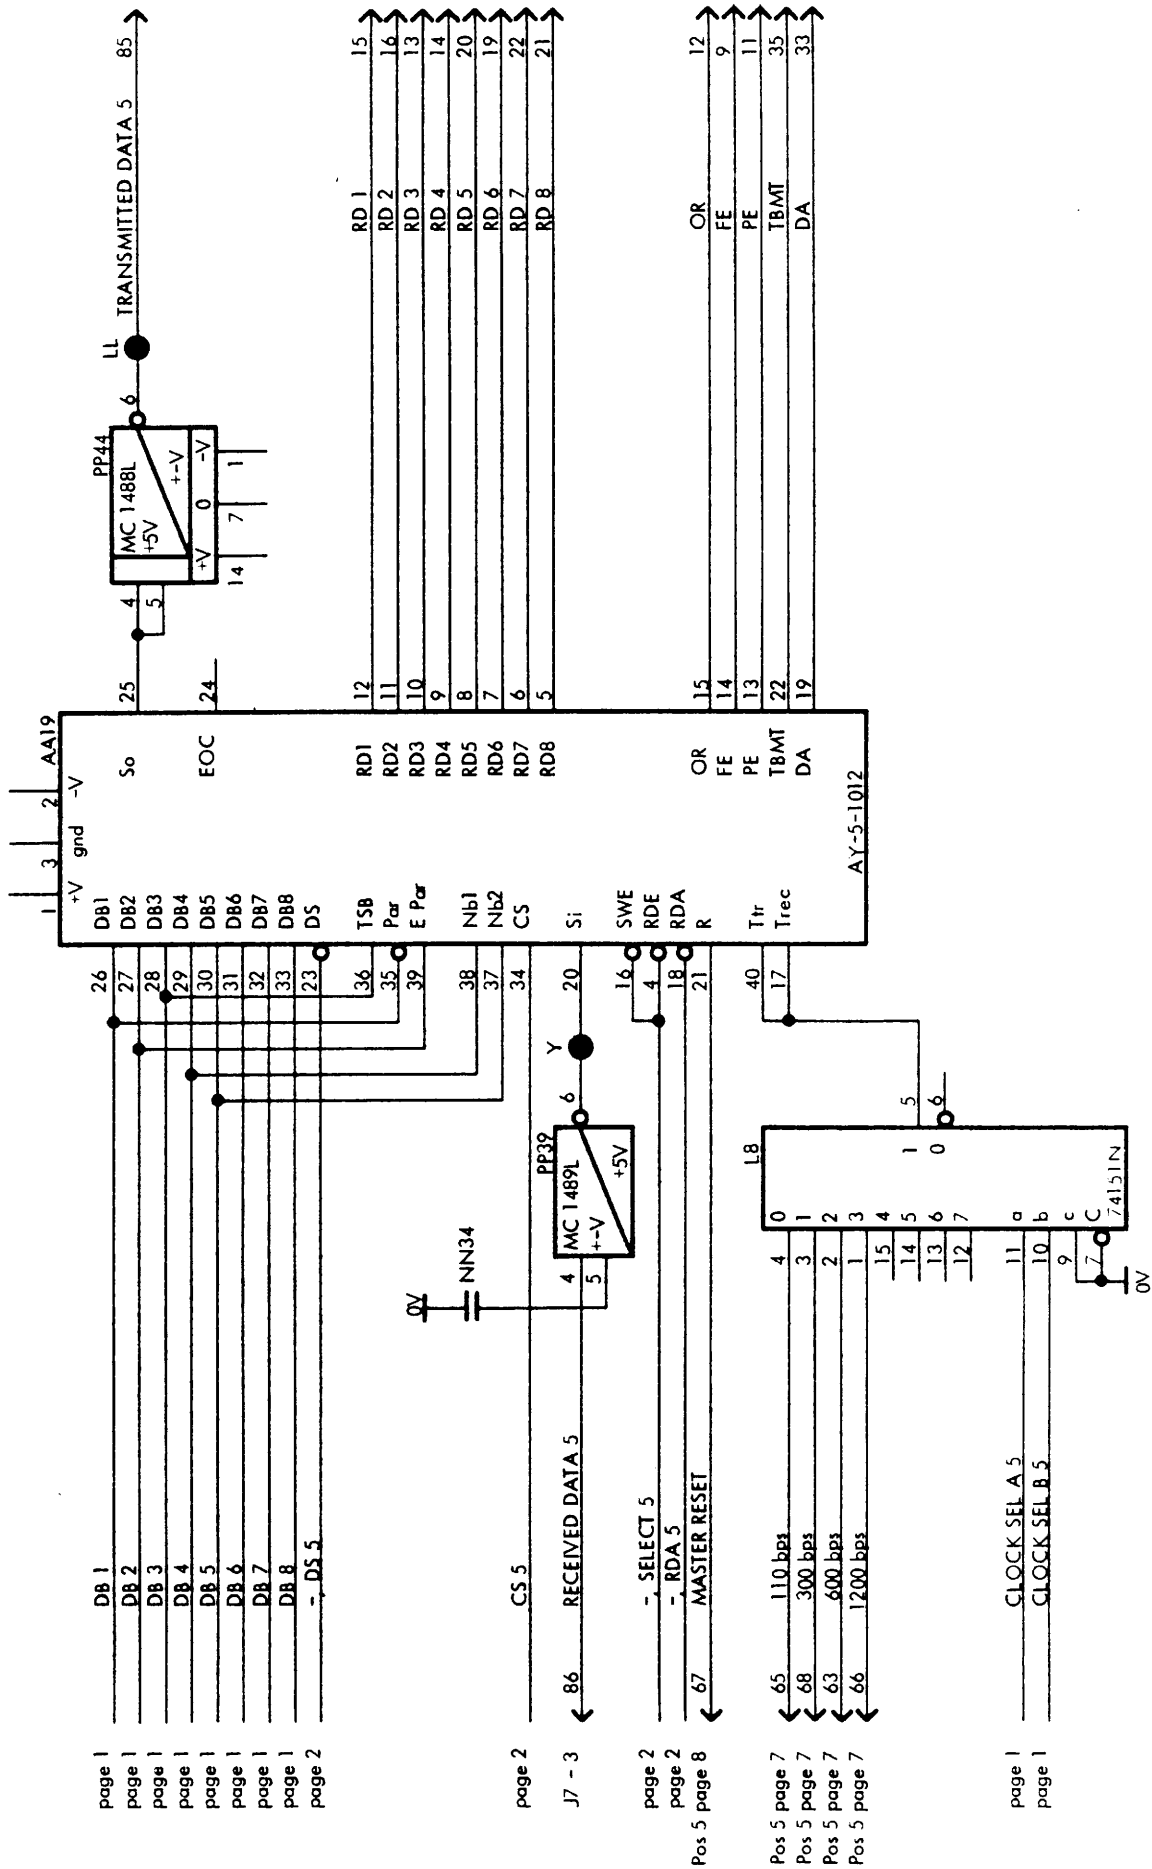


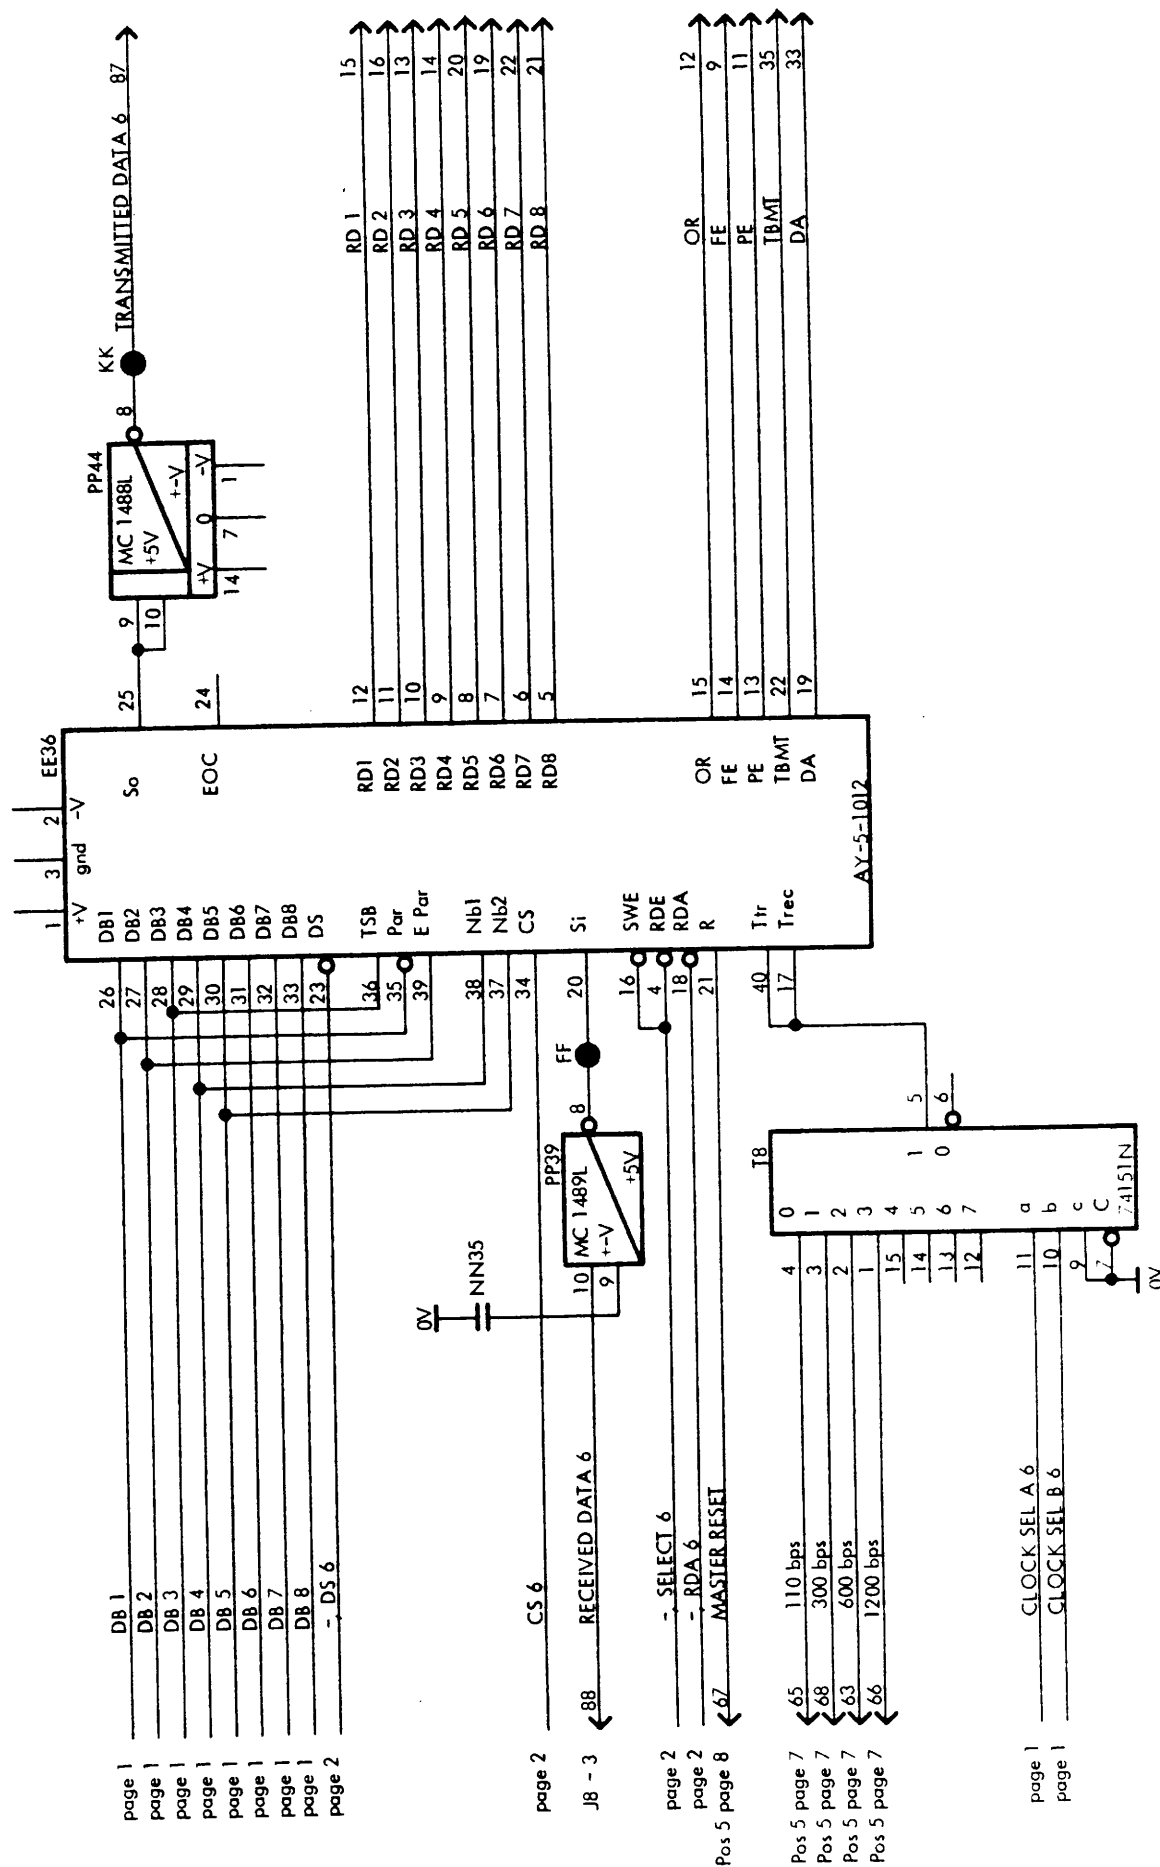


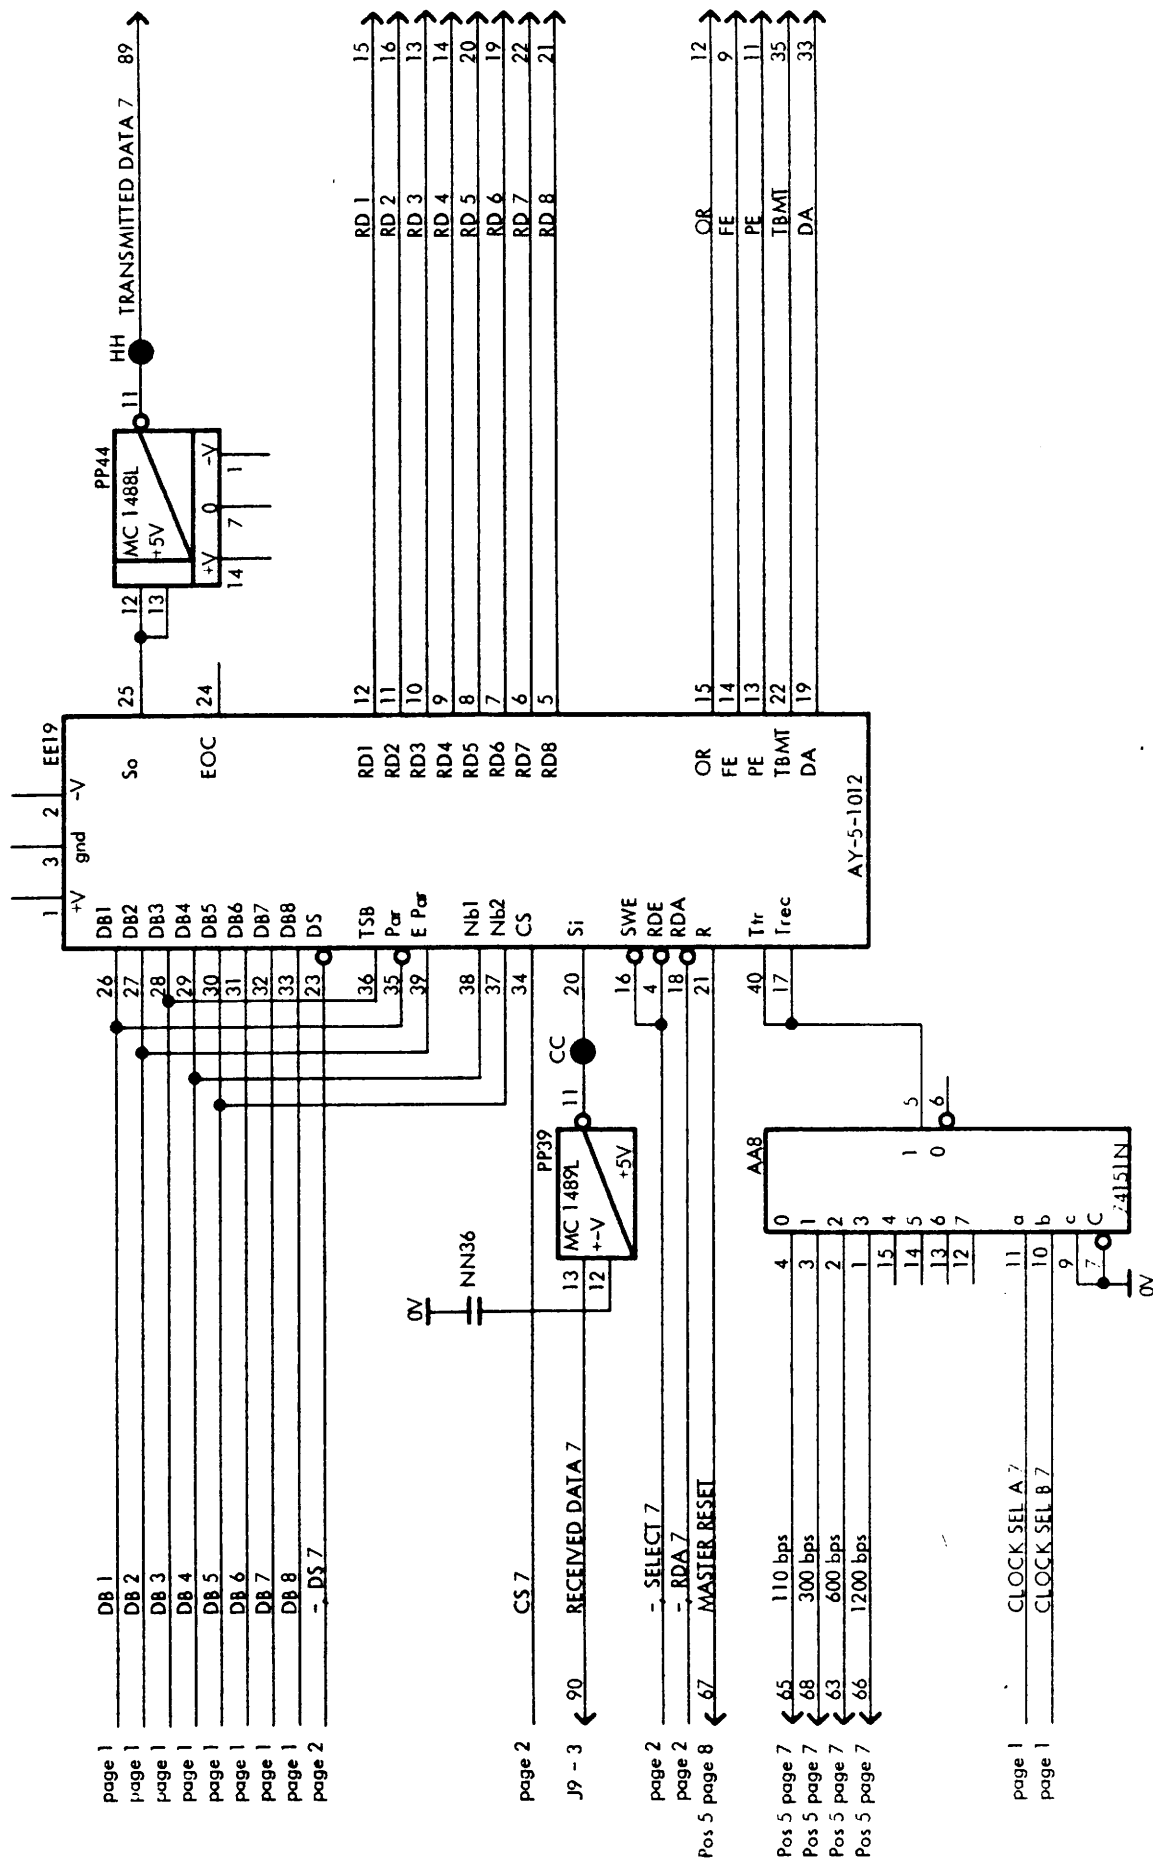


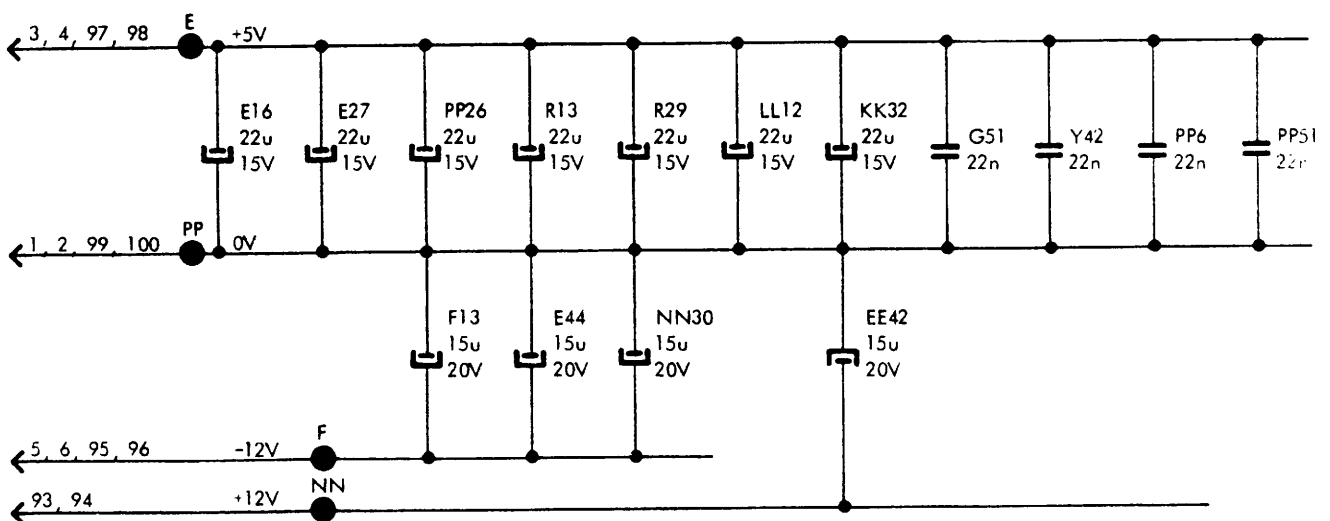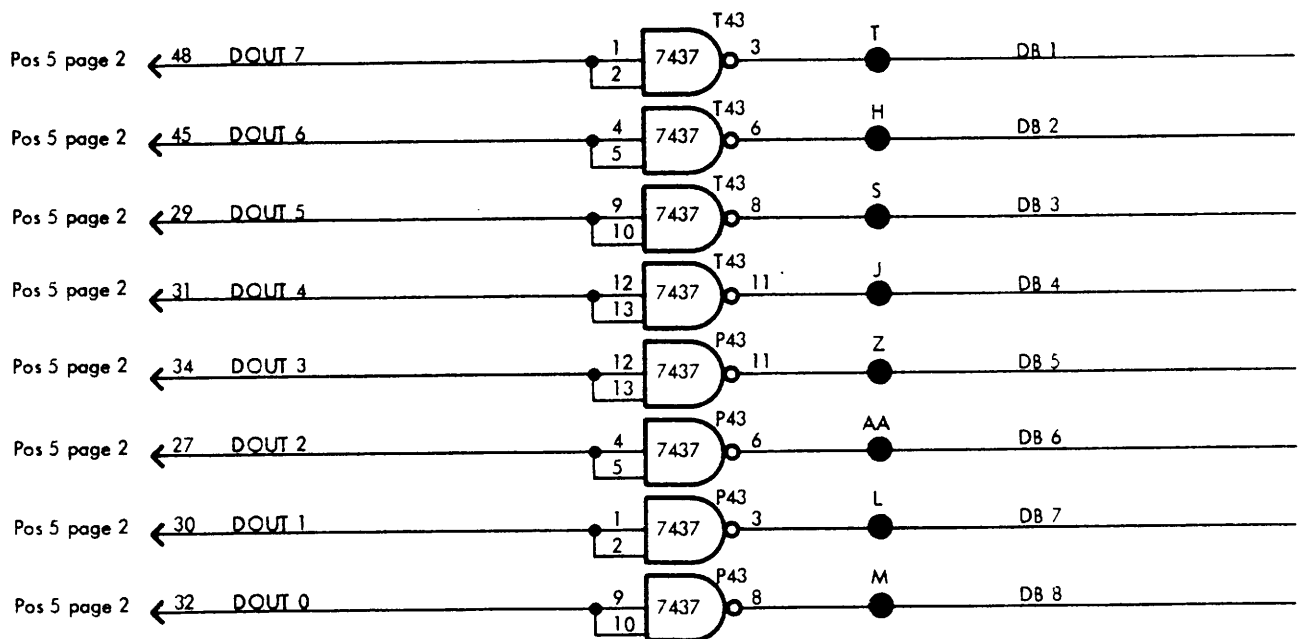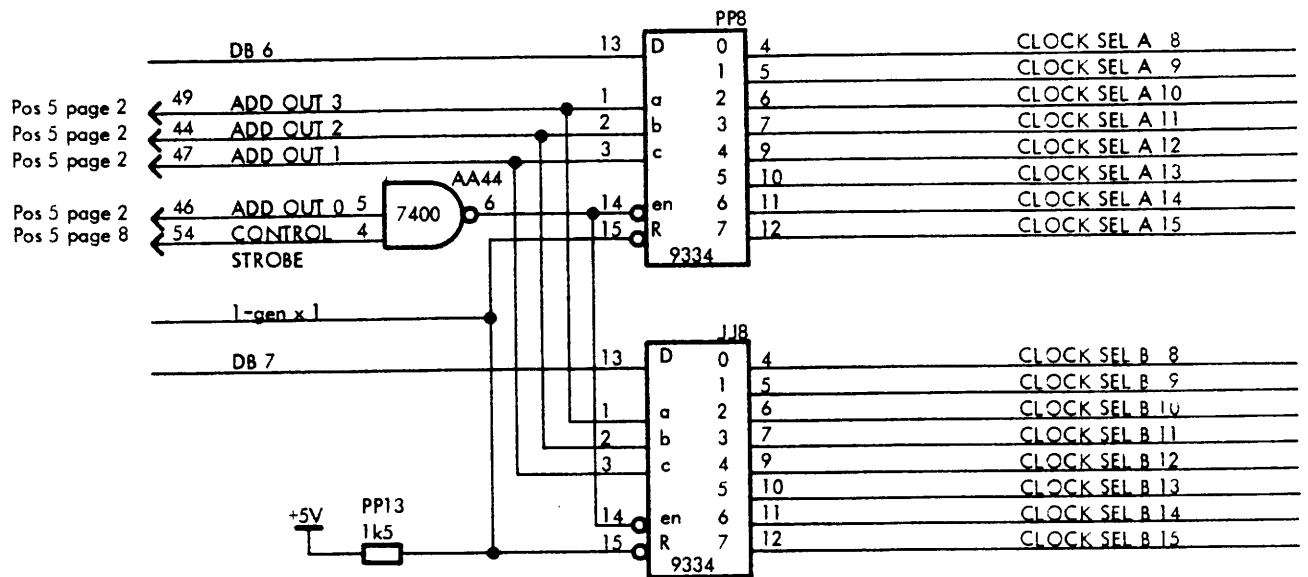



730102 KNEH 730723 IGH 730822 LLM

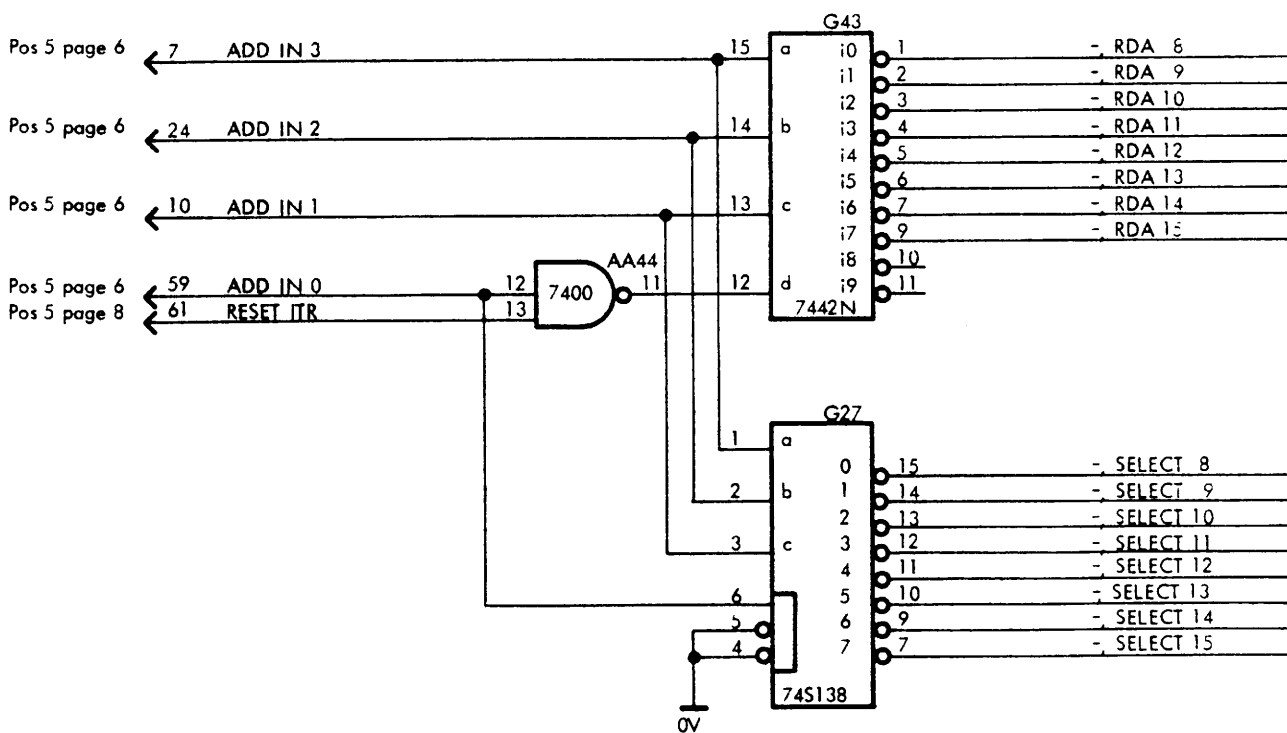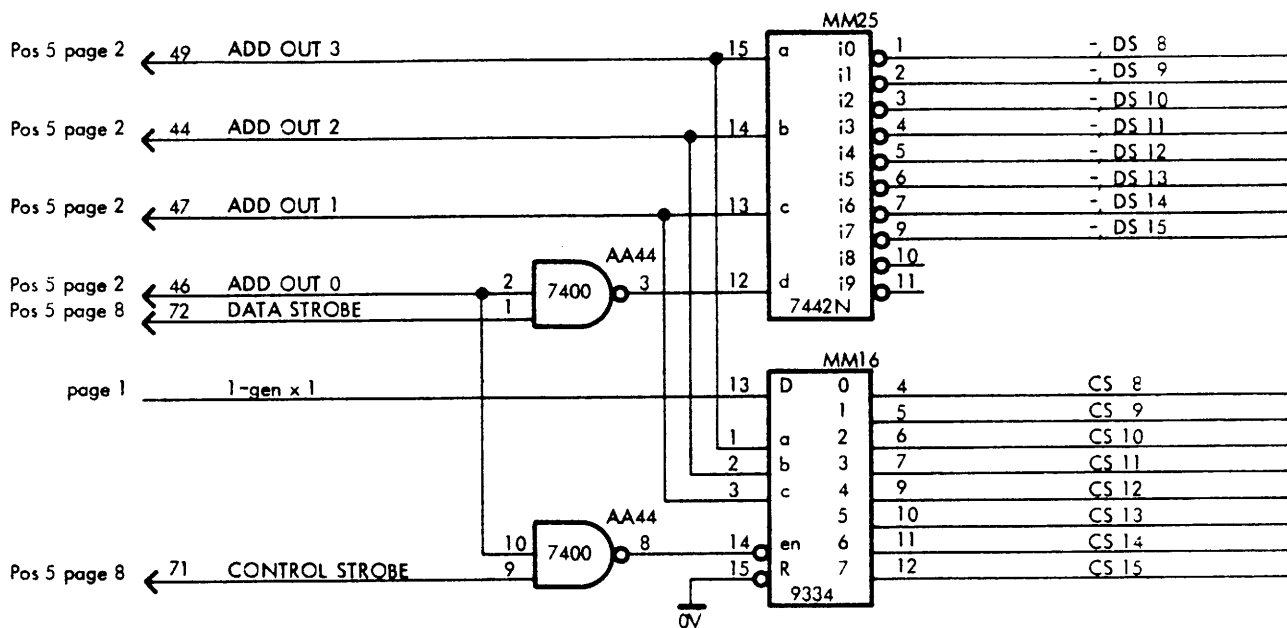


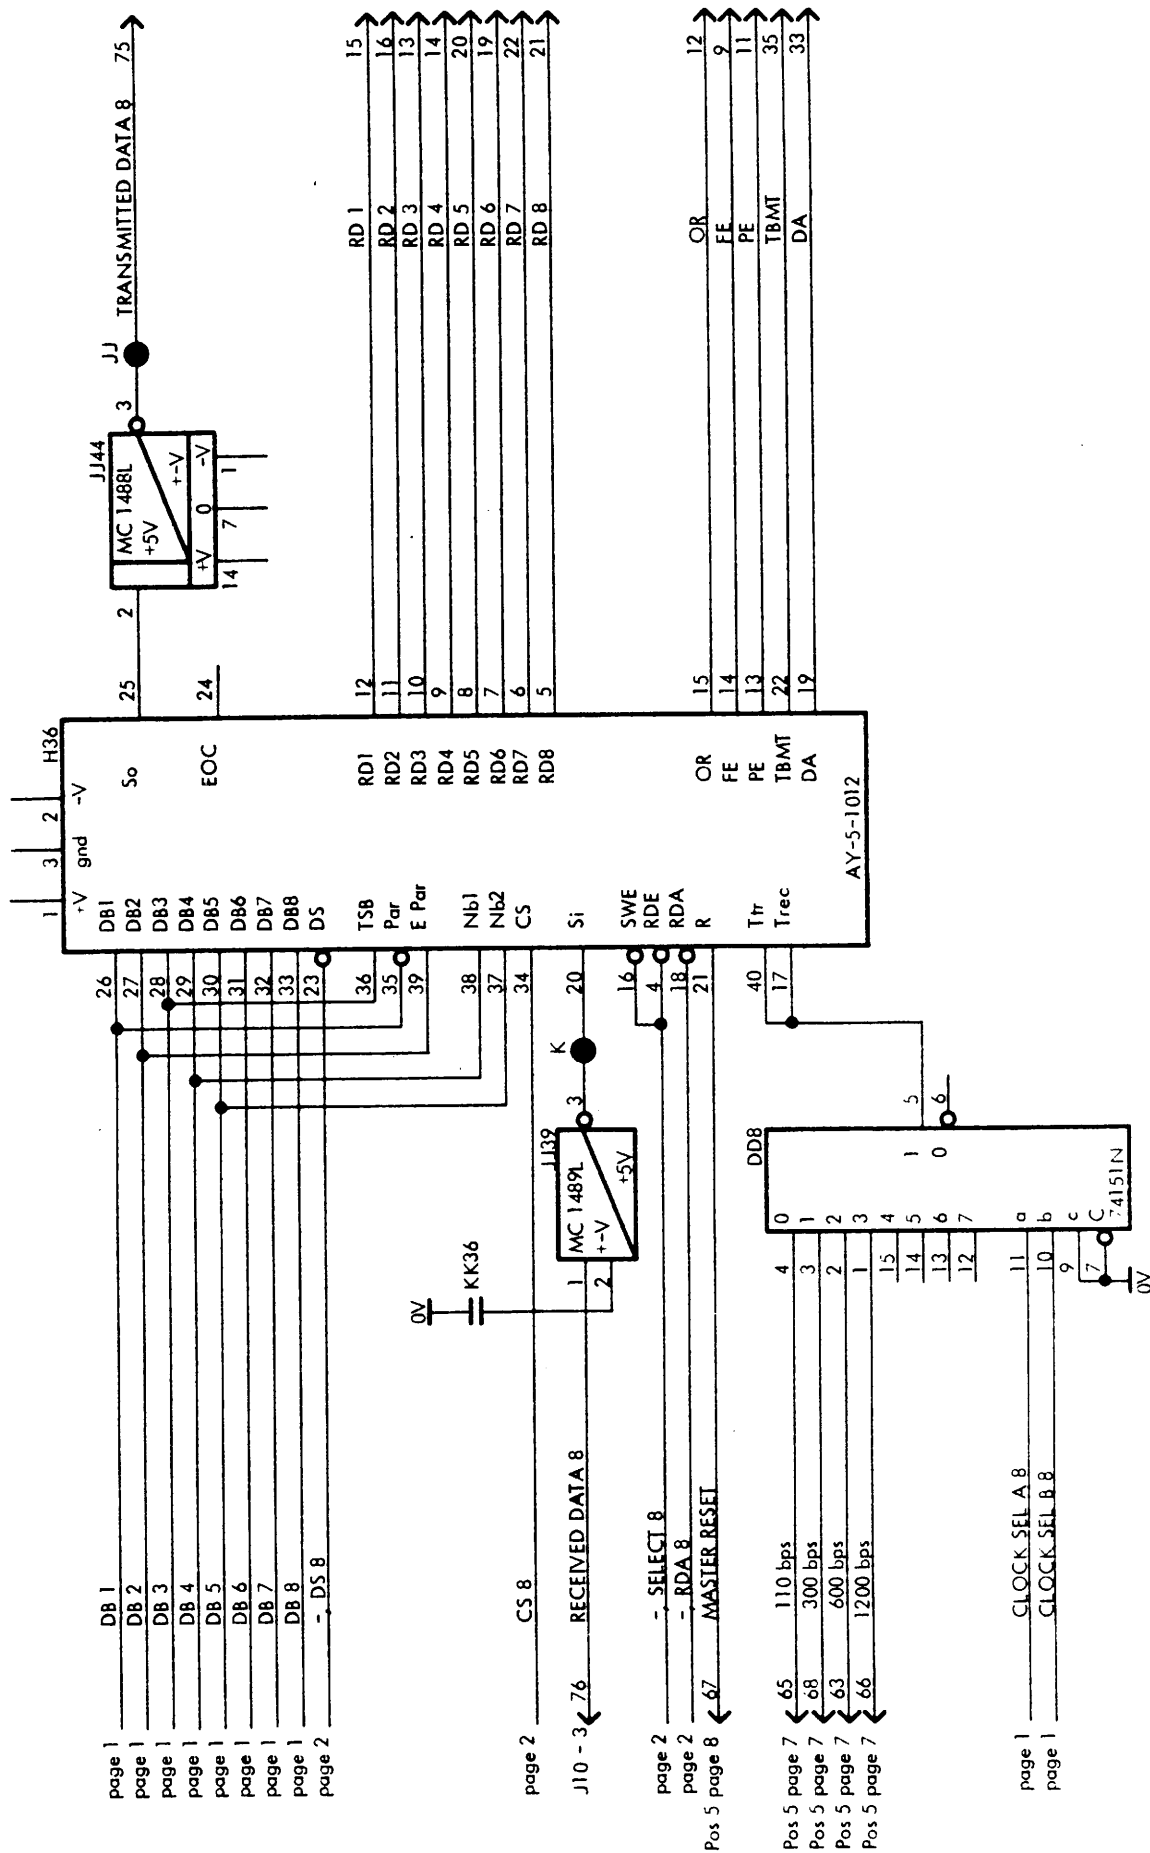


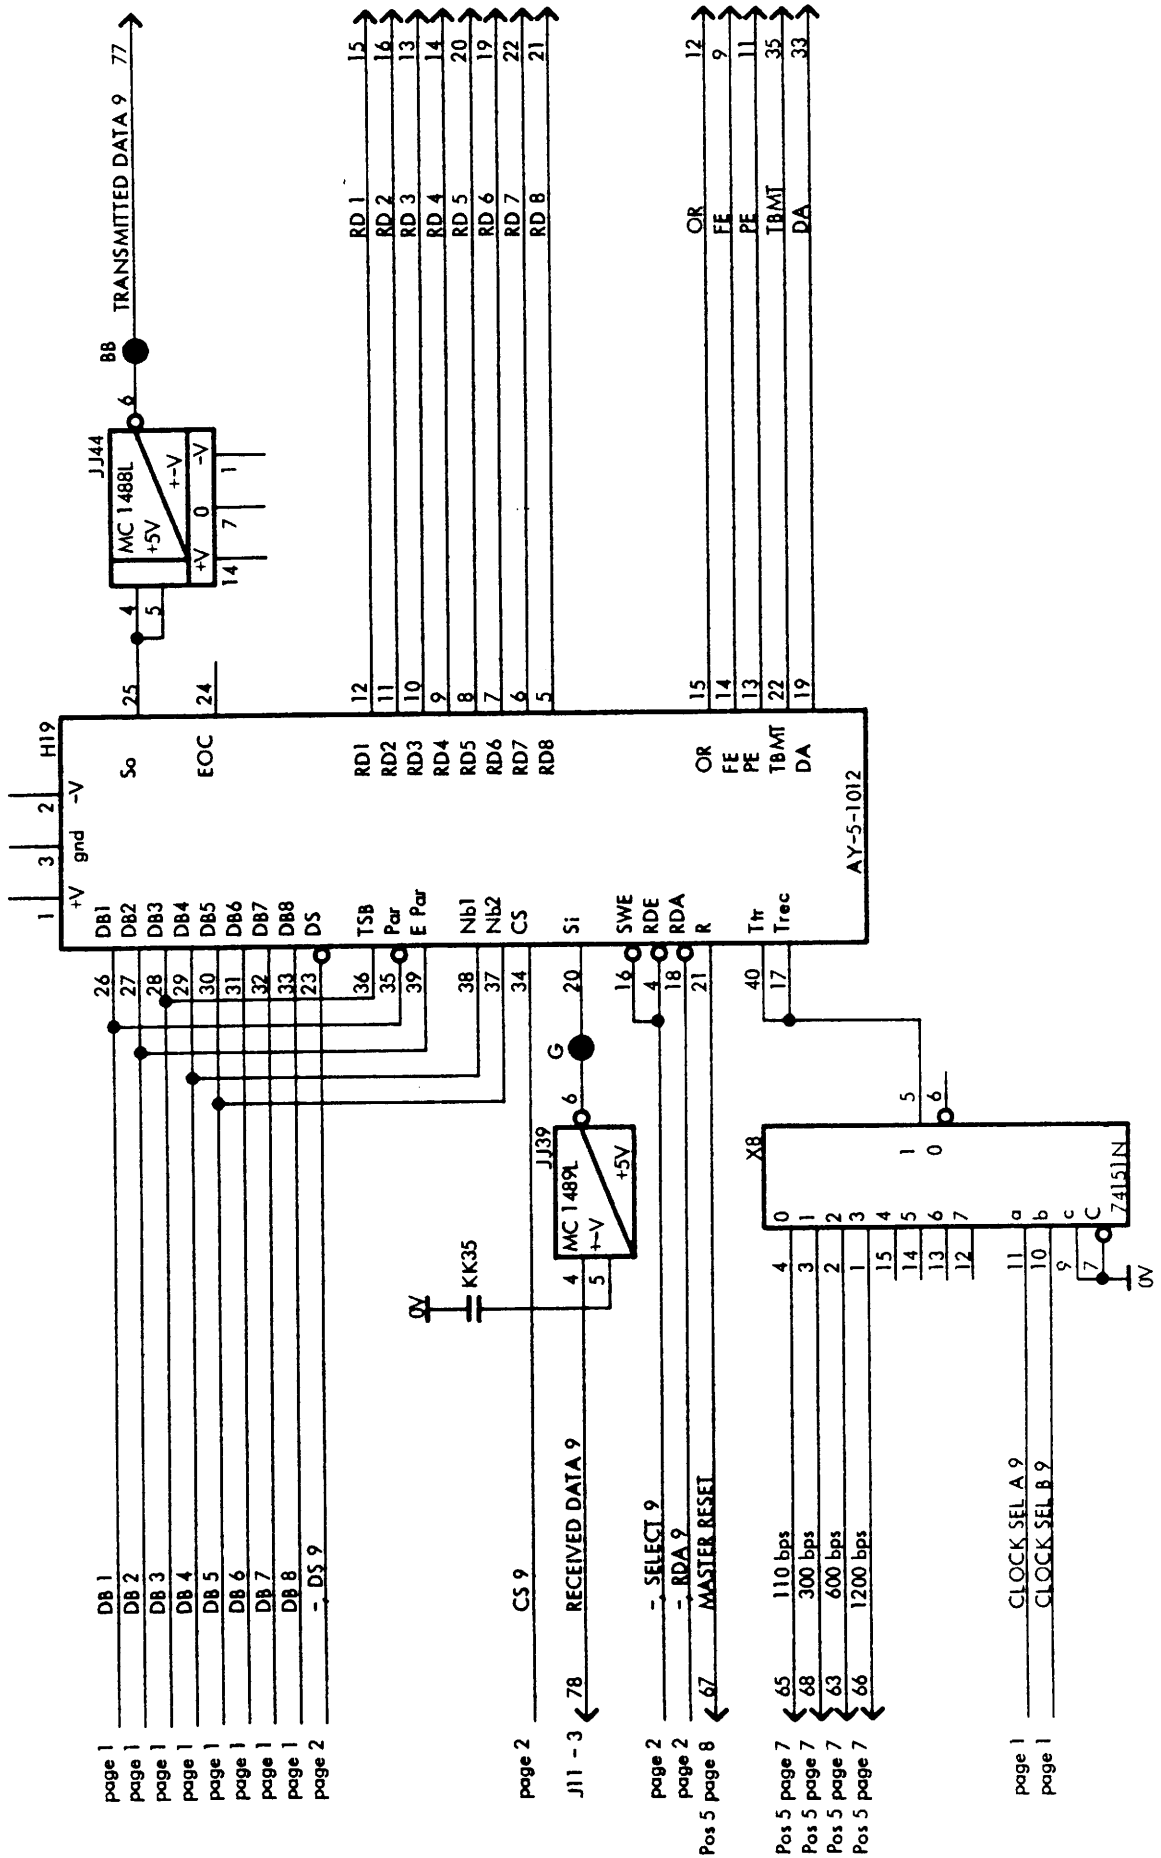


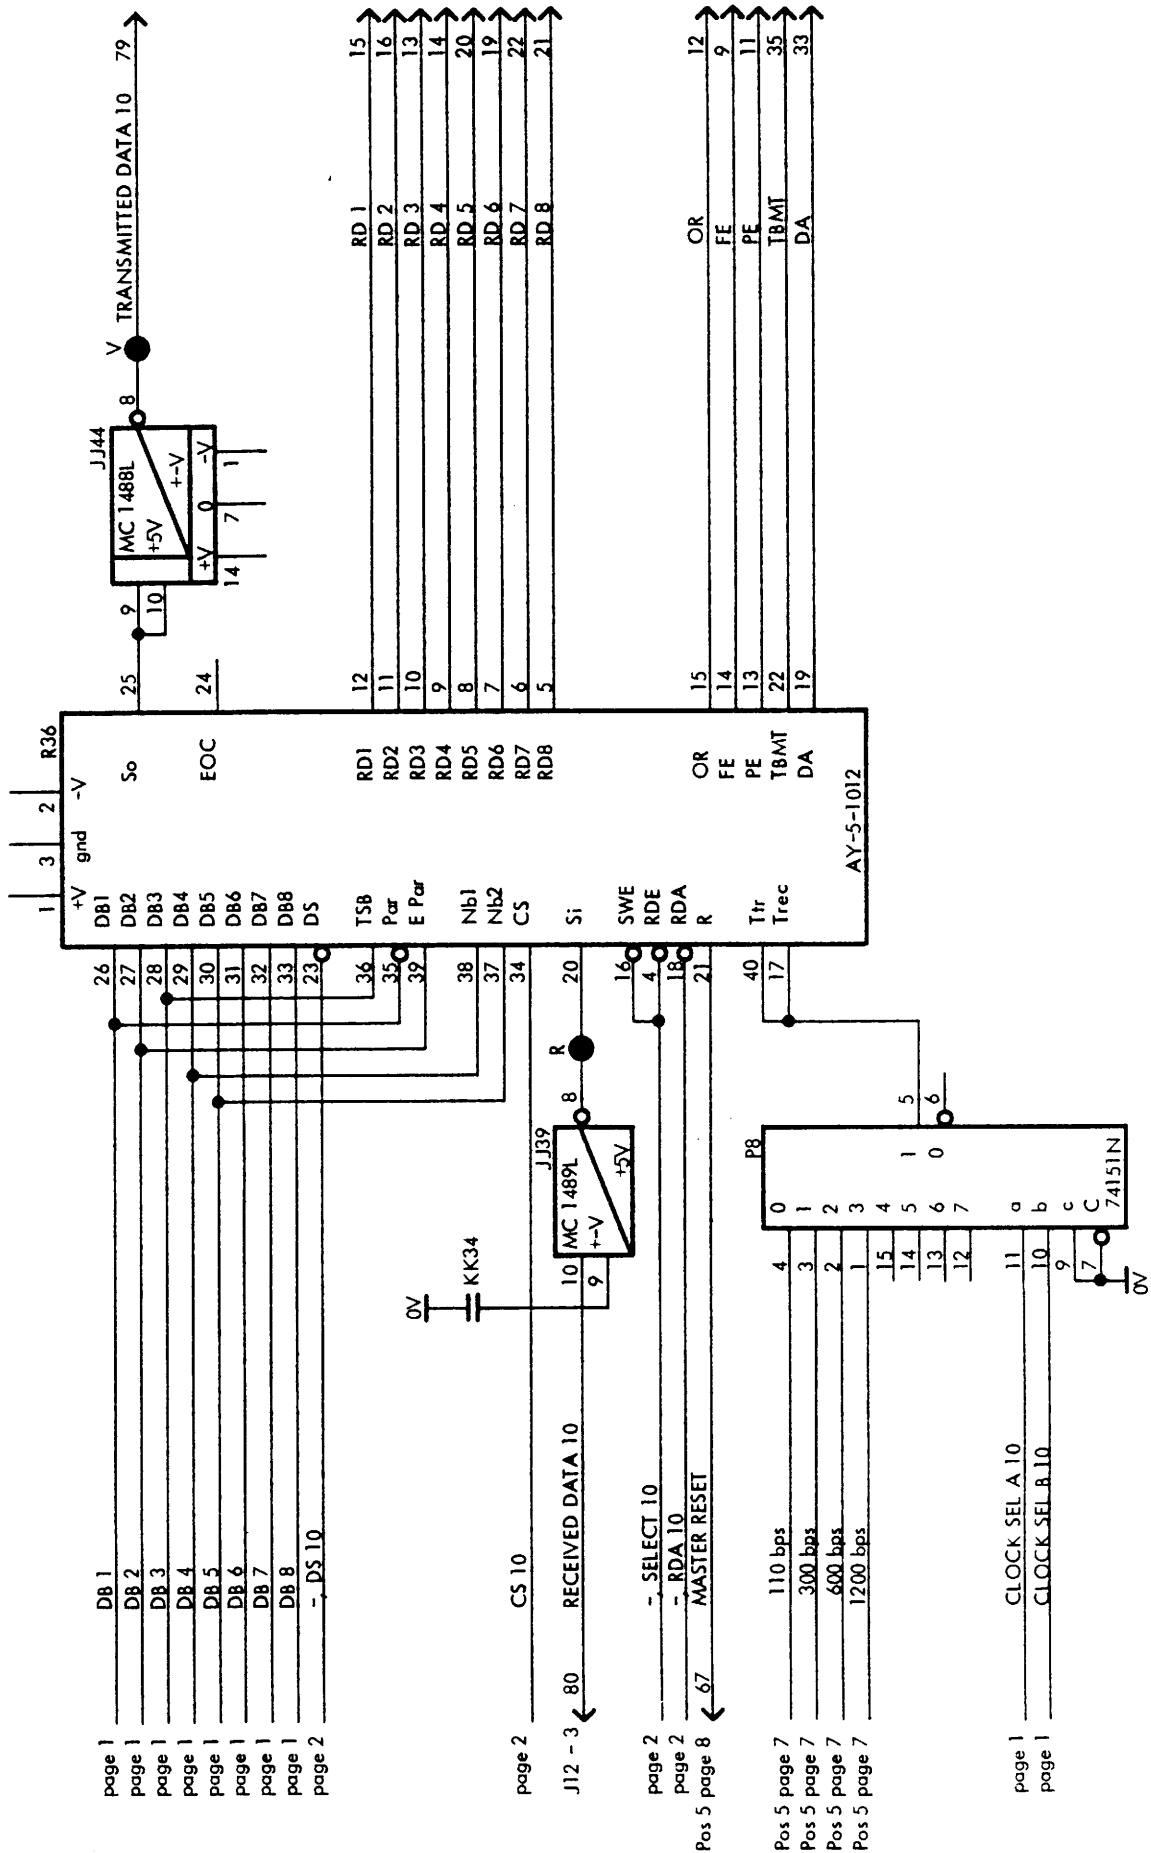











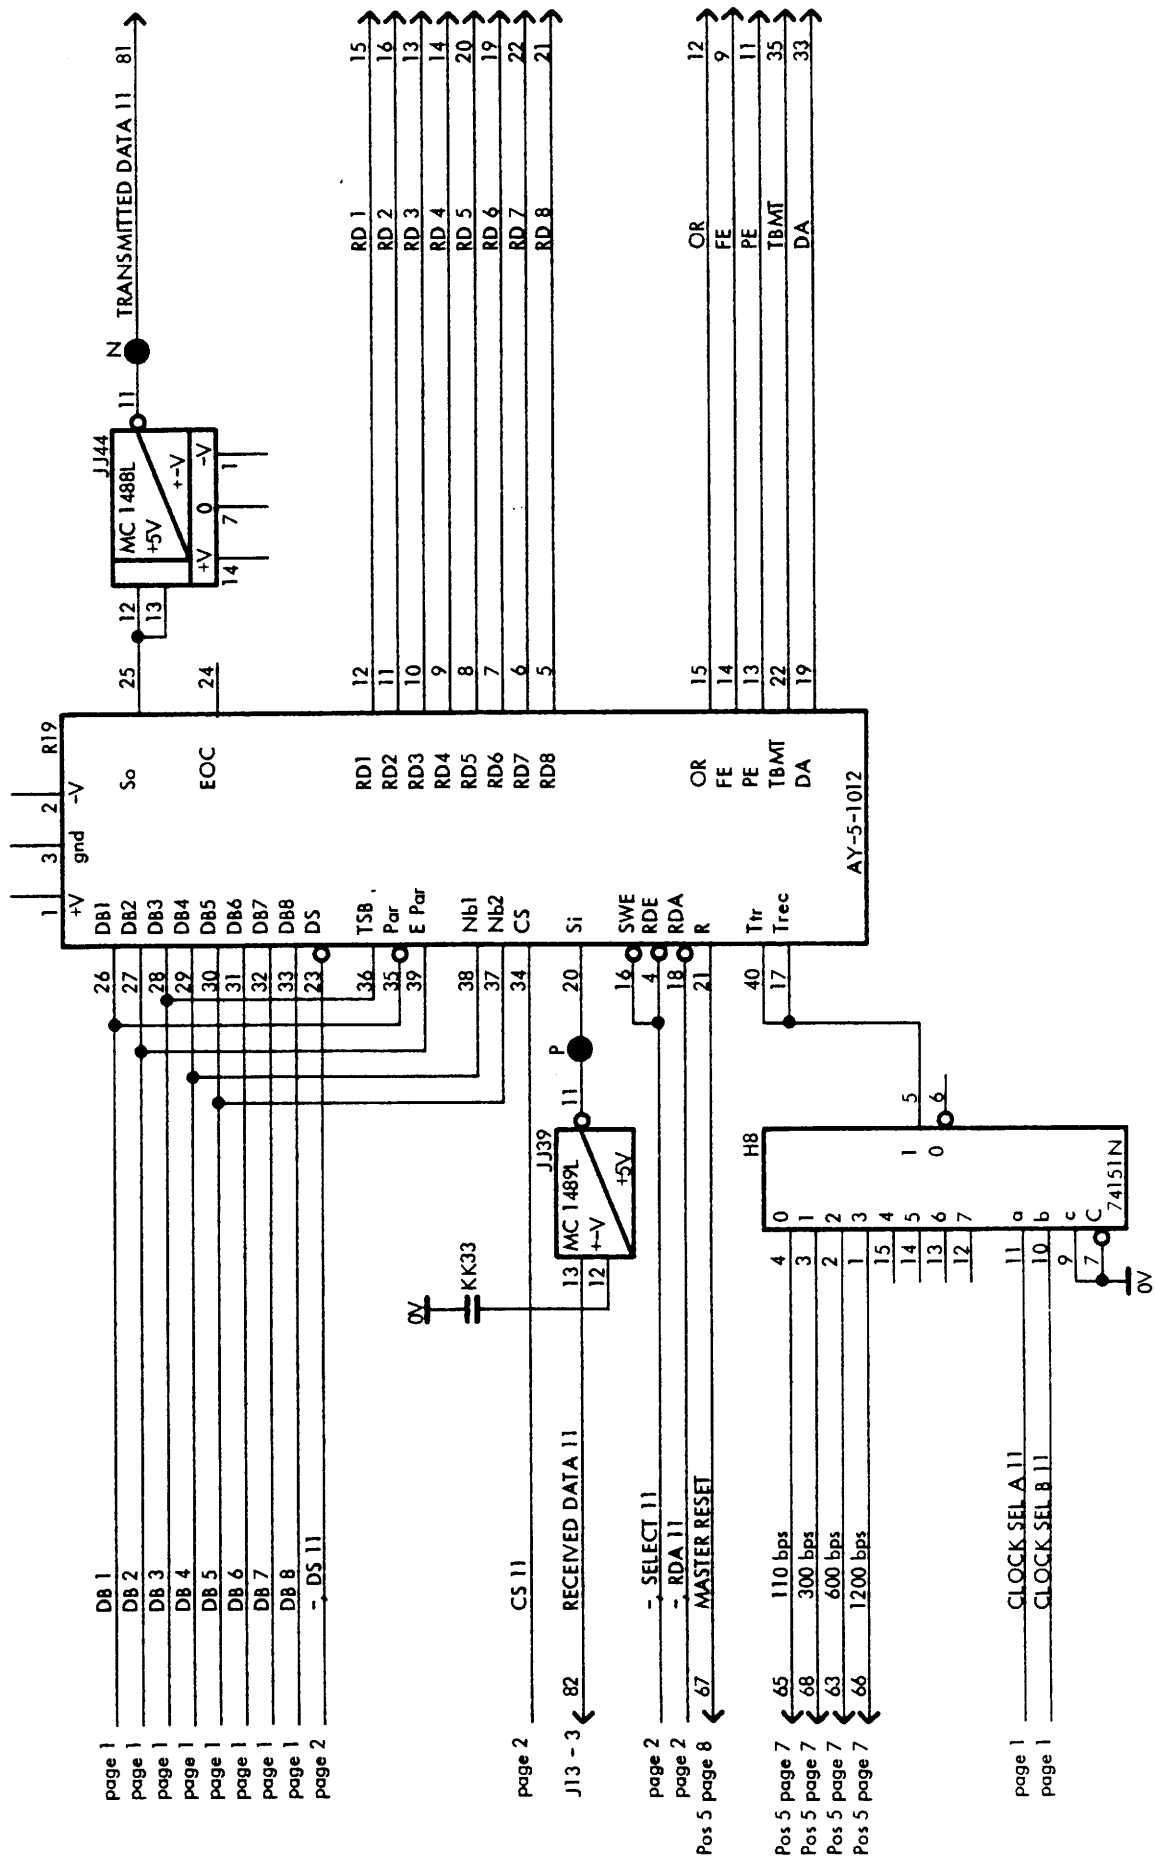


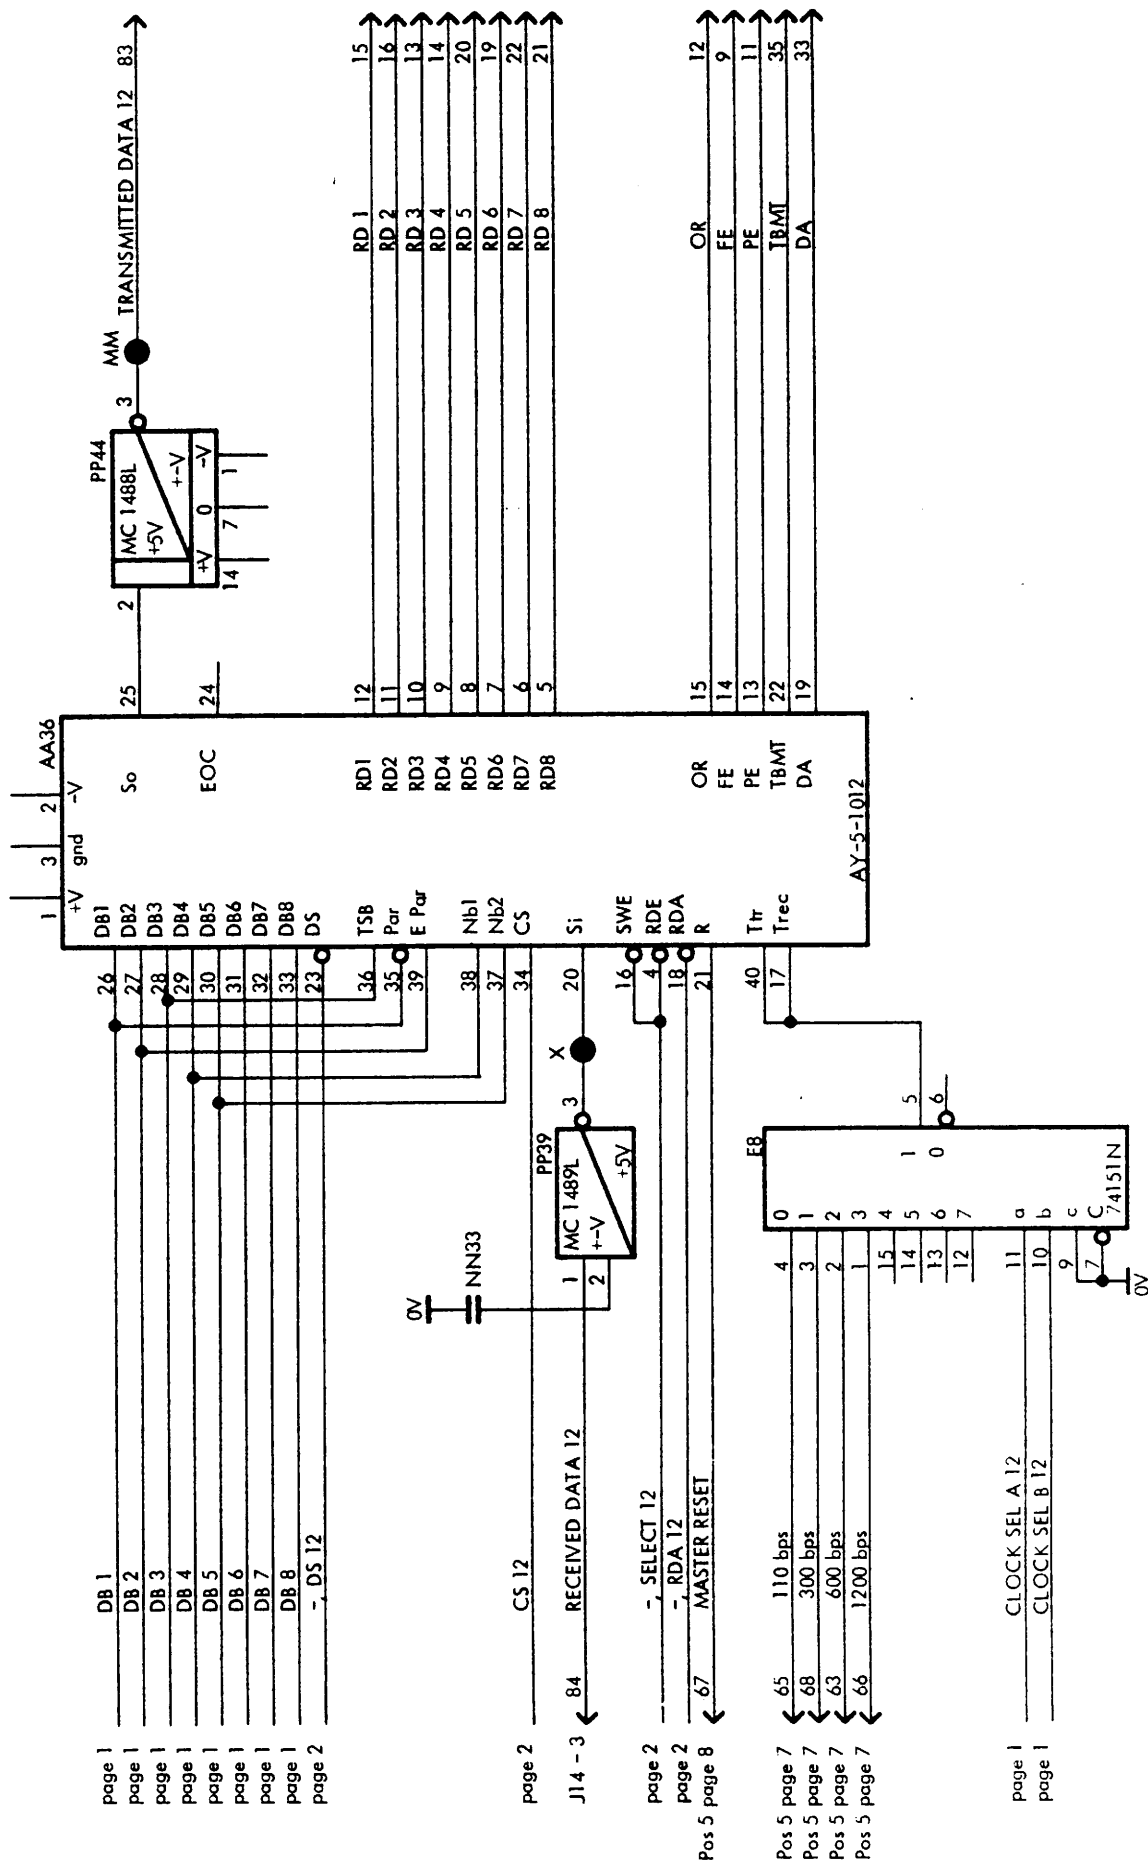










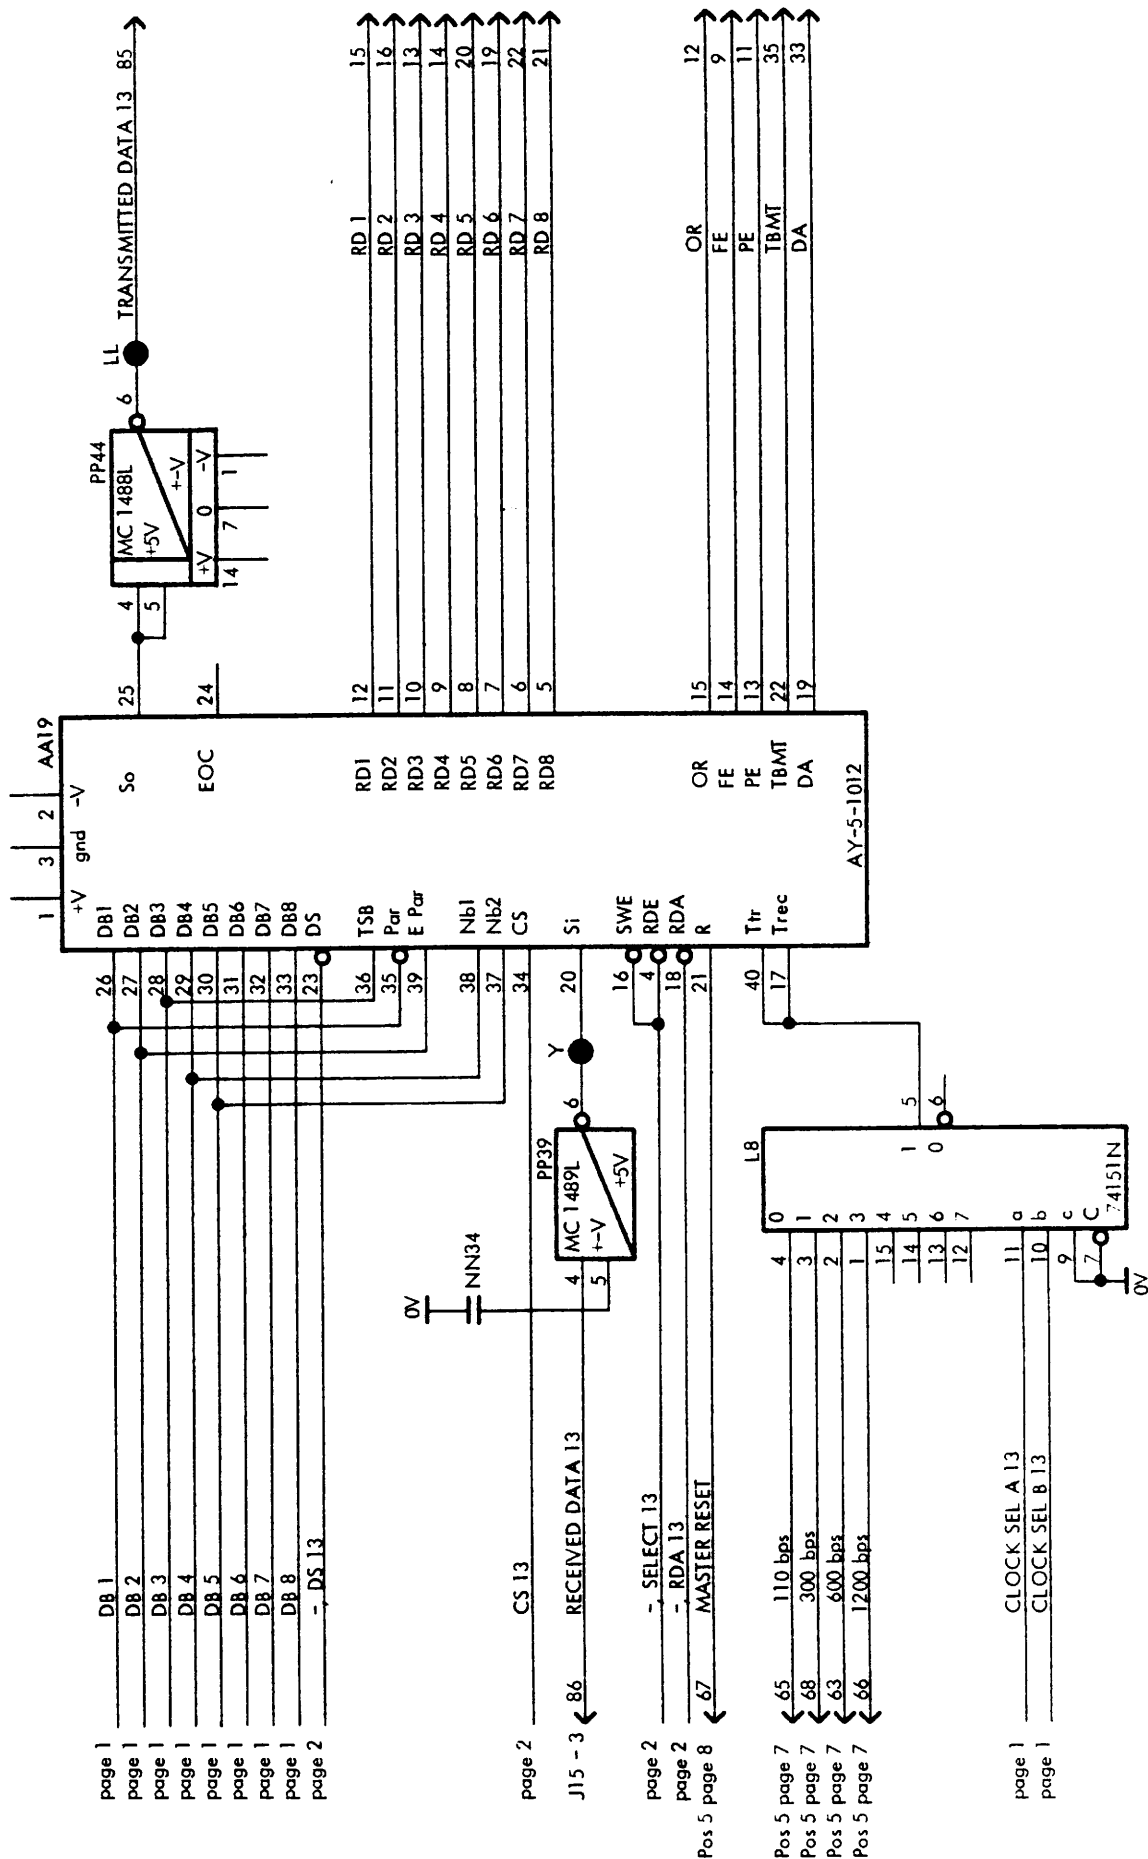


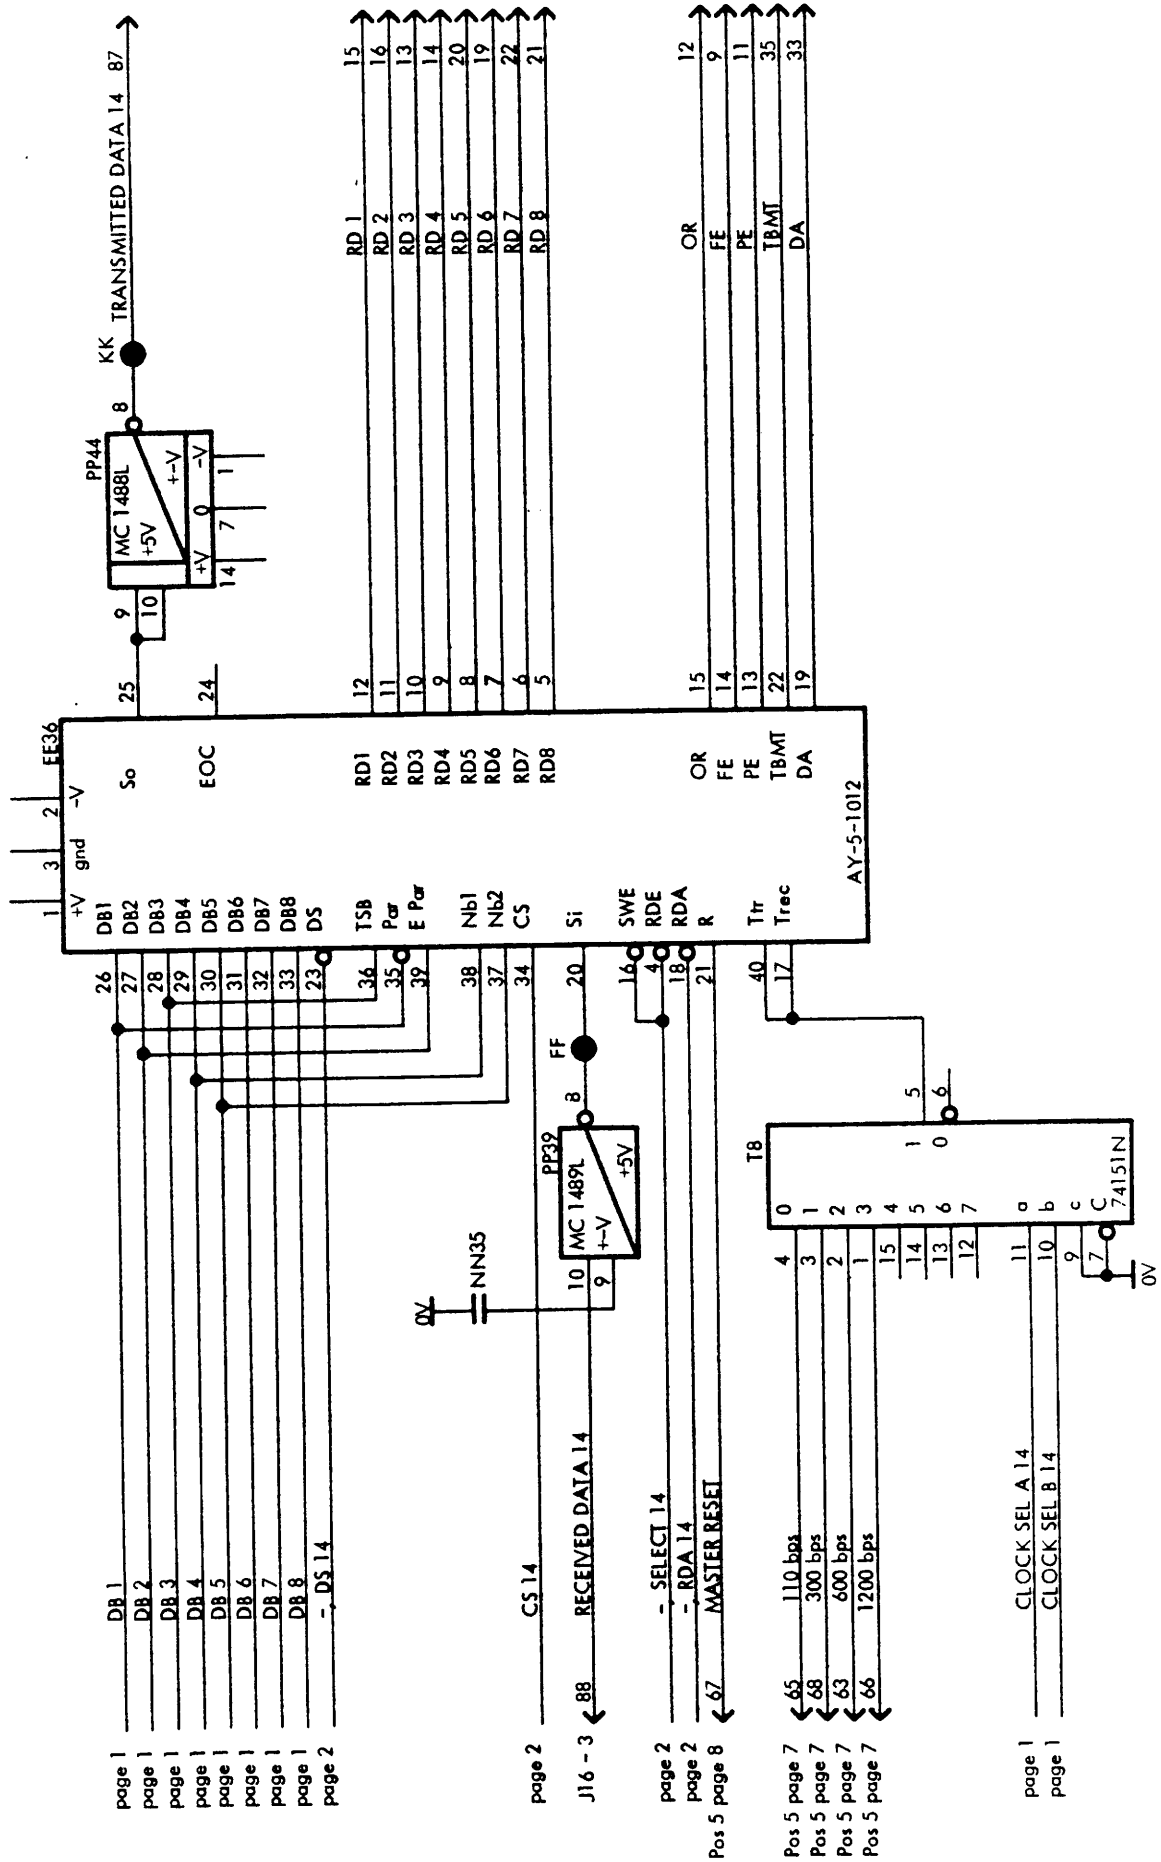










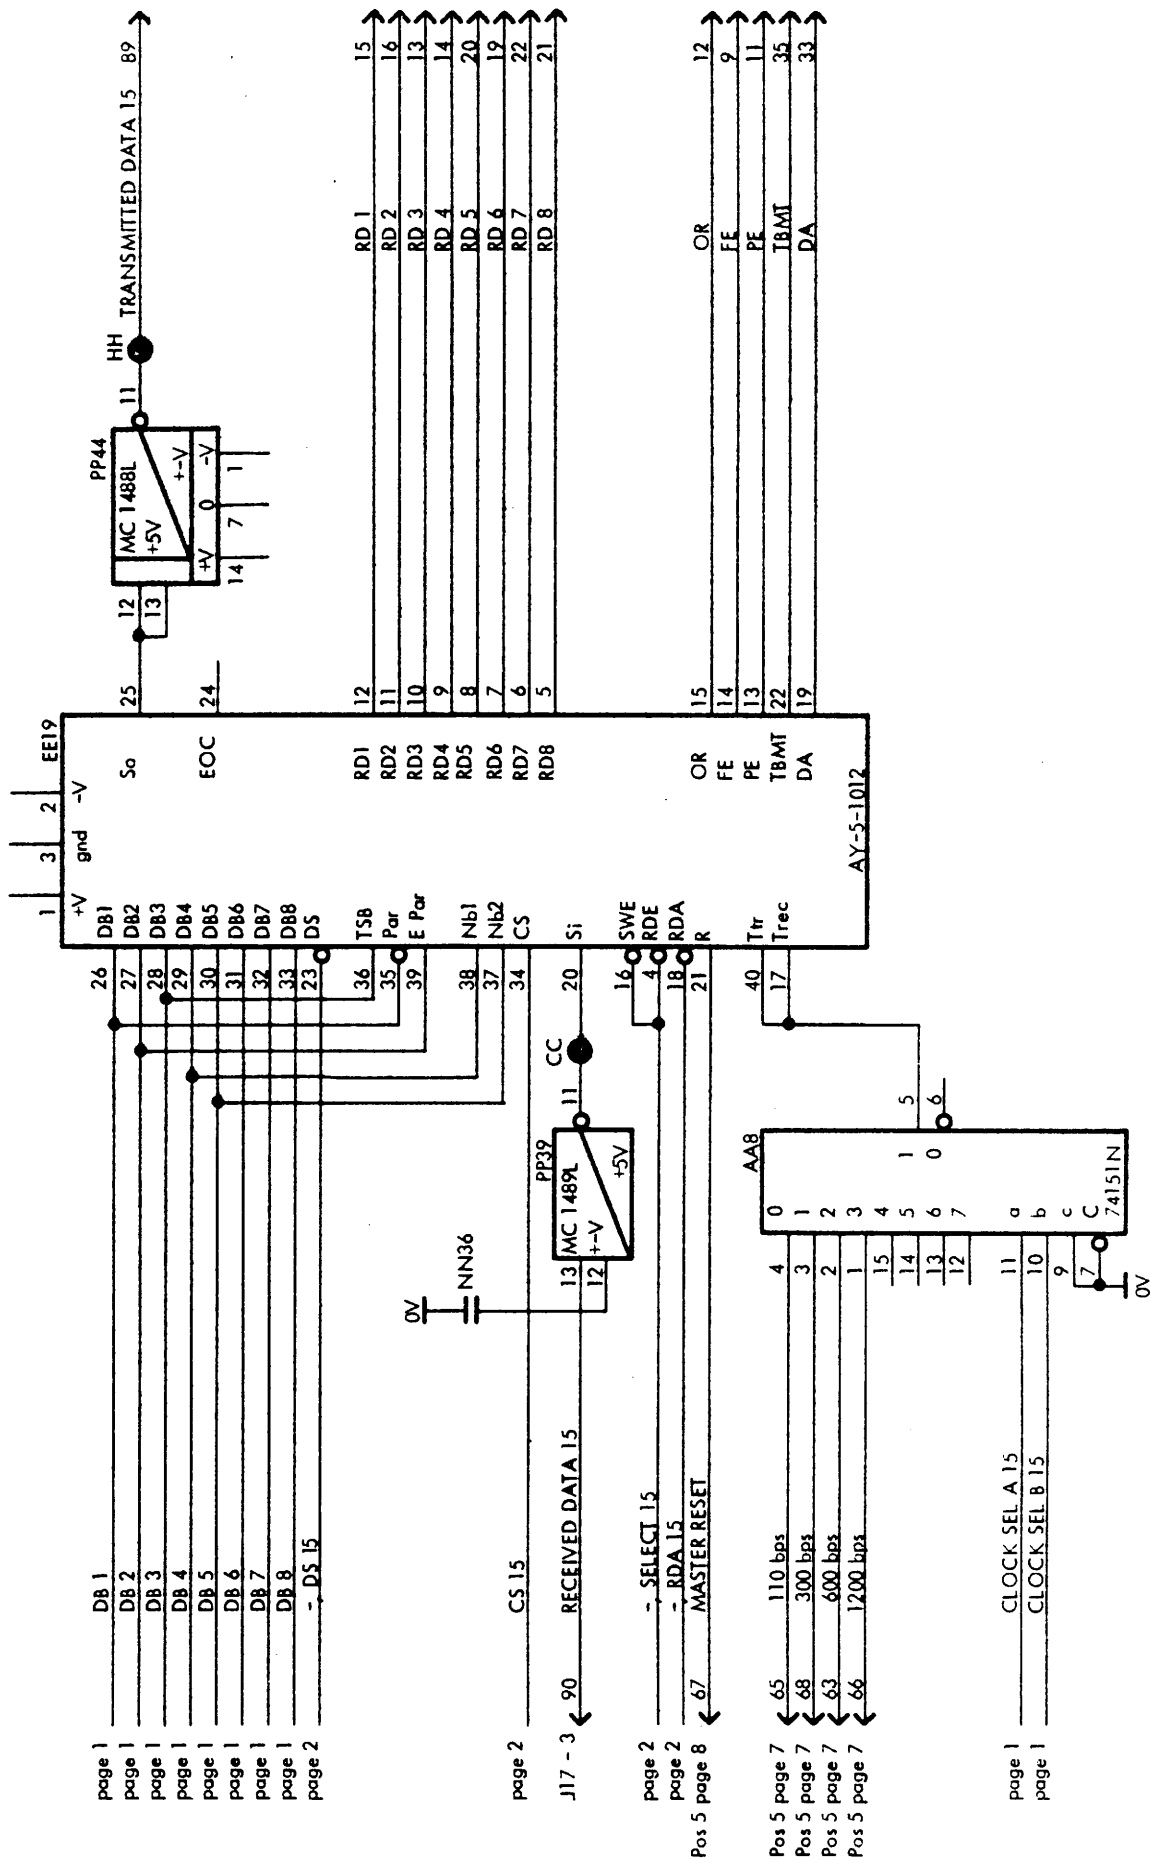


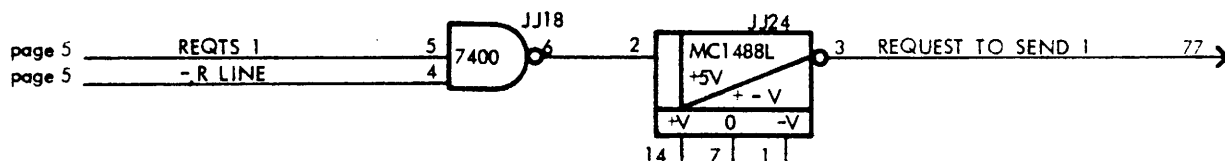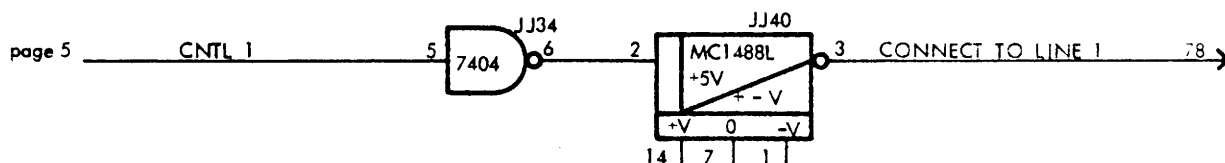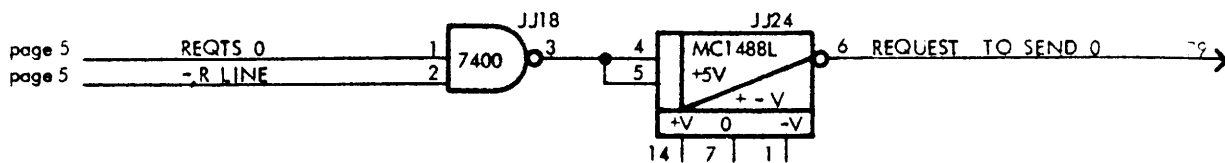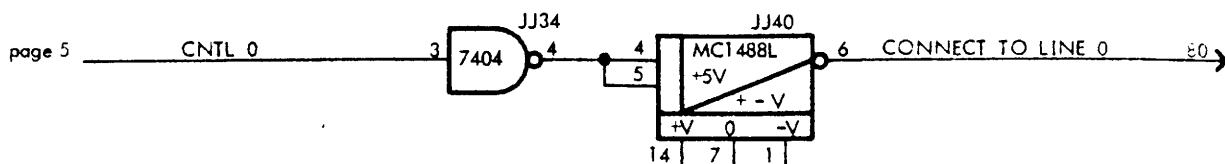


721218 KNEH 730720 AGS 730823 LLM

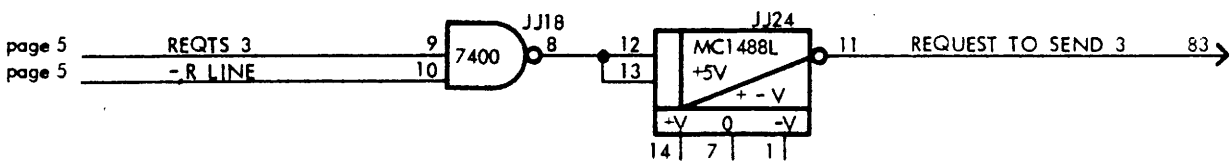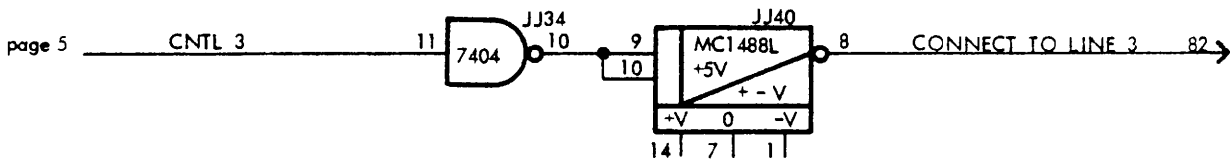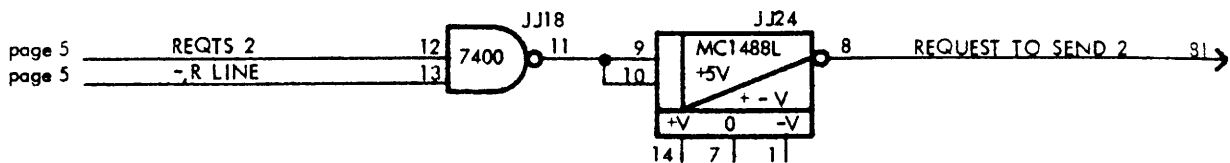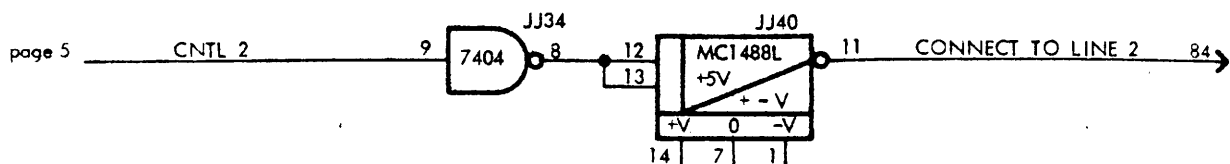

721218 KNEH 730720 AGS 730823 LLM

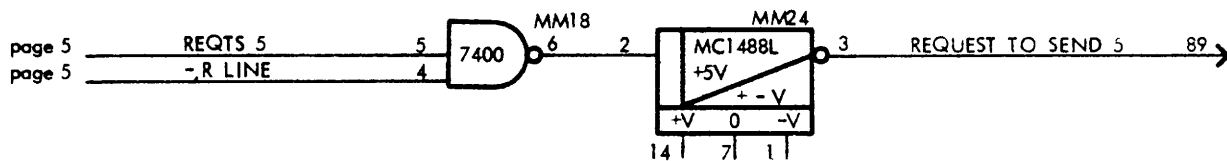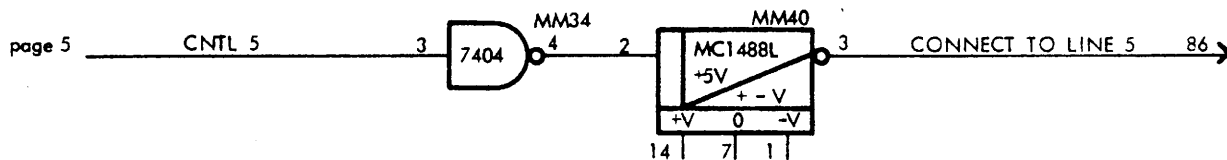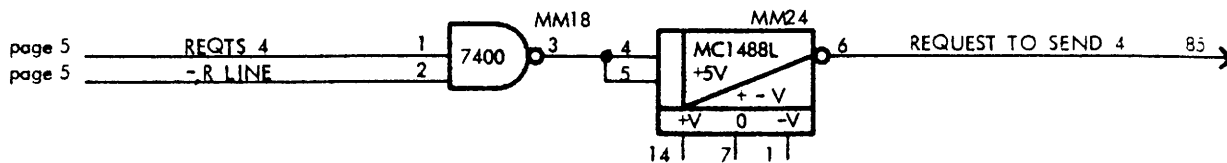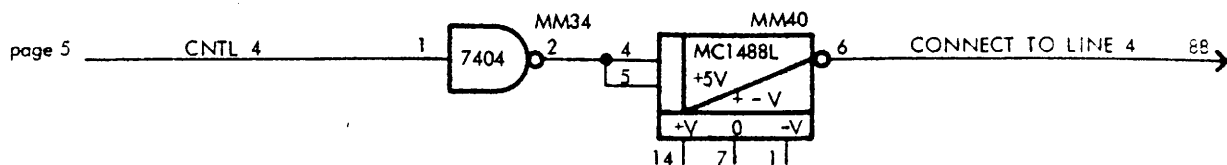


721218 KNEH 730720 AGS 730823 LLM

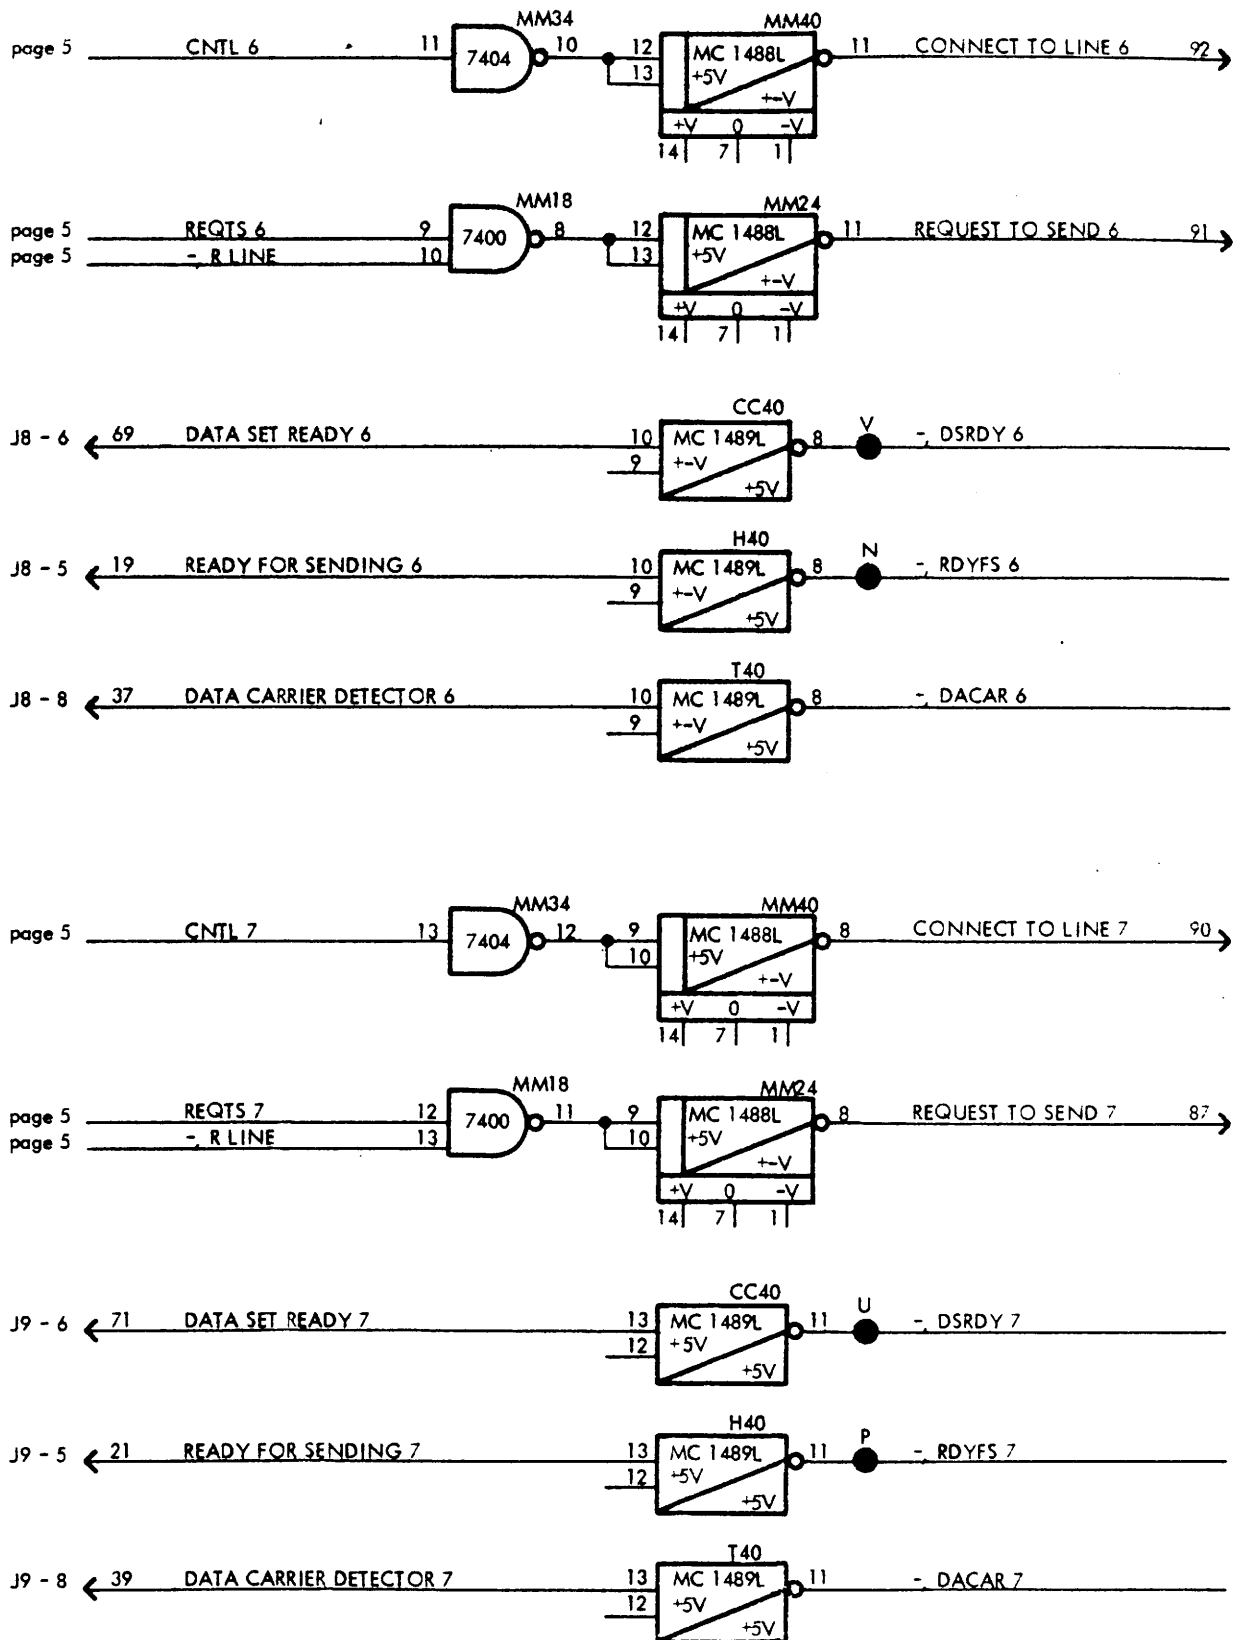


721218 KNEH 730723 AGS 730823 LLM

721221 KNEH 750828 AMS, 730823 LLM

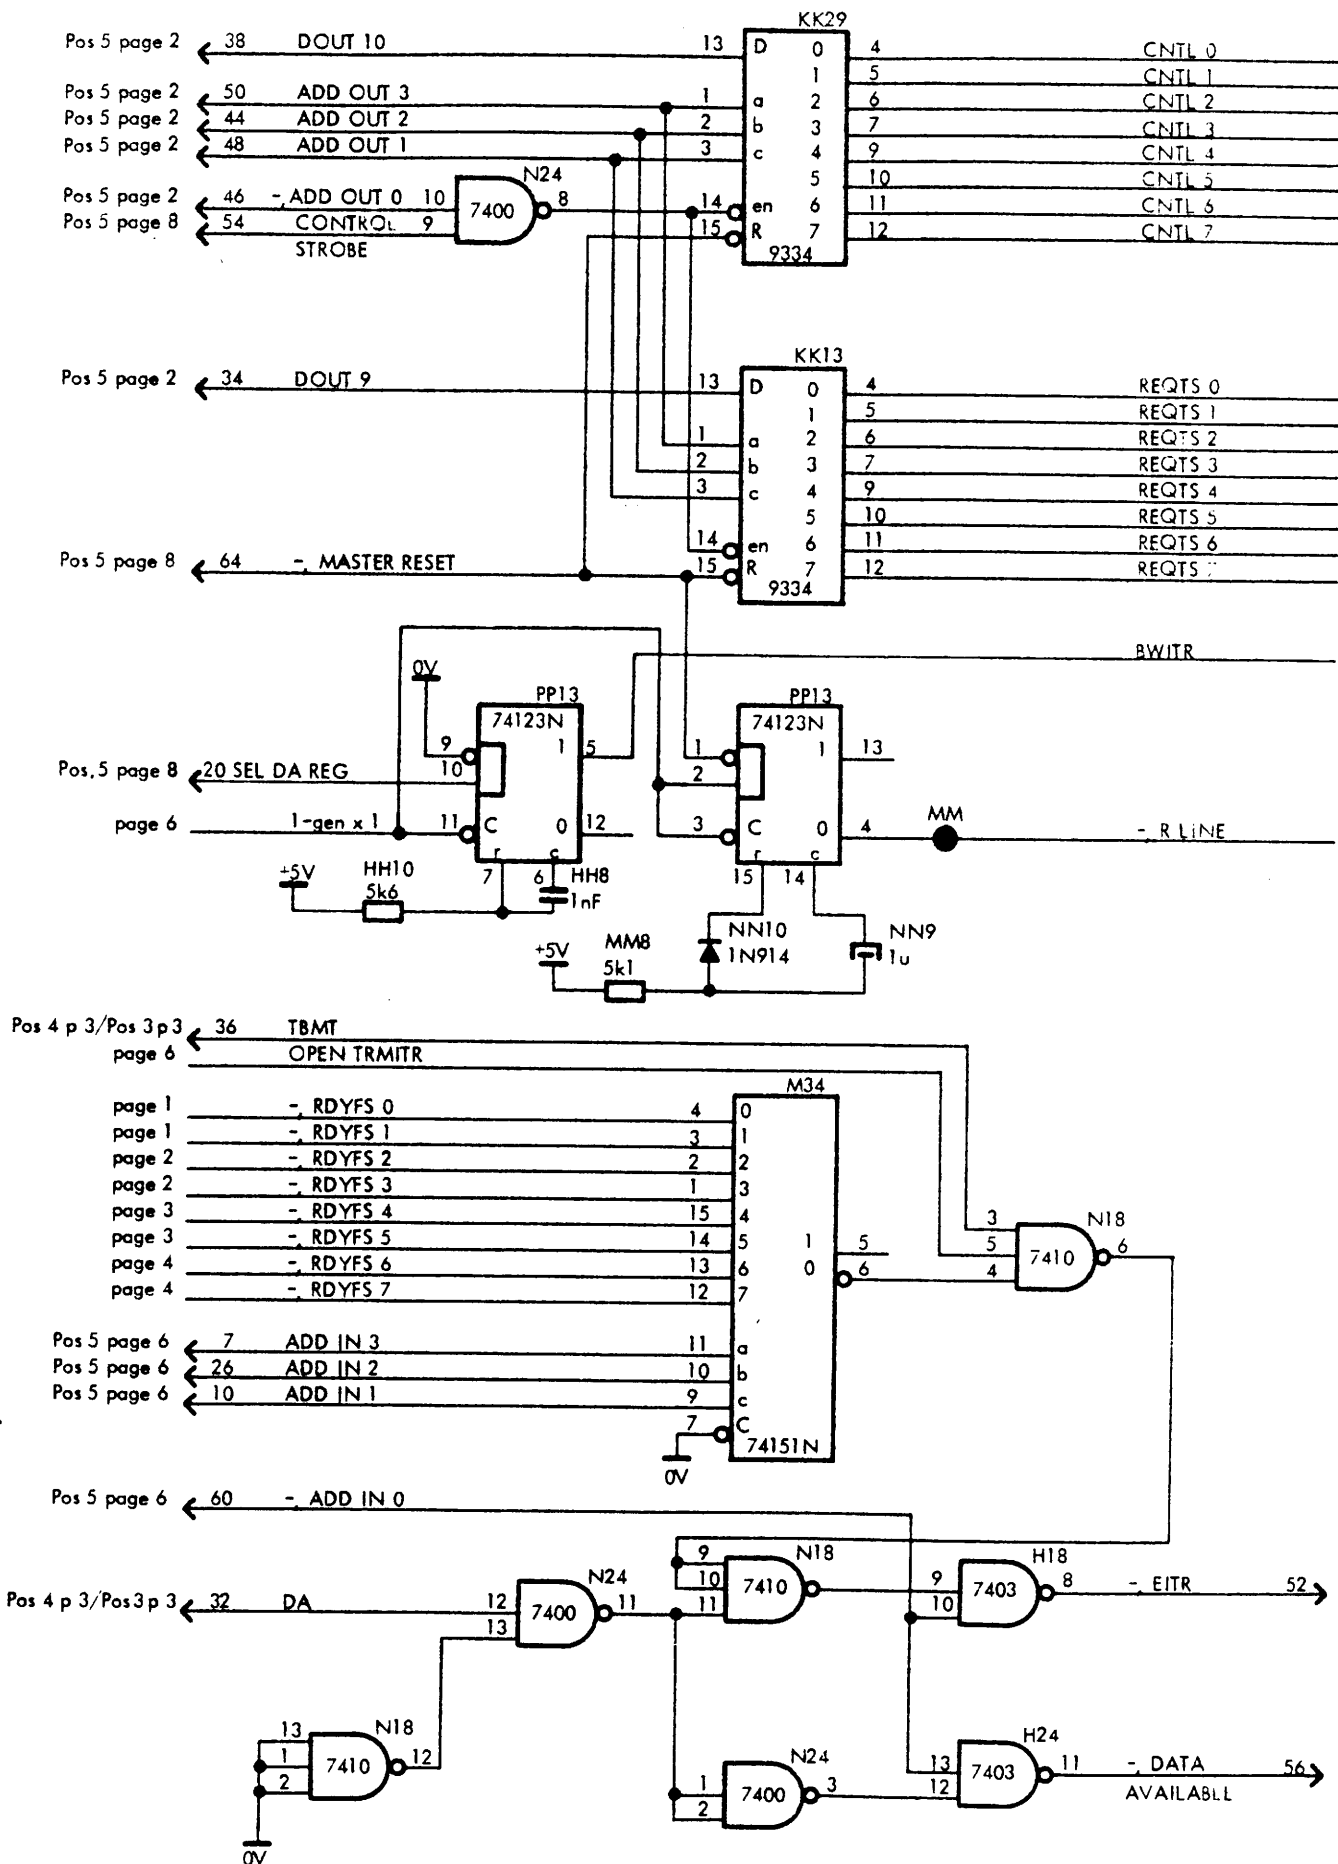

721218 KNEH 750828 AMS, 730823 LLM

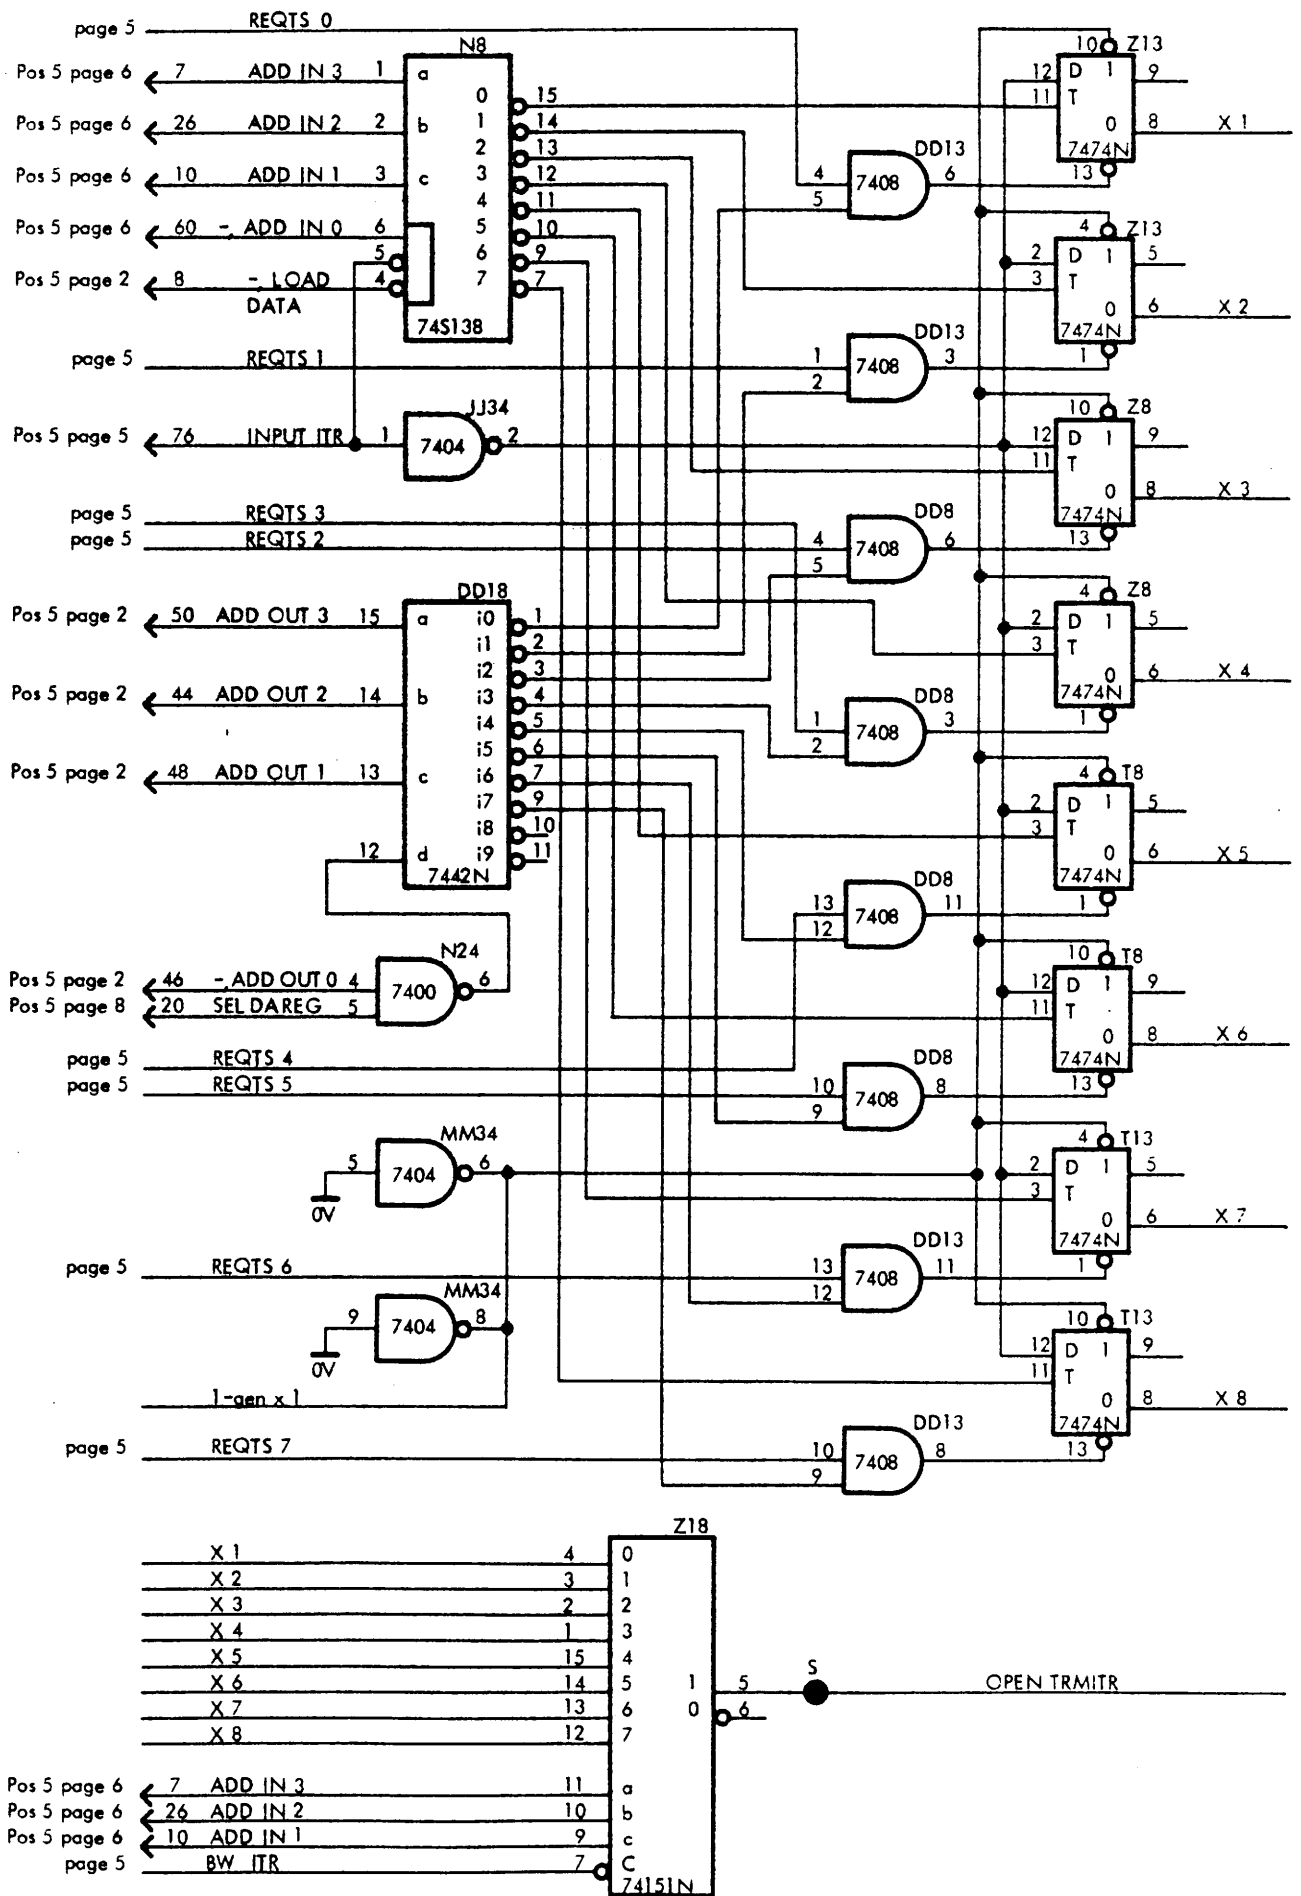

Pos 5 page 2 ← 46 - ADD OUT 0

page 1 - DSRDY 0 4
 page 1 - DSRDY 1 3
 page 2 - DSRDY 2 2
 page 2 - DSRDY 3 1
 page 3 - DSRDY 4 15
 page 3 - DSRDY 5 14
 page 4 - DSRDY 6 13
 page 4 - DSRDY 7 12


Pos 5 page 2 ← 50 ADD OUT 3
 Pos 5 page 2 ← 44 ADD OUT 2
 Pos 5 page 2 ← 48 ADD OUT 1

page 1 - RDYFS 0 4
 page 1 - RDYFS 1 3
 page 2 - RDYFS 2 2
 page 2 - RDYFS 3 1
 page 3 - RDYFS 4 15
 page 3 - RDYFS 5 14
 page 4 - RDYFS 6 13
 page 4 - RDYFS 7 12


page 1 - DACAR 0 4
 page 1 - DACAR 1 3
 page 2 - DACAR 2 2
 page 2 - DACAR 3 1
 page 3 - DACAR 4 15
 page 3 - DACAR 5 14
 page 4 - DACAR 6 13
 page 4 - DACAR 7 12

Pos 5 page 6 ← 7 ADD IN 3
 Pos 5 page 6 ← 26 ADD IN 2
 Pos 5 page 6 ← 10 ADD IN 1


Pos 5 page 6 ← 60 - ADD IN 0

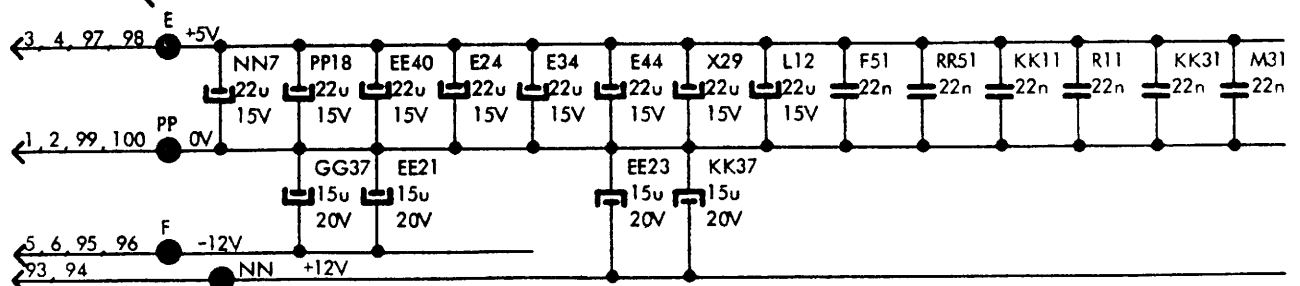


CC34




74151N



74151N



74151N



74151N



H24

GG

- DSR 28



H24

T

- RDYFS 40



H18

R











- DCD 42













H24

HH











- MODEM ERROR 25

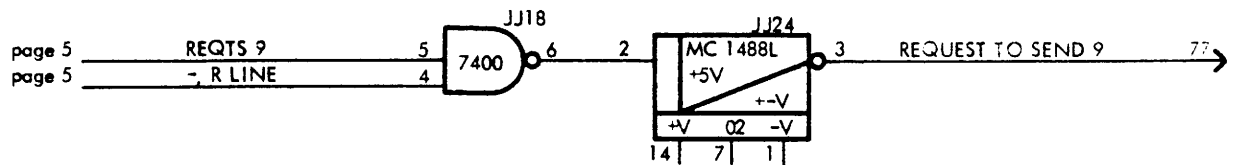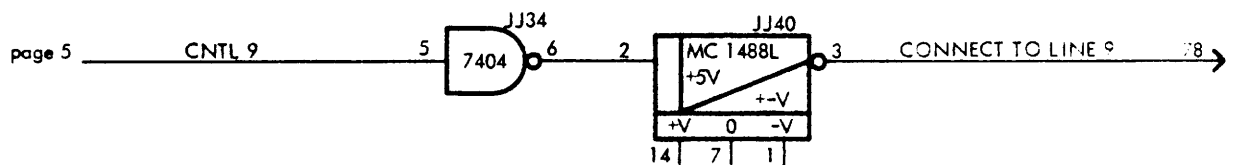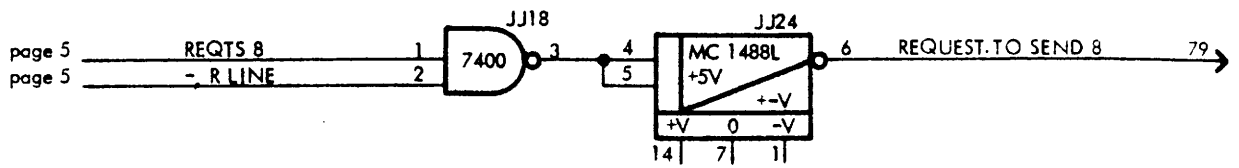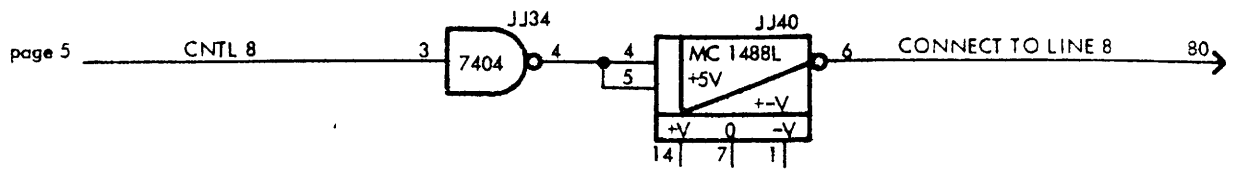











721213 KNEH 730726 IGH 730824 LLM

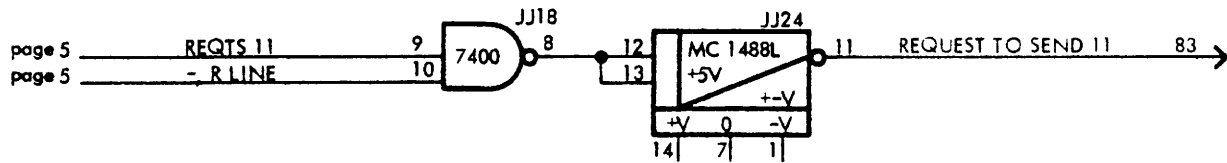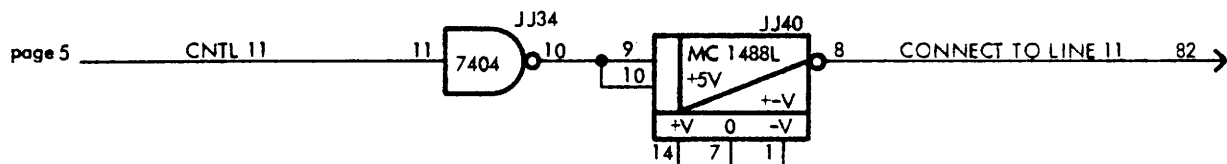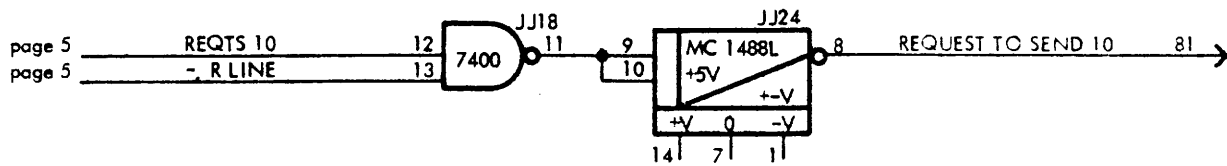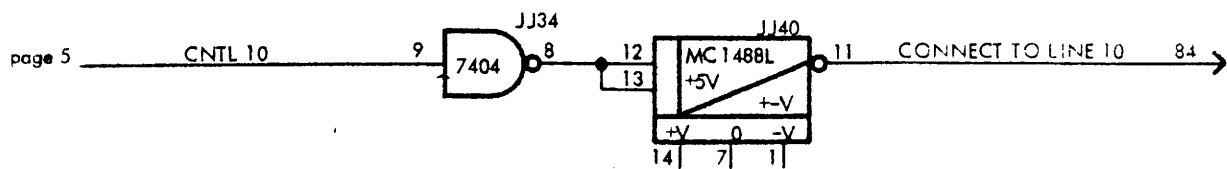


721218 KNEH 730726 IGH 730824 LLM

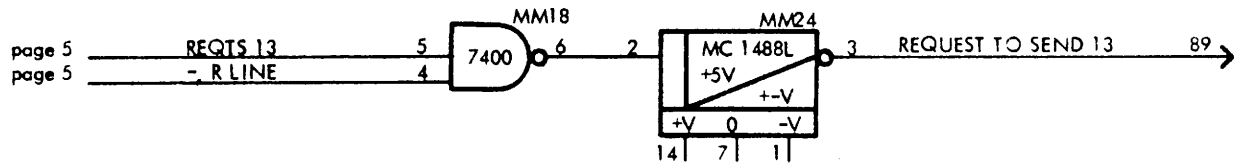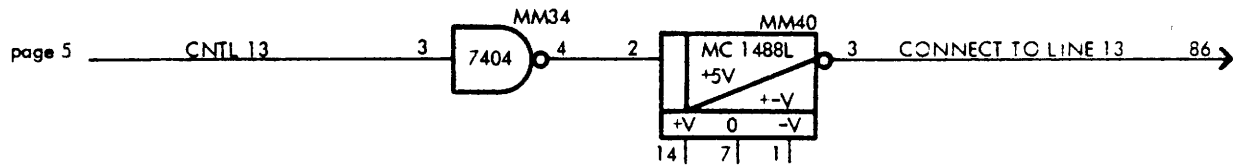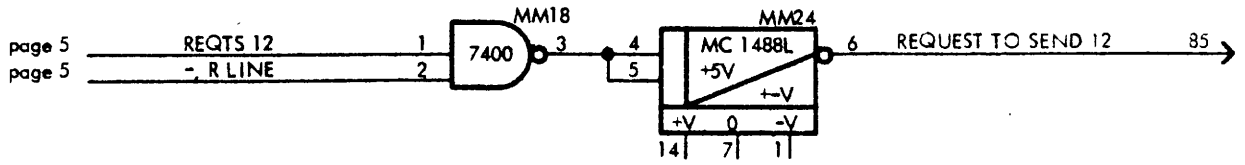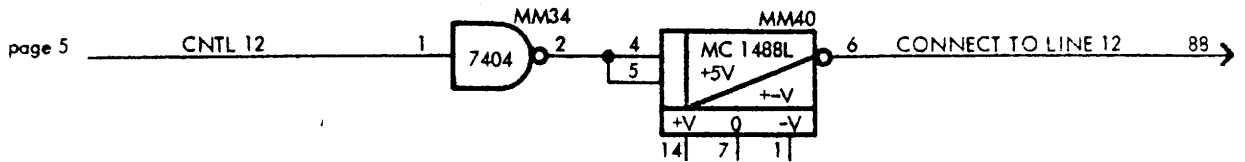


721218 KNEH 730726 IGH 730824 LLM

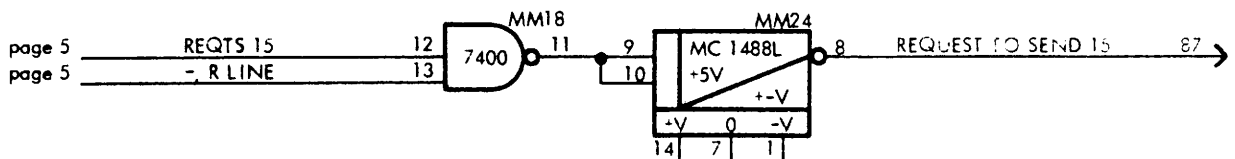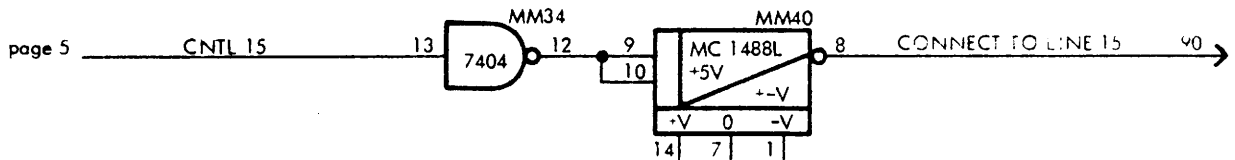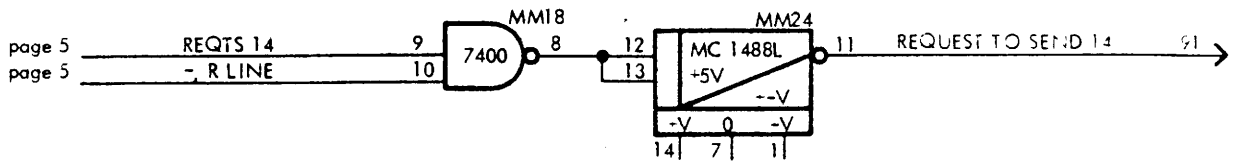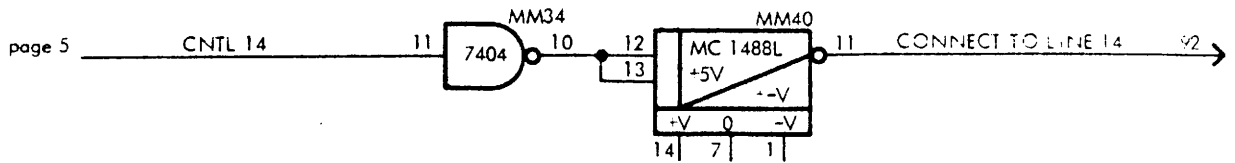

721218 KNEH 730726 IGH 730834 LLM

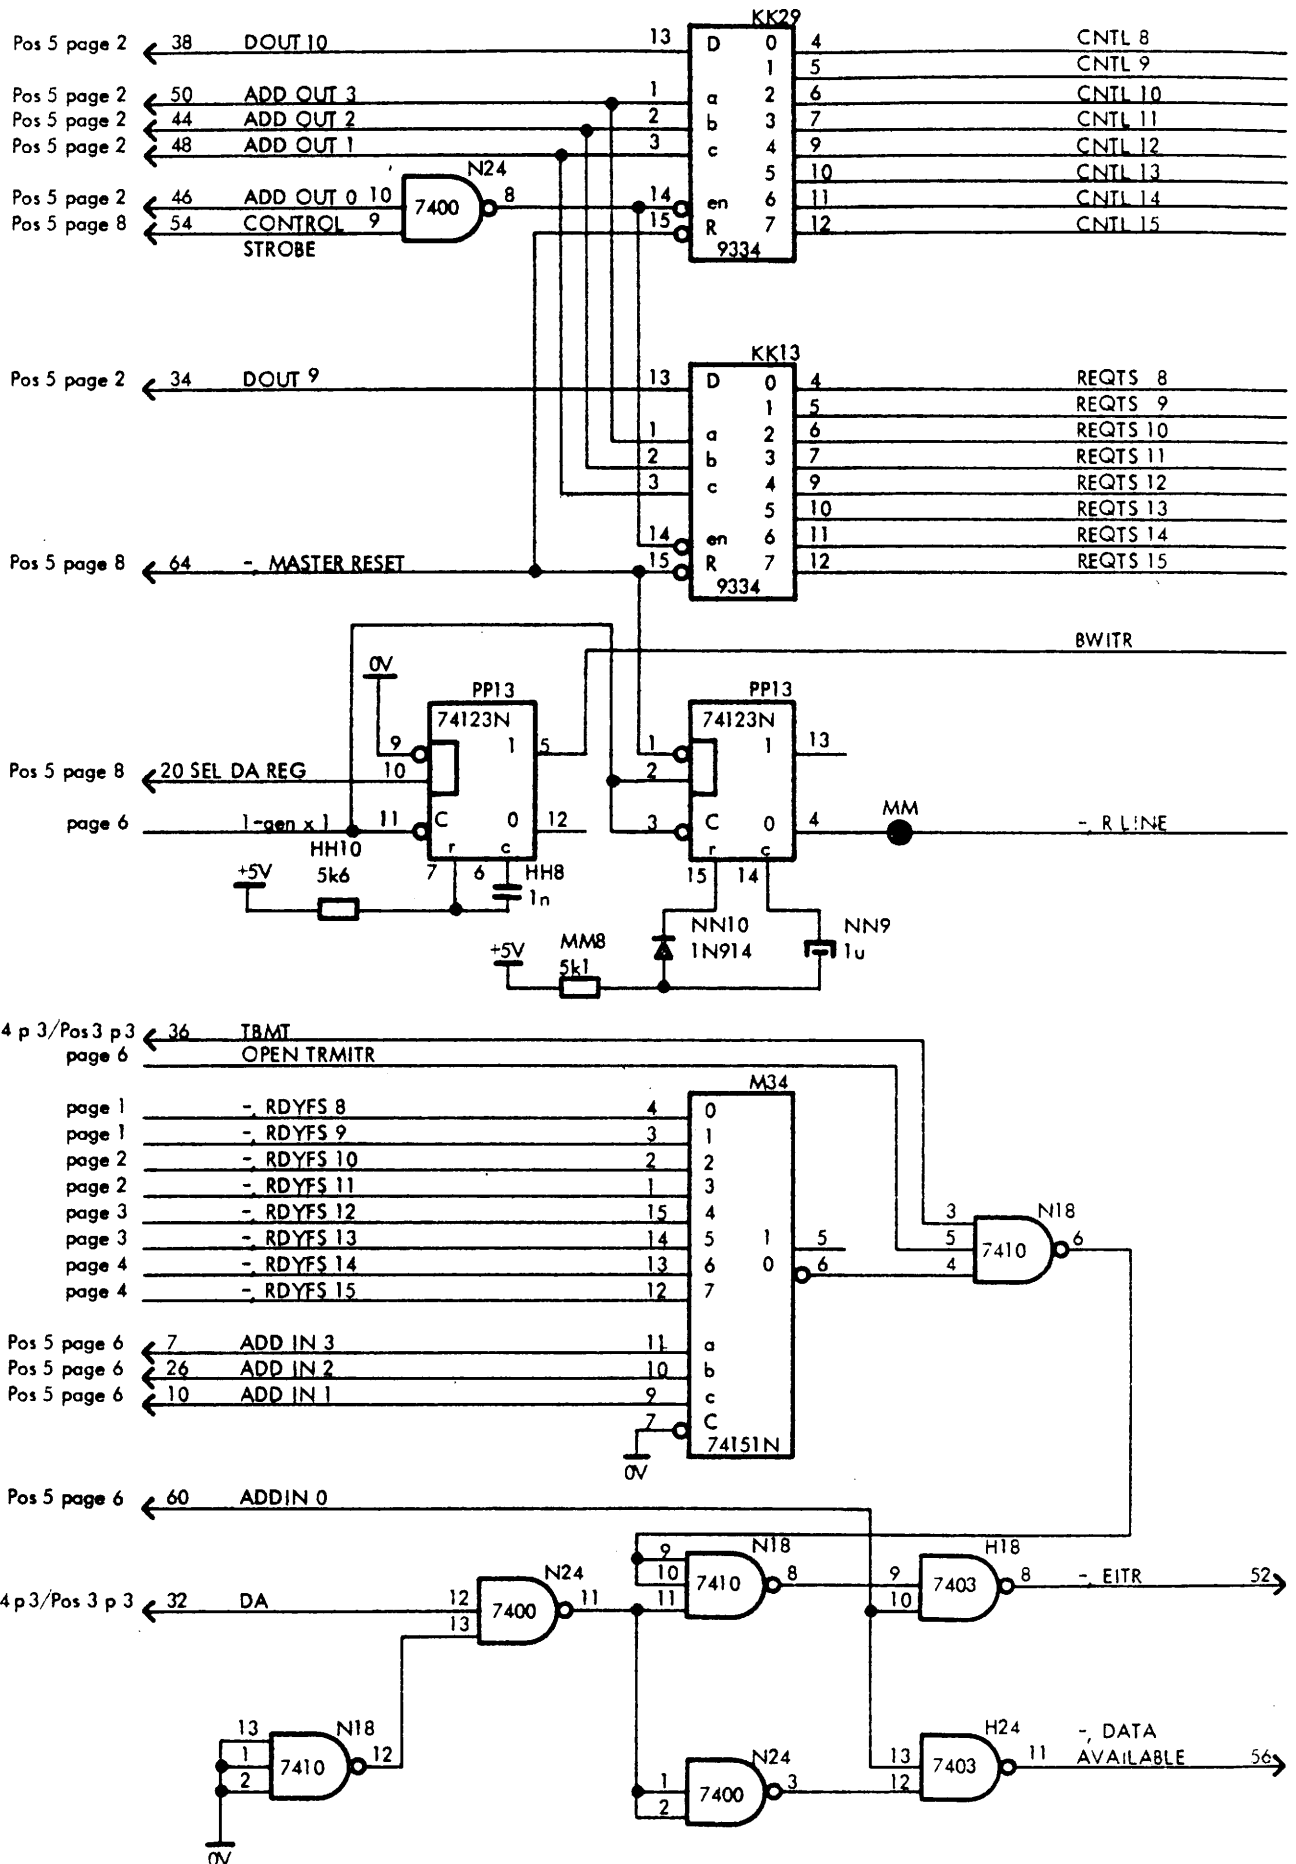

721218 KNEH 730726 IGH 730824 LLM

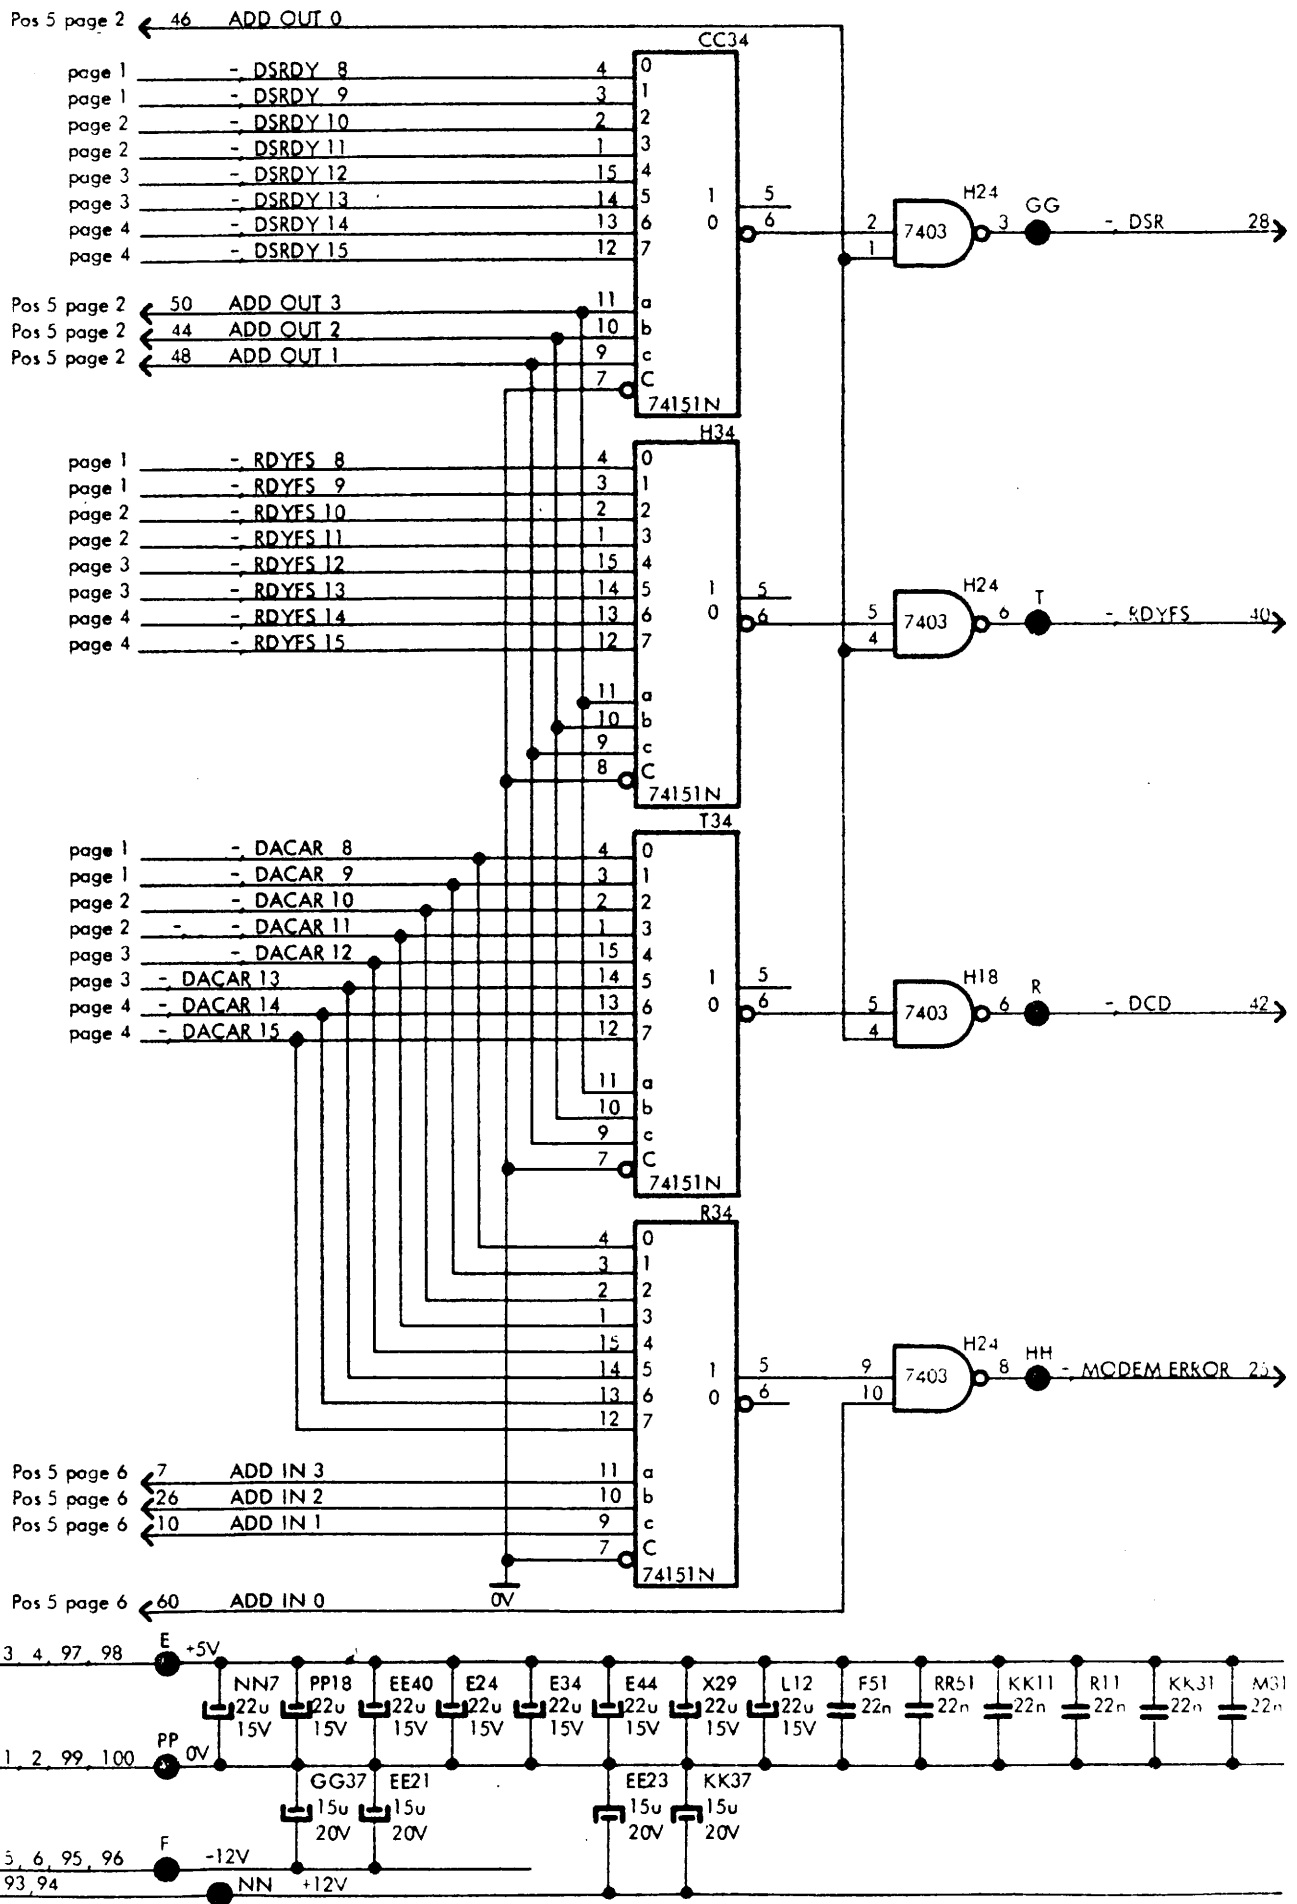

LAM 108/116

A11668

STATUS SELECTORS

Circuit Diagram

Doc 1
 RC 3234 - 1
 p 1 of 1
 M15 14

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION OG PLUG PINS I MODUL CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 1500 A5	5 - 6 VOLT	+	10 23	7 20	4 17	1 14
		+sense	11	8	5	2
		-sense	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION OG PLUG PINS I MODUL CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 500 A15	12 - 15 VOLT	+	10 23	7 20	4 17	1 14
		+sense	11	8	5	2
		-sense	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION OG PLUG PINS I MODUL CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 B 15/15	12 - 15 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION OG PLUG PINS I MODUL CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 C 5/15	5 - 6 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION OG PLUG PINS I MODUL CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4

730719KNEH 730719 AGS 730719LLM

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 1500 A5	5 - 6 VOLT	+	10 23	7 20	4 17	1 14
		+sense	11	8	5	2
		-sense	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 500 A15	12 - 15 VOLT	+	10 23	7 20	4 17	1 14
		+sense	11	8	5	2
		-sense	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 B 15/15	12 - 15 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 C 5/15	5 - 6 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4

730719 AGS 741113 LLM

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE				
			Pos. 1	Pos. 2	Pos. 3	Pos. 4	Pos. 5
PC 1500 A5	5 - 6 VOLT	+	10 23	7 20	4 17	1 14	10 23
		+sense	11	8	5	2	11
		-sense	24	21	18	15	24
		-	12 25	9 22	6 19	3 16	12 25


POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 500 A15	12 - 15 VOLT	+	10 23	7 20	4 17	1 14
		+sense	11	8	5	2
		-sense	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 B 15/15	12 - 15 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4
PC 250 C 5/15	5 - 6 VOLT	-	10 23	7 20	4 17	1 14
		+	11	8	5	2
	12 - 15 VOLT	+	24	21	18	15
		-	12 25	9 22	6 19	3 16

POWER CARD TYPE	Vout	Vout TERMINAL	POSITION AND PLUG PINS IN MODULE CASSETTE			
			Pos. 1	Pos. 2	Pos. 3	Pos. 4

730719 AGS 741113 LLM

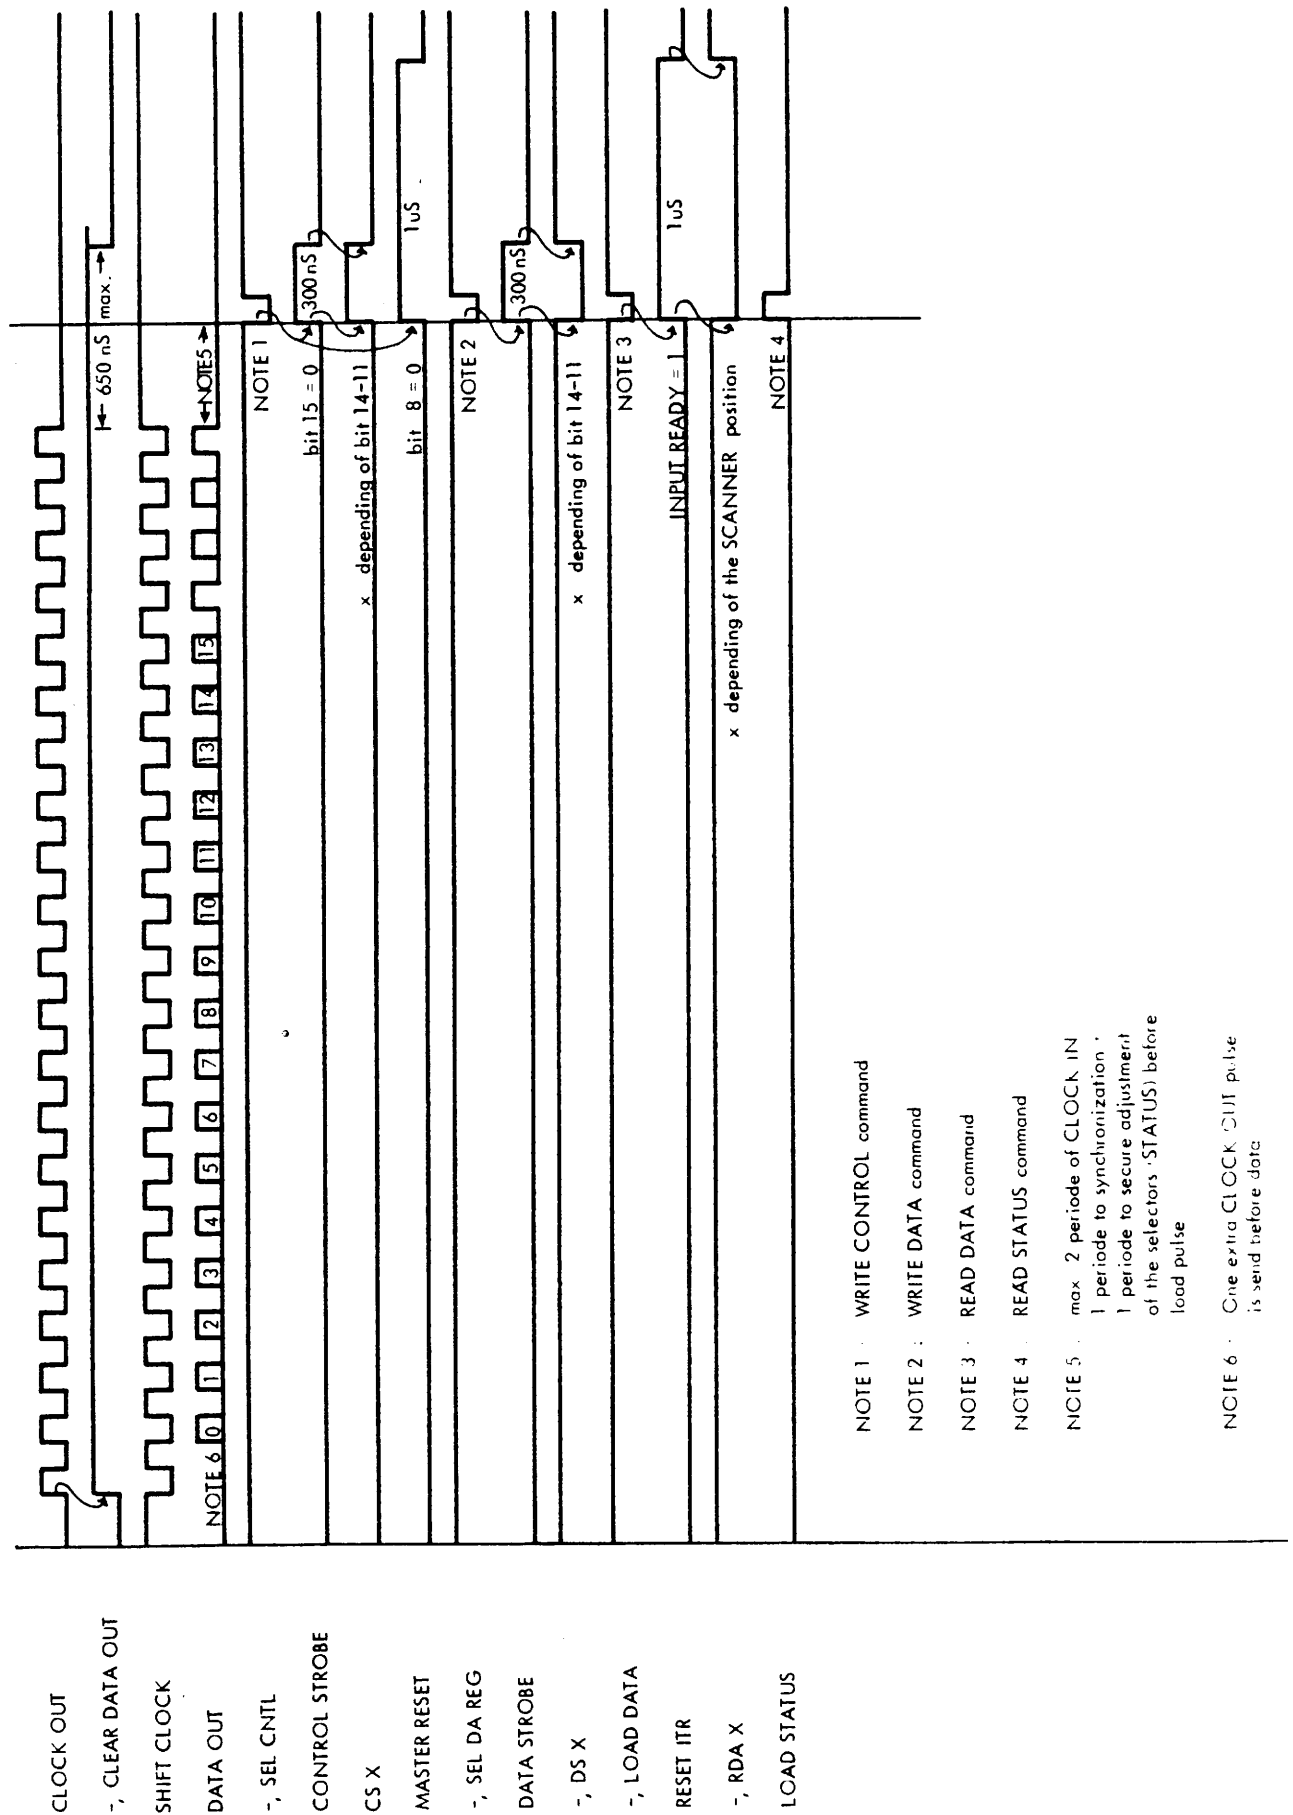

LAM 108-116


A11651

SCANNER - INTERRUPT SYSTEM

Receive Interrupt from Multiplex, Channel 2 and Transmit Interrupt from Multiplex Channel 14

TC 2

Timing Chart

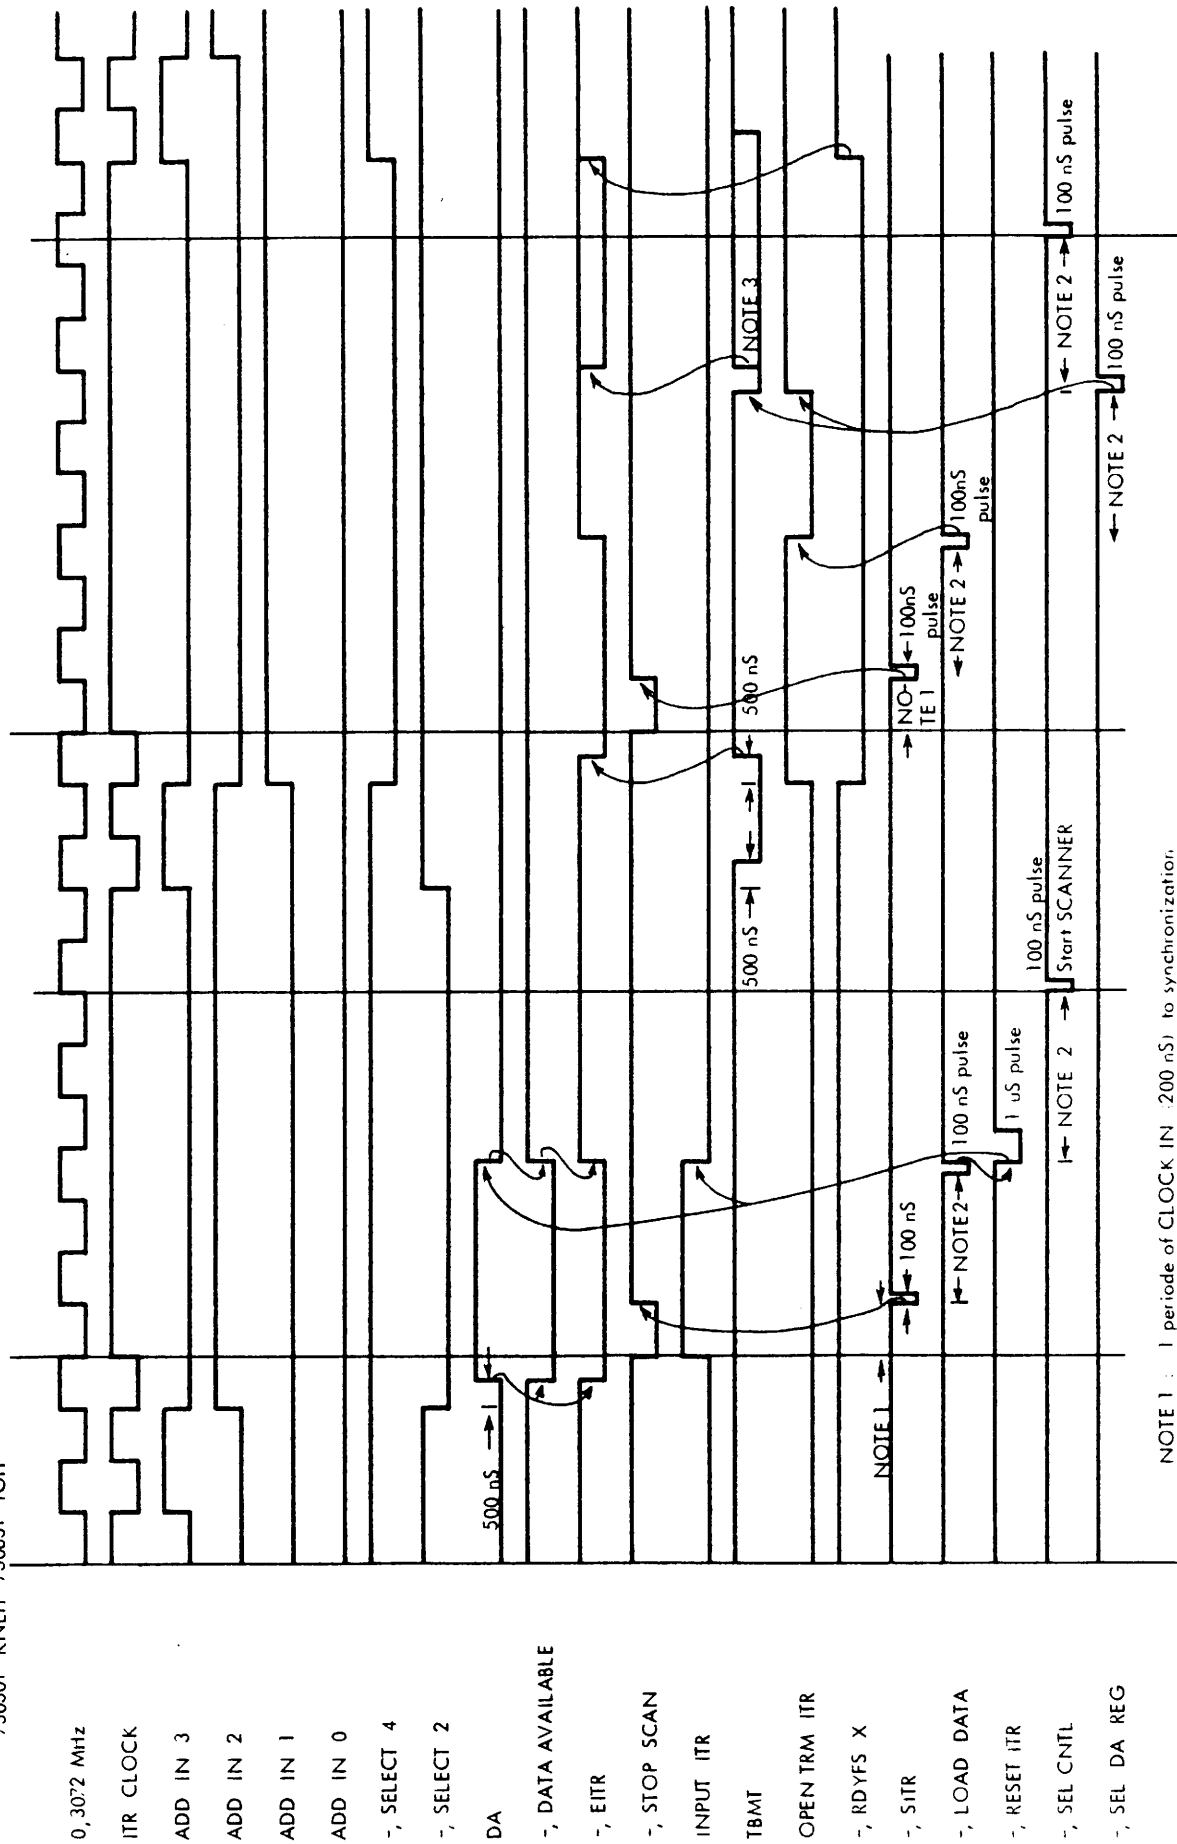


NOTE 1 : 1 periode of CLOCK IN (200 nS) to synchronization.

NOTE 2 : Time depending of the program in RC 3500


NOTE 3 Since the Transmitter is double buffered, it is ready to accept a new character anywhere during transmission of character 1

730828 KNEH 730830 IGH

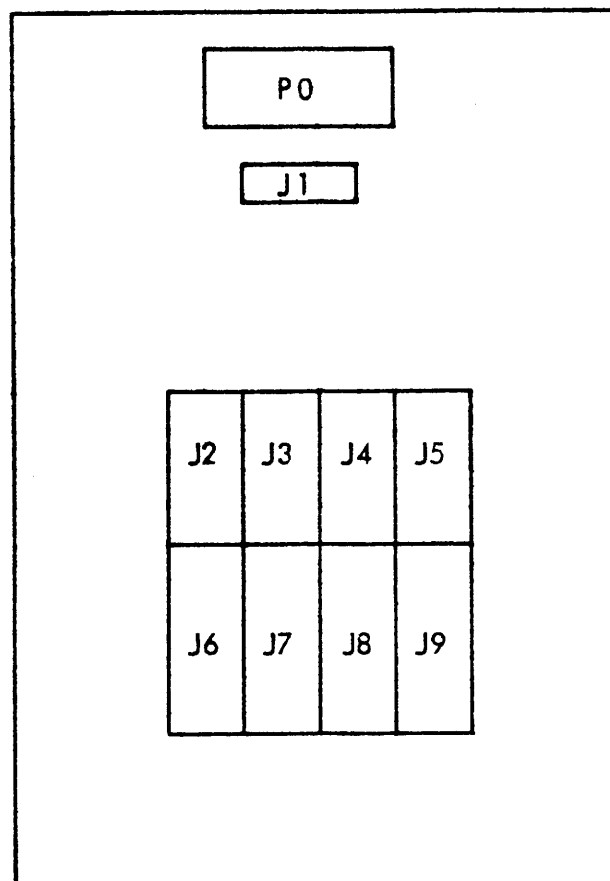

OUTSIDE VIEW

730828 KNEH 730830 IGH

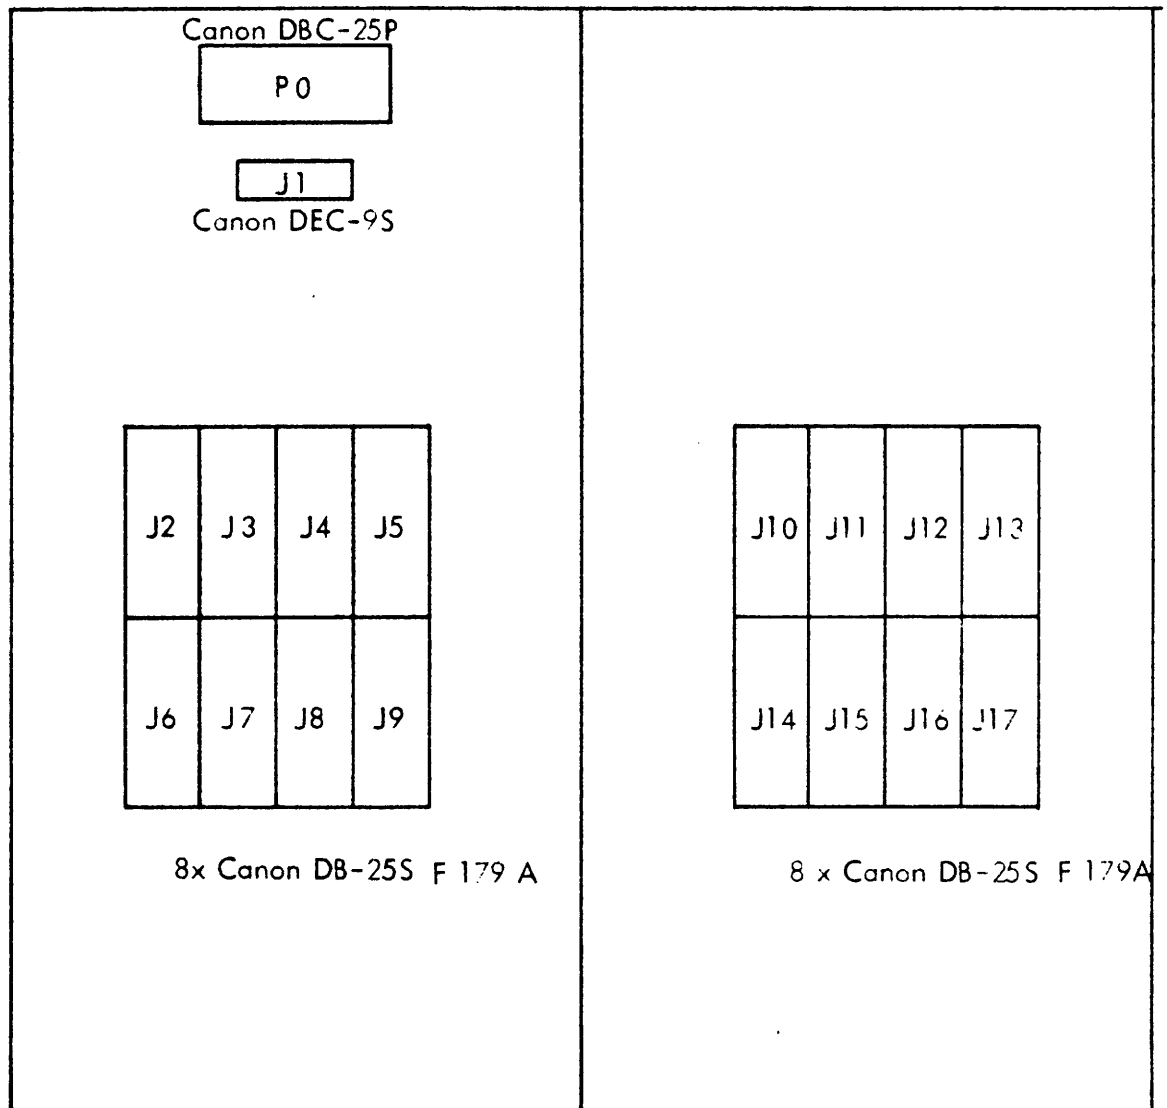

OUTSIDE VIEW

LAM 116

JACK SURVEY LAM 116

A22311

J 1 ITT Cannon, type DEC - 9S		
PIN	GEN. ADR.	SIGNAL NAME
1	5-88	CLOCK IN A
2	5-85	CLOCK IN B
3	5-83	DATA IN A
4	5-86	DATA IN B
5		
6		CLOCK OUT A
7		CLOCK OUT B
8		DATA OUT A
9		DATA OUT B

Doc 002

J 2
ITT Cannon, type DB - 25S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 0
2	4-75	Transmitted Data 0
3		Received Data 0
4	2-79	Request to send 0
5		Ready for Sending 0
6		Data Set Ready 0
7		Common Return 0
8		Data Carrier Detector 0
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-80	Connect to Line 0
21		
22		
23		
24		
25		

DESIG: 064

J 3 ITT Cannon, type DB - 255		
P.N.	GEN. ADR.	SIGNAL NAME
1		Protective Earth 1
2	4-77	Transmitted Data 1
3		Received Data 1
4	2-77	Request to Send 1
5		Ready for sending 1
6		Data Set Ready 1
7		Common Return 1
8		Data Carrier Detector 1
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-78	Connect to Line 1
21		
22		
23		
24		
25		

DocId: 3607

J 4
ITT Cannon, type DB - 25S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 2
2	4-79	Transmitted Data 2
3		Received Data 2
4	2-81	Request to Send 2
5		Ready for Sending 2
6		Data Set Ready 2
7		Common Return 2
8		Data Carrier Detector 2
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-84	Connect to Line 2
21		
22		
23		
24		
25		

DESL: 064

J 5 ITT Cannon, type DB - 25 S		
PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 3
2	4-81	Transmitted Data 3
3		Received Data 3
4	2-83	Request to Send 3
5		Ready for Sending 3
6		Data Set Ready 3
7		Common Return 3
8		Data Carrier Detector 3
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-82	Connect to line 3
21		
22		
23		
24		
25		

DSL: 064

J 6
ITT Cannon, type DB - 25 S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 4
2	4-83	Transmitted Data 4
3		Received Data 4
4	2-85	Request to Send 4
5		Ready for Sending 4
6		Data Set Ready 4
7		Common Return 4
8		Data Carrier Detector 4
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-88	Connect to Line 4
21		
22		
23		
24		
25		

DocId: 364

J 7
ITT Cannon, type DB - 255

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 5
2	4-85	Transmitted Data 5
3		Received Data 5
4	2-89	Request to Send 5
5		Ready for Sending 5
6		Data Set Ready 5
7		Common Return 5
8		Data Carrier Detector 5
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-86	Connect to Line 5
21		
22		
23		
24		
25		

DoSL: 064

J 8
ITT Cannon, type DB - 25 S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 6
2	4-87	Transmitted Data 6
3		Received Data 6
4	2-91	Request to Send 6
5		Ready for Sending 6
6		Data Set Ready 6
7		Common Return 6
8		Data Carrier Detector 6
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-92	Connect to Line 6
21		
22		
23		
24		
25		

DocId: 364

J 9 ITT Cannon, type DB - 25S		
PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 7
2	4-89	Transmitted Data 7
3		Received Data 7
4	2-87	Request to Send 7
5		Ready for Sending 7
6		Data Set Ready 7
7		Common Return 7
8		Data Carrier Detector 7
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	2-90	Connect to Line 7
21		
22		
23		
24		
25		

DBSL: 564

J 10
ITT Cannon, type DB - 25 S

P.N.	GEN. ADR.	SIGNAL NAME
1		Protective Earth 8
2	3-75	Transmitted Data 8
3		Received Data 8
4	1-79	Request to Send 8
5		Ready for Sending 8
6		Data Set Ready 8
7		Common Return 8
8		Data Carrier Detector 8
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-80	Connect to Line 8
21		
22		
23		
24		
25		

DocId: 664

J 11 ITT Cannon, type DB - 25 S		
PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 9
2	3-77	Transmitted Data 9
3		Received Data 9
4	1-77	Request to Send 9
5		Ready for Sending 9
6		Data Set Ready 9
7		Common Return 9
8		Data Carrier Detector 9
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-78	Connect to Line 9
21		
22		
23		
24		
25		

DESL: 064

J 12 ITT Cannon, type DB - 255		
PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 10
2	3-79	Transmitted Data 10
3		Received Data 10
4	1-81	Request to Send 10
5		Ready for Sending 10
6		Data Set Ready 10
7		Common Return 10
8		Data Carrier Detector 10
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-84	Connect to Line 10
21		
22		
23		
24		
25		

J 13 ITT Cannon, type DB - 255		
PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 11
2	3-81	Transmitted Data 11
3		Received Data 11
4	1-83	Request to Send 11
5		Ready for Sending 11
6		Data Set Ready 11
7		Common Return 11
8		Data Carrier Detector 11
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-82	Connect to Line 11
21		
22		
23		
24		
25		

DocId: 564

J 14 ITT Cannon, type DB - 25 S		
P.N	GEN. ADR.	SIGNAL NAME
1		Protective Earth 12
2	3-83	Transmitted Data 12
3		Received Data 12
4	1-85	Request to Send 12
5		Ready for Sending 12
6		Data Set Ready 12
7		Common Return 12
8		Data Carrier Detector 12
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-88	Connect to Line 12
21		
22		
23		
24		
25		

DISC: 064

J 15
ITT Cannon, type DB - 25S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 13
2	3-85	Transmitted Data 13
3		Received Data 13
4	1-89	Request to Send 13
5		Ready for Sending 13
6		Data Set Ready 13
7		Common Return 13
8		Data Carrier Detector 13
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-86	Connect to Line 13
21		
22		
23		
24		
25		

DESL: 064

J 16
ITT Cannon, type DB - 25S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 14
2	3-87	Transmitted Data 14
3		Received Data 14
4	1-91	Request to Send 14
5		Ready for Sending 14
6		Data Set Ready 14
7		Common Return 14
8		Data Carrier Detector 14
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-92	Connect to Line 14
21		
22		
23		
24		
25		

DASL: 064

J 17
ITT Cannon, type DB - 25 S

PIN	GEN. ADR.	SIGNAL NAME
1		Protective Earth 15
2	3-89	Transmitted Data 15
3		Received Data 15
4	1-87	Request to Send 15
5		Ready for Sending 15
6		Data Set Ready 15
7		Common Return 15
8		Data Carrier Detector 15
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20	1-90	Connect to Line 15
21		
22		
23		
24		
25		

DSL: 064

P 0		ITT Cannon, type DB - 25P				
P						
PIN	1*	T*	GEN. ADR.	SIGNAL NAME		P. 101
1				0V (COMMON RETURN) -12V		
2						
3				- 12V		
4				- 12V POS 1		
5				0V (COMMON RETURN - 12V) POS 1		
6				0V (COMMON RETURN + 12V)		
7				+ 5V		
8						
9				0V (COMMON RETURN + 5V)		
10				+ 5V		
11						
12				0V (COMMON RETURN + 5V)		
13						
14				0V (COMMON RETURN) -12V		
15						
16				-12V		
17				- 12V POS 1		
18				+ 12V		
19				0V (COMMON RETURN + 12V)		
20				+ 5V		
21						
22				0V (COMMON RETURN + 5V)		
23				+ 5V		
24						
25				0V (COMMON RETURN +5V)		

1* : Interconnection,
Length of cable;

T* : Twisted pairs.

730828 KNEH 750214 IGH

730907 KNEH 750214 IGH

0051: 066

J 0 J		ITT Cannon, type DB - 25 S				
J	25	I*	T*	GEN. ADR	SIGNAL NAME	FIN
1					0V (COMMON RETURN) - 12V	1
2						2
3					- 12V	3
4					- 12V POS 1	4
5					0V (COMMON RETURN - 12V) POS 1	5
6					0V (COMMON RETURN + 12V)	6
7					+ 5V	7
8						8
9					0V (COMMON RETURN + 5V)	9
10					+ 5V	10
11						11
12					0V (COMMON RETURN + 5V)	12
13						13
14					0V (COMMON RETURN) - 12V	14
15						15
16					- 12V	16
17					- 12V POS 1	17
18					+ 12V	18
19					0V COMMON RETURN + 12V)	19
20					+ 5V	20
21						21
22					0V (COMMON RETURN + 5V)	22
23					+ 5V	23
24						24
25					0V (COMMON RETURN + 5V)	25

I* : Interconnection.
Length of cable:

T* : Twisted pairs.

P	ITT Cannon, type DEC - 9P					
P	- - - DEC - 9P					
PIN	I	T*	GEN. ADDR	SIGNAL NAME	I	PIN
1		2		CLOCK IN A		1
2		1		CLOCK IN B		2
3		4		DATA IN A		3
4		3		DATA IN B		4
5						
6		7		CLOCK OUT A		6
7		6		CLOCK OUT B		7
8		9		DATA OUT A		8
9		8		DATA OUT B		9

I : Interconnection.
Length of cable:

T* : Twisted pairs.

73 05 01 KNEH

P 2 - P17 ITT Cannon, type DB - 25 P						
P - - - DB - 25 P						
P	P.N	I *	T *	GEN. ADR	SIGNAL NAME	P.
						PIN
1					Protective Earth	1
2			7		Transmitted Data	2
3			7		Received Data	3
4			7		Request to Send	4
5			7		Ready For Sending	5
6			7		Data Set Ready	6
7					Common Return	7
8			7		Data Carrier Detector	8
9						
10			11			
11			10		Frequency Select	
12						
13						
14						
15						11 10
16						10 11
17						
18						
19						
20			7		Connect to Line	20
21						
22						
23						
24						
25						

I* : Interconnection.

T* : Twisted pairs.

Length of cable: max. 15 m

73 05 01 KNEH

ITT Cannon, type DB - 25 P						
- - - DB - 25 S						
P	I*	T*	GEN. ADR	SIGNAL NAME	I	P.
PIN						PIN
1				Protective Earth		1
2		7		Transmitted Data		3
3		7		Received Data		2
4	5	8		Request to Send		8
5						
6	20					
7				Com. Return		7
8		4		Data Carrier Detector	5	4
9						
10						
11						
12						
13						
14						
15						
16					20	6
17					6	20
18						
19						
20	6					
21						
22						
23						
24						
25						

I* : Interconnection. T* : Twisted pairs.
Length of cable: max. 1000 m

73 05 01 KNEH

LAM 108/116

A22136

Connection of TTY

Directly to RC 35 - 103/104

Pluglist

CBL 7

P2 - 17

TO
TTY

A/S REGNECENTRALEN	Designed by	741211 KNA-M.	Drawn by		Dwg. Office Check		Design Check		Replaces Dwg. No.		due to ECN		Replaced by Dwg. No.	
	CON I CONNECT TO LINE 20 DATA SET READY 6 REQUEST TO SEND 4 READY FOR SENDING 5 DATA CARRIER DETECTOR 8 TRANSMITTED DATA 2 RECEIVED DATA 3 COMMON 7 WIRE CON II CONNECT TO LINE 20 DATA SET READY 6 DATA CARRIER DETECTOR 8 REQUEST TO SEND 4 READY FOR SENDING 5 RECEIVED DATA 3 TRANSMITTED DATA 2 COMMON 7													
	CON I : CANON DBC - 25P CON II : CANON DBC - 25P length : 0,30 m													
	Unit LAM TESTER													
	Dwg. No. A23311													
	INTER CONNECTIONS WIRE (CBL 446) Wiring Diagram													
	WD 1													