

rc 3610 S
rc 3615 S
rc 3620 S
magnetic tape units

*A SERIES OF MEDIUM-SPEED
9-TRACK TAPE UNITS.*

*EASY TO OPERATE
MAKE MINIMAL DEMANDS ON THE
OPERATING ENVIRONMENT*



General Information


RC 3610 S, 15 S and 20 S are a series of magnetic tape units using densities of 1600, 800/1600, and 800 bpi, respectively. The units handle magnetic tape coded in IBM NRZI and ANSI. RC's magnetic tape units are available mounted in both high and medium cabinet types.

Specifications

	RC 3610S	RC 3615S	RC 3620S
Read/Write Format:	9-track, 1600 bpi	9-track, 800/1600 bpi	9-track, 800 bpi
Data Transfer Rate:	40,000 bytes per second	40,000/20,000 bytes per second	20,000 bytes per second
Tape Speed:	_____ 25 inches per second	_____	_____
Rewind Speed:	_____ 150 inches per second	_____	_____
Reel Diameter:	_____ Max. 10 ¹ / ₂ inches	_____	_____
Power Requirements:	_____ 140 W, 220 V AC	_____	_____
Heat Dissipation:	_____ 344 Kcal/h	_____	_____
Ambient Temperature:	_____ 16-32° C	_____	_____

Dimensions

	High Cabinet	Low Cabinet
Height:	178 cm	140 cm
Width:	57,5 cm	57,5 cm
Depth:	80,0 cm	80,0 cm
Weight:	122 kg	102 kg

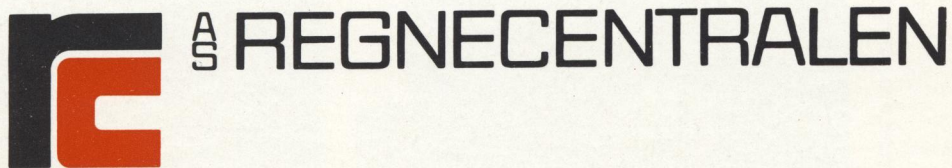

Your RC Supplier: