




RC 3641/42/43

300,600 & 900 lpm

Line Printers

- RELIABLE AND STURDY LOW COST DRUM PRINTER
- EASY TO OPERATE AND MAINTAIN
- 136 PRINT POSITIONS

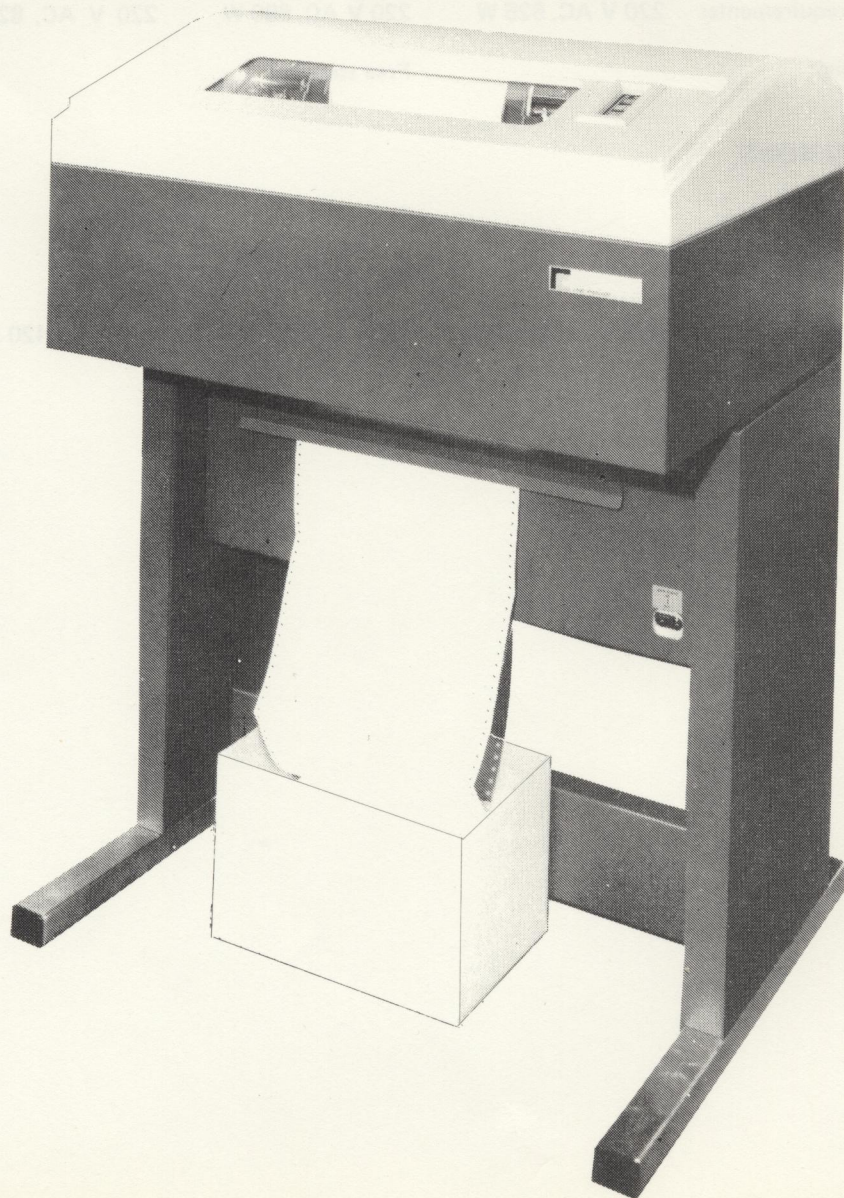

RC 3641/42/43



GENERAL

The RC 3641/42/43 Line Printers have been designed to achieve high reliability, low initial cost, and low continuing maintenance cost.

All three units are drum printers which have a basic mechanical structure using tubular and rectangular weldments instead of conventional castings.

Print drums are available in many standard versions, including OCR-B1 character set and standard alphabets.

SPECIFICATIONS

	RC 3641		RC 3642		RC 3643	
Numbers of characters in character set:	64	96	64	96	64	96
Max. print speed:	300 lpm	240 lpm	600 lpm	436 lpm	900 lpm	660 lpm
Standard feature:	12 channel VFU					
Line spacing:	6 or 8 lines per inch					
Character spacing:	10 characters per inch					
Line length:	136 characters per line					
Paper width:	4 to 16 3/4 inches					
Paper type:	Multicopy up to 6 copies					
Heat dissipation:	525W (1790 BTU/h)		680W (2320 BTU/h)		825W (2810 BTU/h)	
Power requirements:	220 V AC, 525 W		220 V AC, 680 W		220 V AC, 825 W	
Mounting:	Free standing					

DIMENSIONS

Height:	114.3 cm (45 inches)		
Width:	83.8 cm (33 inches)		
Depth:	66.0 cm (26 inches)		
Weight:	154.6 kg (340 lbs)	168.0 kg (370 lbs)	190.0 kg (420 lbs)