
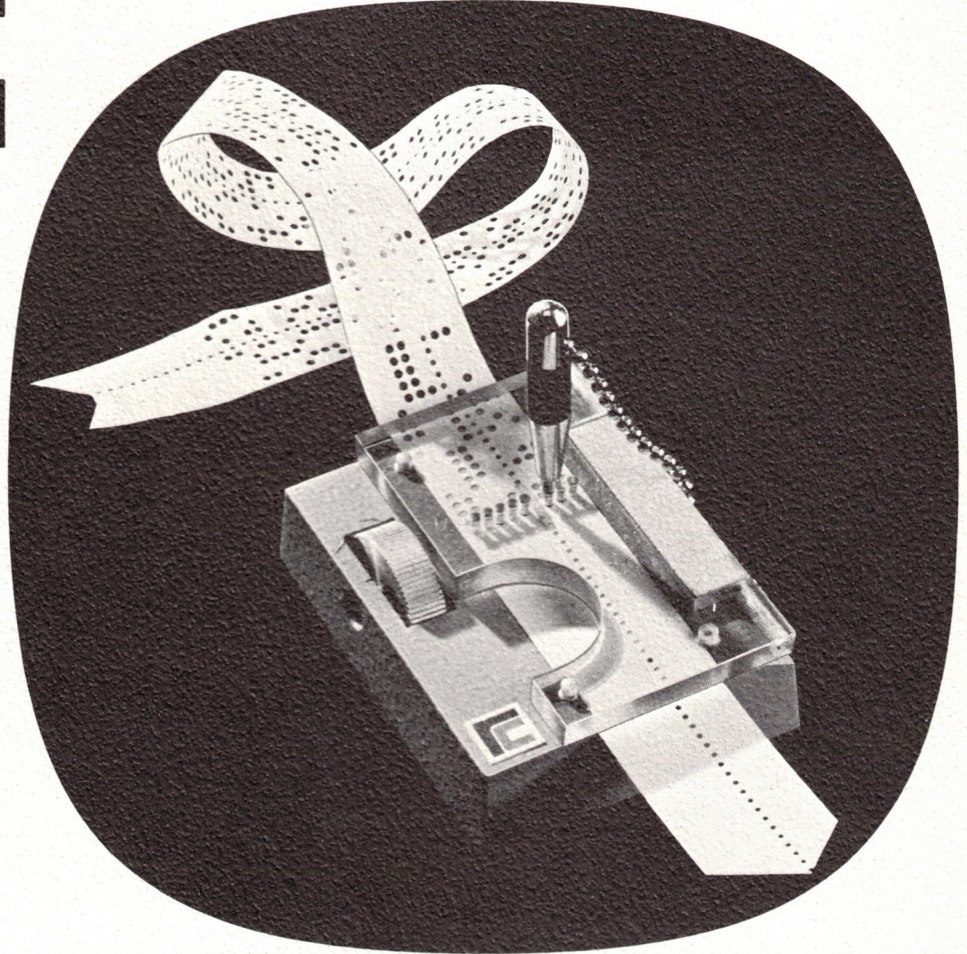


RC

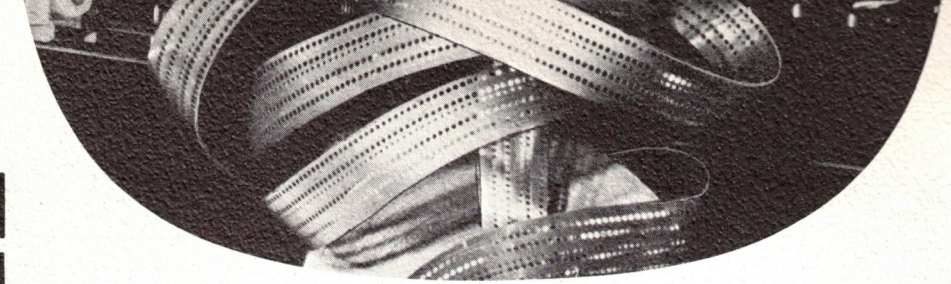

RC MINIPUNCH 8

RC Minipunch 8 permits accurate and convenient manual punching of 5, 7, and 8 track paper tapes in accordance with ISO, DIN, ECMA, USAS, BS, and similar standards.


Tracks can be punched individually, making it possible to create any existing code. Each character is visible through the transparent lid that holds the tape. A feed knob advances the tape in steps of one character by means of a cog wheel, and gives modulo 16 indication of the number of characters punched. The cog wheel is aligned with the eight punching holes in the lid, so that displacement between the feed hole and the code holes to be punched is eliminated.

The tape employed must have prepunched feed holes. It can be inserted sideways, enabling codes to be punched anywhere on the tape roll.

Size: 65x82x26 mm. Weight: 200 g. Color: bluish gray.



RC MINIPUNCH 6

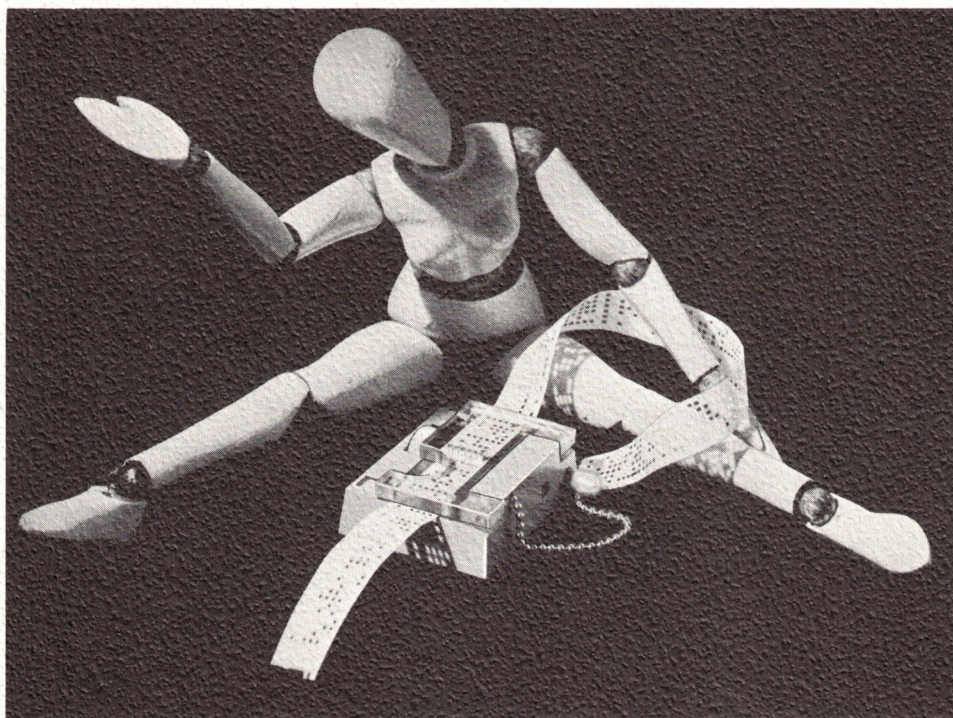

RC Minipunch 6 permits accurate and convenient manual punching of 6 track paper tape in accordance with the Olivetti standard.

Tracks can be punched individually, making it possible to create any existing code. Each character is visible through the transparent lid that holds the tape. The tape is advanced by turning a feed knob. Engraved lines indicate the minimum spacing between characters in accordance with the Olivetti standard.

The tape can be inserted sideways, enabling codes to be punched anywhere on the tape roll.

Size: 65x82x26 mm. Weight: 200 g. Color: bluish gray.

RC AS REGNECENTRALEN

SCANDINAVIAN INFORMATION PROCESSING SYSTEMS

Sales Division: Hovedvejen 9 · DK-2600 Glostrup · Denmark · Tel. (01) 96 53 66 · Telex 5468 rc dk · Cables: Indudatamat